


# Precision rail-to-rail input/output 3 MHz single operational amplifier

Datasheet - production data

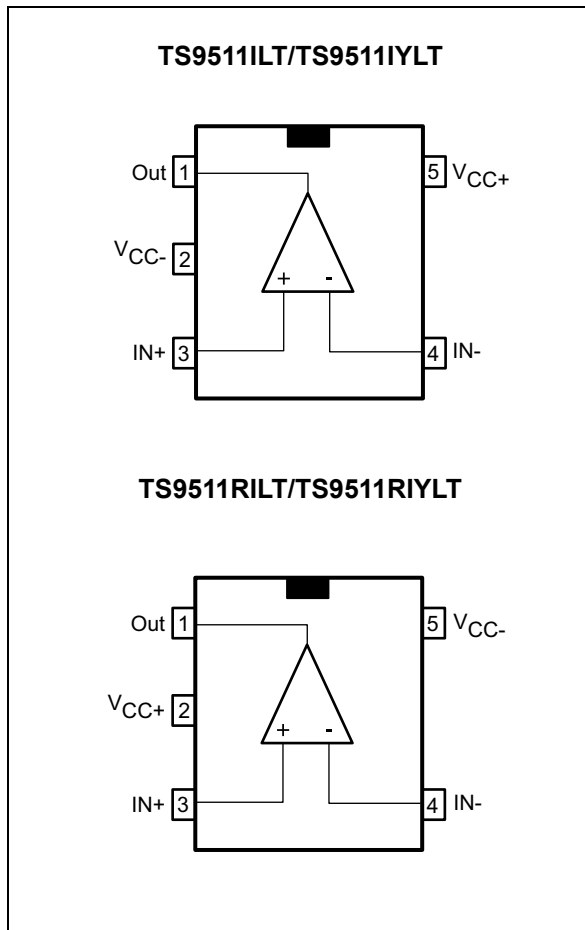

## Applications

- Signal conditioning
- Automotive applications
- Laptop/notebook computers
- Transformer/line drivers
- Personal entertainment (CD players)
- Portable communication (cell phones, pagers)
- Digital-to-analog converter buffers
- Portable headphone speaker drivers

## Description

The TS9511 device is a single, precision rail-to-rail operational amplifier whose supply voltage range extends from 2.7 V to 12 V.

Its high-precision performance associated with an SOT23-5 package make it suitable for a wide range of demanding applications, such as industrial, automotive, consumer, and computer applications.

## Features

- Good precision: 800  $\mu$ V max.
- Rail-to-rail input and output
- Wide supply voltage range: 2.7 V to 12 V
- High-speed (3 MHz, 1 V/ $\mu$ s)
- Low consumption (900  $\mu$ A at 3 V)
- Supply voltage rejection ratio: 85 dB
- Micropackage: SOT23-5

# Contents

|          |  |           |
|----------|--|-----------|
| <b>1</b> | <b>Absolute maximum ratings and operating conditions</b> ..... | <b>3</b>  |
| <b>2</b> | <b>Electrical characteristics</b> .....                        | <b>4</b>  |
| <b>3</b> | <b>Package information</b> .....                               | <b>8</b>  |
|          | 3.1 SOT23-5 package information .....                          | 9         |
| <b>4</b> | <b>Ordering information</b> .....                              | <b>10</b> |
| <b>5</b> | <b>Revision history</b> .....                                  | <b>10</b> |

# 1 Absolute maximum ratings and operating conditions

**Table 1. Absolute maximum ratings**

| Symbol     | Parameter  | Value                        | Unit |
|------------|--|------------------------------|------|
| $V_{CC}$   | Supply voltage <sup>(1)</sup>                                    | 14                           | V    |
| $V_{id}$   | Differential input voltage <sup>(2)</sup>                        | $\pm 1$                      |      |
| $V_{in}$   | Input voltage <sup>(3)</sup>                                     | $V_{DD}-0.3$ to $V_{CC}+0.3$ |      |
| $T_{stg}$  | Storage temperature range  | -65 to +150                  | °C   |
| $T_j$      | Maximum junction temperature                                     | 150                          |      |
| $R_{thja}$ | Thermal resistance junction-to-ambient <sup>(4)</sup><br>SOT23-5 | 250                          | °C/W |
| $R_{thjc}$ | Thermal resistance junction-to-case <sup>(4)</sup><br>SOT23-5    | 81                           |      |
| ESD        | HBM: human body model <sup>(5)</sup>                             | 1                            | kV   |
|            | MM: machine model <sup>(6)</sup>                                 | 100                          | V    |
|            | CDM: charged device model <sup>(7)</sup>                         | 1.5                          | kV   |
|            | Latch-up immunity  | 200                          | mA   |
|            | Lead temperature (soldering, 10 sec.)                            | 260                          | °C   |

- All voltage values, except differential voltage, are with respect to network ground terminal.
- The differential voltage is the non-inverting input terminal with respect to the inverting input terminal. If  $V_{id} > \pm 1$  V, the maximum input current must not exceed  $\pm 1$  mA. In this case ( $V_{id} > \pm 1$  V), an input series resistor must be added to limit input current.
- Do not exceed 14 V.
- Short-circuits can cause excessive heating and destructive dissipation.  $R_{th}$  are typical values.
- Human body model: a 100 pF capacitor is charged to the specified voltage, then discharged through a 1.5 k $\Omega$  resistor between two pins of the device. This is done for all couples of connected pin combinations while the other pins are floating.
- Machine model: a 200 pF capacitor is charged to the specified voltage, then discharged directly between two pins of the device with no external series resistor (internal resistor < 5  $\Omega$ ). This is done for all couples of connected pin combinations while the other pins are floating.
- Charged device model: all pins and the package are charged together to the specified voltage and then discharged directly to ground through only one pin. This is done for all pins.

**Table 2. Operating conditions**

| Symbol     | Parameter                            | Value                        | Unit |
|------------|--------------------------------------|------------------------------|------|
| $V_{CC}$   | Supply voltage                       | 2.7 to 12                    | V    |
| $V_{icm}$  | Common mode input voltage range      | $V_{DD}-0.2$ to $V_{CC}+0.2$ |      |
| $T_{oper}$ | Operating free air temperature range | -40 to +125                  | °C   |

## 2 Electrical characteristics

**Table 3. Electrical characteristics at  $V_{CC} = +3\text{ V}$ ,  $V_{DD} = 0\text{ V}$ ,  $V_{icm} = V_{CC}/2$ ,  $R_L$  connected to  $V_{CC}/2$ ,  $T_{amb} = 25\text{ }^\circ\text{C}$  (unless otherwise specified)**

| Symbol                   | Parameter  | Min.       | Typ. | Max.        | Unit                                 |
|--------------------------|--|------------|------|-------------|--------------------------------------|
| $V_{io}$                 | Input offset voltage<br>$T_{min} \leq T_{amb} \leq T_{max}$  |            |      | 800<br>1500 | $\mu\text{V}$                        |
| $\Delta V_{io}/\Delta T$ | Input offset voltage drift   |            | 2    |             | $\mu\text{V}/^\circ\text{C}$         |
| $I_{io}$                 | Input offset current<br>$T_{min} \leq T_{amb} \leq T_{max}$  |            | 1    | 30<br>80    | nA                                   |
| $I_{ib}$                 | Input bias current<br>$T_{min} \leq T_{amb} \leq T_{max}$  |            | 30   | 70<br>150   |                                      |
| CMR                      | Common mode rejection ratio<br>$T_{min} \leq T_{amb} \leq T_{max}$   | 60<br>55   | 90   |             | dB                                   |
| SVR                      | Supply voltage rejection ratio, $V_{CC} = 2.7$ to $3.3\text{ V}$<br>$T_{min} \leq T_{amb} \leq T_{max}$            | 65<br>60   | 90   |             |                                      |
| $A_{vd}$                 | Large signal voltage gain, $V_o = 2 V_{pk-pk}$ , $R_L = 600\ \Omega$<br>$T_{min} \leq T_{amb} \leq T_{max}$        | 70<br>65   | 80   |             |                                      |
| $V_{OH}$                 | High level output voltage, $R_L = 600\ \Omega$<br>$T_{min} \leq T_{amb} \leq T_{max}$                              | 2.8<br>2.8 | 2.9  |             | V                                    |
| $V_{OL}$                 | Low level output voltage, $R_L = 600\ \Omega$<br>$T_{min} \leq T_{amb} \leq T_{max}$                               |            | 80   | 250<br>250  | mV                                   |
| $I_{sc}$                 | Output short-circuit current   | 10         | 20   |             | mA                                   |
| $I_{CC}$                 | Supply current (per amplifier), no load, $V_{icm} = V_{CC}/2$<br>$T_{min} \leq T_{amb} \leq T_{max}$               |            | 0.8  | 1<br>1.2    |                                      |
| GBP                      | Gain bandwidth product<br>$R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$  |            | 3    |             | MHz                                  |
| SR                       | Slew rate<br>$R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$   |            | 1    |             | V/ $\mu\text{s}$                     |
| $\phi_m$                 | Phase margin at unit gain<br>$R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$                                     |            | 58   |             | Degrees                              |
| Gm                       | Gain margin<br>$R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$   |            | 12   |             | dB                                   |
| $e_n$                    | Equivalent input noise voltage<br>$f = 1\text{ kHz}$   |            | 25   |             | $\frac{\text{nV}}{\sqrt{\text{Hz}}}$ |
| THD                      | Total harmonic distortion<br>$V_{out} = 4 V_{pk-pk}$ , $F = 10\text{ kHz}$ , $A_V = 2$ , $R_L = 10\text{ k}\Omega$ |            | 0.01 |             | %                                    |

**Table 4. Electrical characteristics at  $V_{CC} = +5\text{ V}$ ,  $V_{DD} = 0\text{ V}$ ,  $V_{icm} = V_{CC}/2$ ,  $R_L$  connected to  $V_{CC}/2$ ,  $T_{amb} = 25\text{ °C}$  (unless otherwise specified)**

| Symbol                   | Parameter  | Min.       | Typ. | Max.        | Unit                                 |
|--------------------------|--|------------|------|-------------|--------------------------------------|
| $V_{io}$                 | Input offset voltage<br>$T_{min} \leq T_{amb} \leq T_{max}$  |            |      | 800<br>1500 | $\mu\text{V}$                        |
| $\Delta V_{io}/\Delta T$ | Input offset voltage drift   |            | 2    |             | $\mu\text{V}/\text{°C}$              |
| $I_{io}$                 | Input offset current<br>$V_{icm} = V_{CC}/2$<br>$T_{min} \leq T_{amb} \leq T_{max}$                                |            | 1    | 30<br>80    | nA                                   |
| $I_{ib}$                 | Input bias current<br>$T_{min} \leq T_{amb} \leq T_{max}$  |            | 30   | 70<br>150   |                                      |
| CMR                      | Common mode rejection ratio<br>$T_{min} \leq T_{amb} \leq T_{max}$   | 60<br>55   | 90   |             | dB                                   |
| SVR                      | Supply voltage rejection ratio, $V_{CC} = 4$ to $5\text{ V}$<br>$T_{min} \leq T_{amb} \leq T_{max}$                | 65<br>60   | 90   |             |                                      |
| $A_{vd}$                 | Large signal voltage gain, $V_o = 2 V_{pk-pk}$ , $R_L = 600\ \Omega$<br>$T_{min} \leq T_{amb} \leq T_{max}$        | 75<br>70   | 86   |             |                                      |
| $V_{OH}$                 | High level output voltage, $R_L = 600\ \Omega$<br>$T_{min} \leq T_{amb} \leq T_{max}$                              | 4.7<br>4.7 | 4.8  |             | V                                    |
| $V_{OL}$                 | Low level output voltage, $R_L = 600\ \Omega$<br>$T_{min} \leq T_{amb} \leq T_{max}$                               |            | 80   | 300<br>300  | mV                                   |
| $I_{sc}$                 | Output short-circuit current   | 10         | 20   |             | mA                                   |
| $I_{CC}$                 | Supply current (per amplifier), no load, $V_{icm} = V_{CC}/2$<br>$T_{min} \leq T_{amb} \leq T_{max}$               |            | 0.95 | 1.2<br>1.3  |                                      |
| GBP                      | Gain bandwidth product<br>$R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$  |            | 3    |             | MHz                                  |
| SR                       | Slew rate<br>$R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$   |            | 1    |             | $\text{V}/\mu\text{s}$               |
| $\phi_m$                 | Phase margin at unit gain<br>$R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$                                     |            | 61   |             | Degrees                              |
| Gm                       | Gain margin<br>$R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$   |            | 13   |             | dB                                   |
| $e_n$                    | Equivalent input noise voltage<br>$f = 1\text{ kHz}$   |            | 25   |             | $\frac{\text{nV}}{\sqrt{\text{Hz}}}$ |
| THD                      | Total harmonic distortion<br>$V_{out} = 4 V_{pk-pk}$ , $F = 10\text{ kHz}$ , $A_V = 2$ , $R_L = 10\text{ k}\Omega$ |            | 0.01 |             | %                                    |

Figure 1. Supply current vs. supply voltage

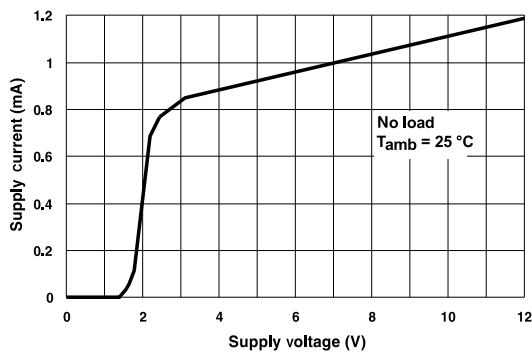


Figure 2. Supply current vs. temperature

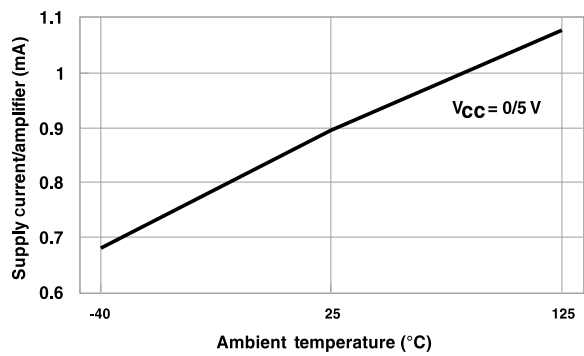


Figure 3. Output short-circuit current vs. output voltage

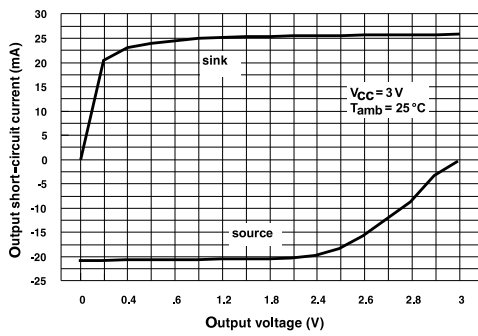


Figure 4. Output short-circuit current vs. temperature

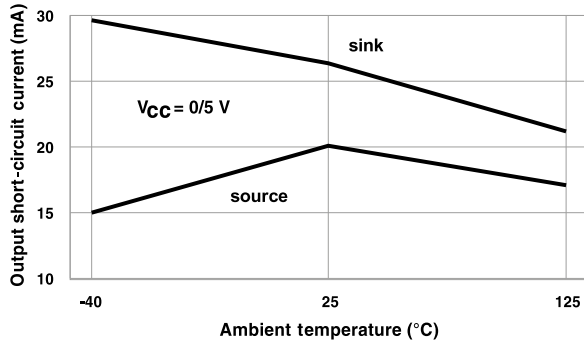


Figure 5. Voltage gain and phase vs. frequency, RL = 600 Ω, CL = 100 pF







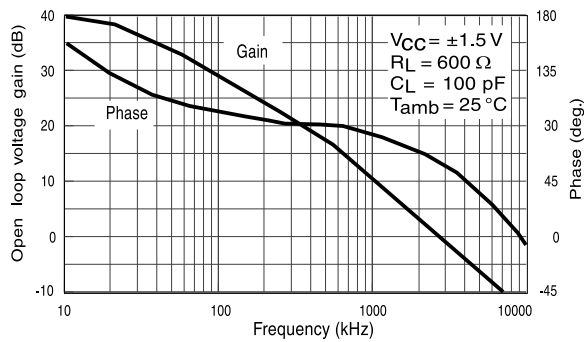


Figure 6. Voltage gain and phase vs. frequency, RL = 10 kΩ, CL = 100 pF





**Figure 11. Equivalent input noise voltage vs. frequency**

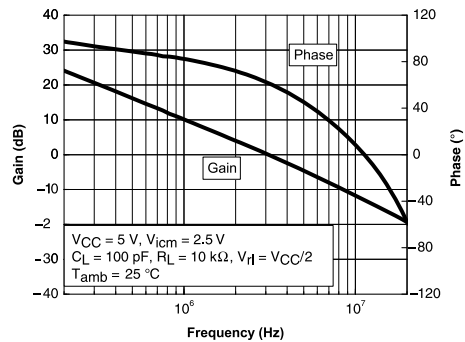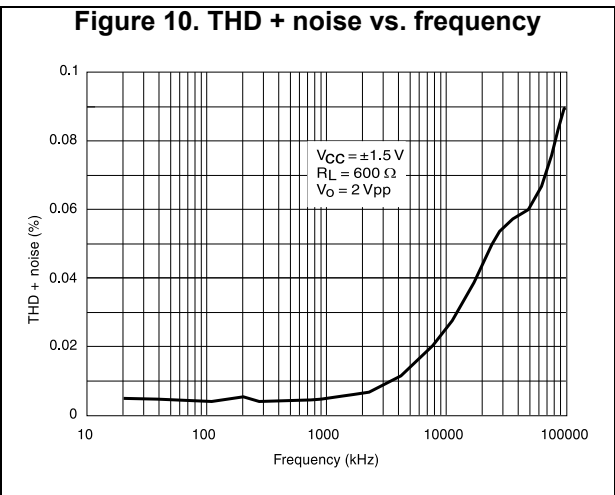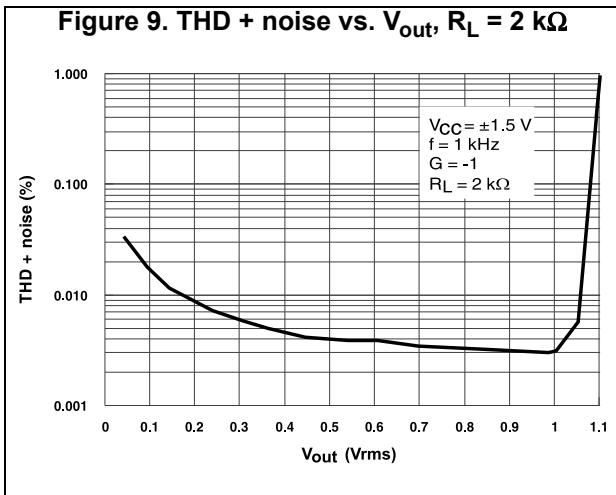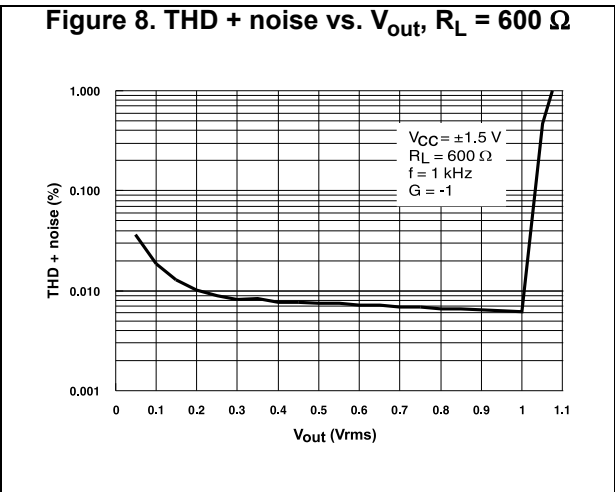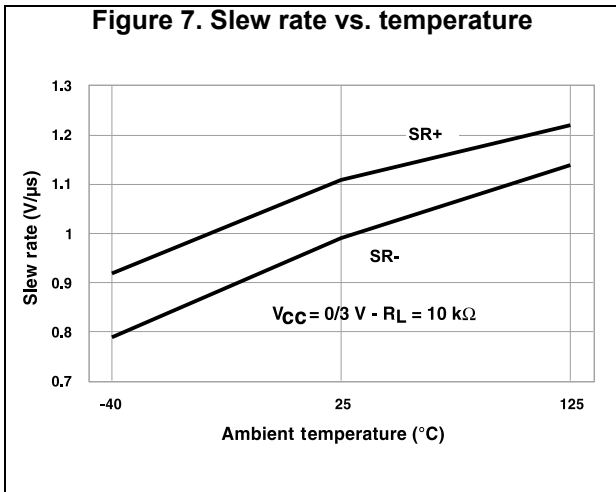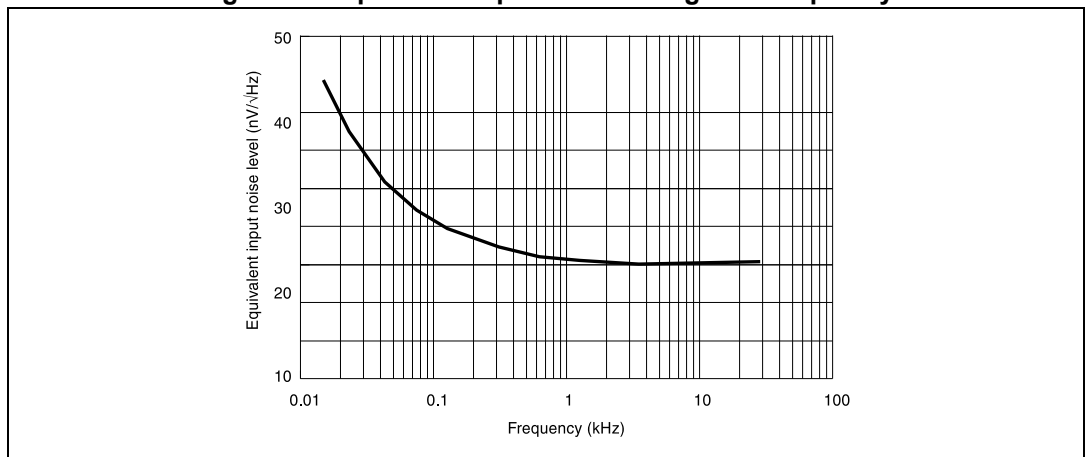

### 3 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK is an ST trademark.



### 3.1 SOT23-5 package information

Figure 12. SOT23-5 package outline

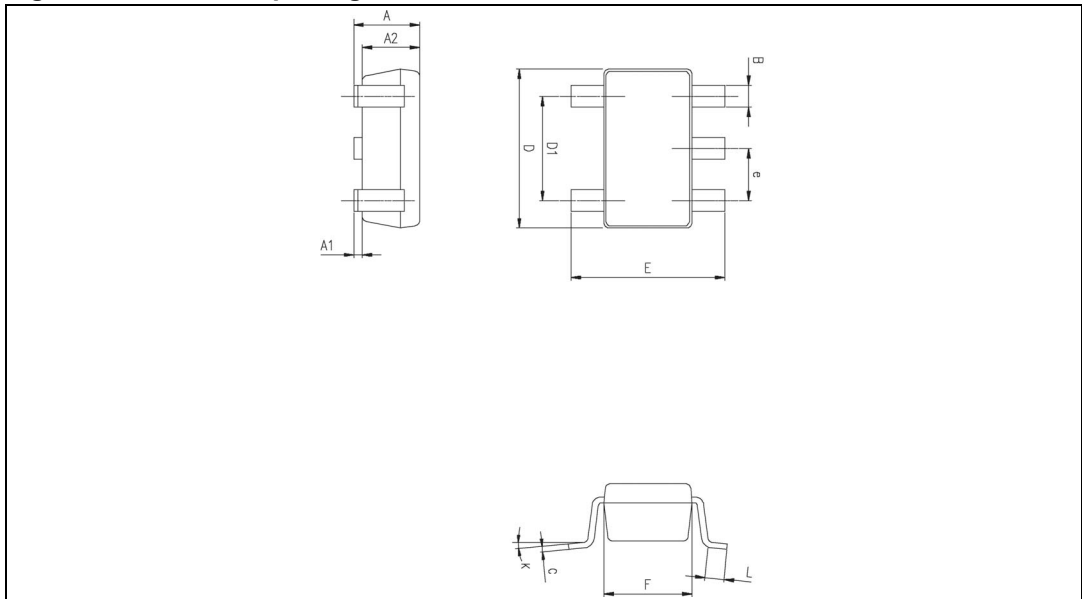


Table 5. SOT23-5 package mechanical data

| Symbol | Dimensions  |      |            |           |       |            |
|--------|-------------|------|------------|-----------|-------|------------|
|        | Millimeters |      |            | Inches    |       |            |
|        | Min.        | Typ. | Max.       | Min.      | Typ.  | Max.       |
| A      | 0.90        | 1.20 | 1.45       | 0.035     | 0.047 | 0.057      |
| A1     |             |      | 0.15       |           |       | 0.006      |
| A2     | 0.90        | 1.05 | 1.30       | 0.035     | 0.041 | 0.051      |
| B      | 0.35        | 0.40 | 0.50       | 0.013     | 0.015 | 0.019      |
| C      | 0.09        | 0.15 | 0.20       | 0.003     | 0.006 | 0.008      |
| D      | 2.80        | 2.90 | 3.00       | 0.110     | 0.114 | 0.118      |
| D1     |             | 1.90 |            |           | 0.075 |            |
| e      |             | 0.95 |            |           | 0.037 |            |
| E      | 2.60        | 2.80 | 3.00       | 0.102     | 0.110 | 0.118      |
| F      | 1.50        | 1.60 | 1.75       | 0.059     | 0.063 | 0.069      |
| L      | 0.10        | 0.35 | 0.60       | 0.004     | 0.013 | 0.023      |
| K      | 0 degrees   |      | 10 degrees | 0 degrees |       | 10 degrees |

## 4 Ordering information

**Table 6. Order codes**

| Order code                 | Temperature range | Package                        | Packing       | Marking |
|----------------------------|-------------------|--------------------------------|---------------|---------|
| TS9511ILT                  | -40 °C to +125 °C | SOT23-5L                       | Tape and reel | K1A1    |
| TS9511RILT                 |                   |                                |               | K1A3    |
| TS9511IYLT <sup>(1)</sup>  |                   | SOT23-5L<br>(automotive grade) |               | K1A2    |
| TS9511RIYLT <sup>(1)</sup> |                   |                                |               | K1A4    |

1. Qualified and characterized according to AEC Q100 and Q003 or equivalent, advanced screening according to AEC Q001 and Q 002 or equivalent.

## 5 Revision history

**Table 7. Document revision history**

| Date        | Revision | Changes   |
|-------------|----------|---|
| 25-Jun-2009 | 1        | Initial release.  |
| 17-Dec-2009 | 2        | Modified CMR, SVR, $A_{vd}$ , $V_{OH}$ , $V_{OL}$ , $I_{SC}$ and $I_{CC}$ values in <a href="#">Table 3</a> and <a href="#">Table 4</a> .   |
| 19-Sep-2012 | 3        | Updated title of <a href="#">Figure 8</a> and <a href="#">Figure 9</a> (added conditions).<br>Updated TS9511IYLT order code (qualified status) in <a href="#">Table 6</a> .<br>Minor corrections throughout document. |
| 23-Nov-2012 | 4        | Updated <a href="#">Table 5</a><br>Updated markings of <a href="#">Table 6</a>  |
| 17-Jul-2013 | 5        | Added two new order codes: TS9511RILT and TS9511RIYLT with associated new pinout configuration.<br><a href="#">Table 6</a> : added footnote 1.  |
| 25-Jul-2013 | 6        | Updated pinout numbers in cover page.   |

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**ST PRODUCTS ARE NOT AUTHORIZED FOR USE IN WEAPONS. NOR ARE ST PRODUCTS DESIGNED OR AUTHORIZED FOR USE IN: (A) SAFETY CRITICAL APPLICATIONS SUCH AS LIFE SUPPORTING, ACTIVE IMPLANTED DEVICES OR SYSTEMS WITH PRODUCT FUNCTIONAL SAFETY REQUIREMENTS; (B) AERONAUTIC APPLICATIONS; (C) AUTOMOTIVE APPLICATIONS OR ENVIRONMENTS, AND/OR (D) AEROSPACE APPLICATIONS OR ENVIRONMENTS. WHERE ST PRODUCTS ARE NOT DESIGNED FOR SUCH USE, THE PURCHASER SHALL USE PRODUCTS AT PURCHASER'S SOLE RISK, EVEN IF ST HAS BEEN INFORMED IN WRITING OF SUCH USAGE, UNLESS A PRODUCT IS EXPRESSLY DESIGNATED BY ST AS BEING INTENDED FOR "AUTOMOTIVE, AUTOMOTIVE SAFETY OR MEDICAL" INDUSTRY DOMAINS ACCORDING TO ST PRODUCT DESIGN SPECIFICATIONS. PRODUCTS FORMALLY ESCC, QML OR JAN QUALIFIED ARE DEEMED SUITABLE FOR USE IN AEROSPACE BY THE CORRESPONDING GOVERNMENTAL AGENCY.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2013 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[STMicroelectronics:](#)

[TS9511ILT](#) [TS9511RIYLT](#) [TS9511IYLT](#)