

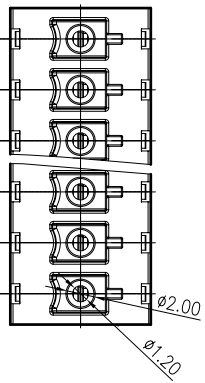

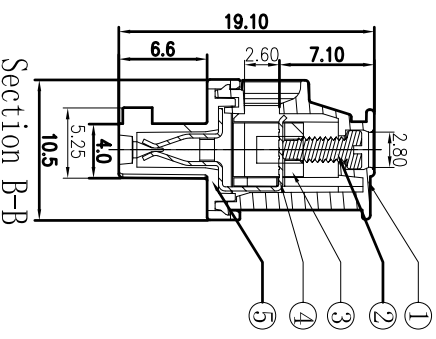

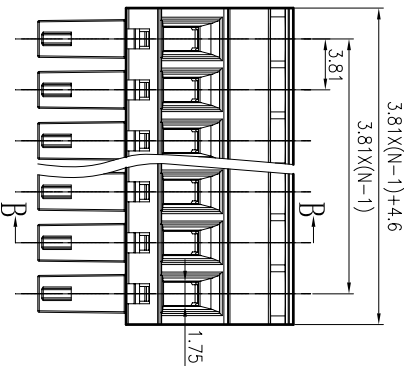


Notes:

1. Pitch: 3.81mm, Poles: 2-24P
2. Rated voltage/current: UL 300V/8A
VDE 250V/7A
3. Operation temperatures: -40°C~+105°C
4. Withstanding Voltage: AC2000V/1min
5. Insulation Resistance: 5000MΩ/DC1000V
6. Wire Range: 28~16AWG, 0.5~1.5mm²
7. Max. Torque
Value: M2, 2.04kgf.cm (1.77lb. in)
8. Undimensioned Tolerances:

Pitch range in mm	Nominal dimension range in mm	
over 6 to 10	over 10 to 30	over 30 to 60
to 10	to 24	to 60
		to 100
		to 150
		to 200
		to 250
		to 300
		to 400
		to 500
		to 600
		to 800
		to 1000
		to 1200
		to 1500
		to 2000
		to 2500
		to 3000
		to 4000
		to 5000
		to 6000
		to 8000
		to 10000



ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
5	15EDGKA/B-3.81-100A-Cover	1	1	PA66	UL94V-0
4	15EDGKA/B-100A-Clamp	1033B00020(H)	XX	Phosphor bronze	SnCe
3	15EDGK Cage	X000000010(H)	XX	Brass	Ni Plated
2	15EDG Screw-M2.0	S000001360(H)	XX	Steel	Cr ³⁺ Zn
1	15EDGKA/B-3.81-100A-Housing	1041A0YXXE(H)	1	PA66	UL94V-0

DETACHED LISTS		NAME	
TOLERANCES EXCEPT AS NOTED	UNIT	DRAWING NO.	15EDGKA-3.81-E100
MATERIAL:	FINISH:	/PART NO.	A3
ANGLES ± 1°	SCALE: 1:1	DO NOT SCALE DRAWING	SHEET 1 OF 1
THIRD ANGLE PROJECTION			

8 7 6 5 4 3 2 1