

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE

NOTES1:

UL Standard

- Rated voltage/current : 300V / 20A
- Withstanding voltage : AC1600V/1Min.
- Torque value : M2.5 , 3.54Lb.in
- Wire range : 28~12AWG

IEC Standard

1. Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(kV)	4.0kV
Rate Voltage(V)	320V
Rate Current(A)	17.5A

NOTES2:







- Dimension shall be interpreted per ASME Y14.5-2009
- Pitch : 5.00mm, Poles : N=02~16P
- Stripping length : 7~8mm
- Operating temperature : -40C~+105C
- Undimensioned tolerances:

Pitch range	in mm	in mm	in mm	in mm	in mm	in mm	in mm
Over	6	Over	10	Over	30	Over	100
To	10	To	10	To	60	To	150
6	10	24	30	60	100	150	±2
RoHS Compliance							

6. RoHS Compliance

2EDGP - 5.0 - XXP - 1Y - 100A (H)

(Series No.) (Pitch) (Poles) (Single Pitch) (Color) : 1.(Grey) 2.(Blue) 3.(Black) 4.(Green) 5.(Orange) 6.(Red) 7.(Transparent) 8.(Yellow) 9.(White)

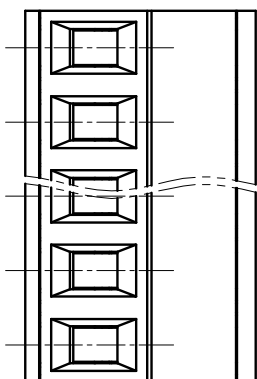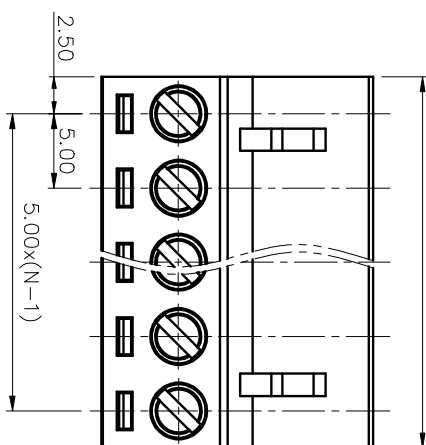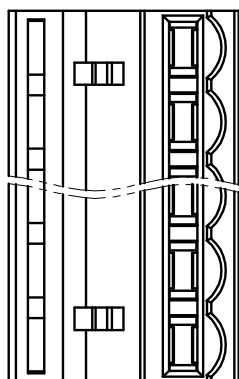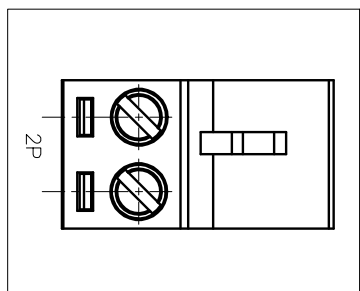

1. (Grey)

2. (Blue)

3. (Black)

4. (Green)

5. (Orange)

6. (Red)

7. (Transparent)

8. (Yellow)

9. (White)

DETACHED LISTS

PART NO.:	/	NAME:	DEGSON 宁波德森电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
APPD:	/	TITLE:	CUSTOMER DRAWING	
CHKD:	/	DRAWING NO.:	/	SHEET
DRFT:	/	DO NOT SCALE DRAWING	SCALE	1:1
THIRD ANGLE PROJECTION				