
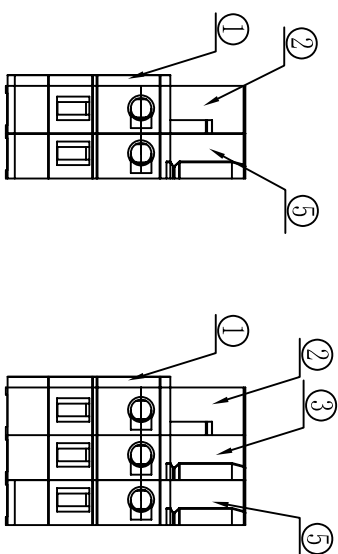



REVISION RECORD			
REV	ECO	DESCRIPTION	DRFT DATE
△		增加U壳字	Zenisy 09/06/08*
△		边件+中间件1/2改模	HXC 01/09/09*
△	I-0303	增加UDE, CE刻字及参数	Jordan, Y 08/06/10*

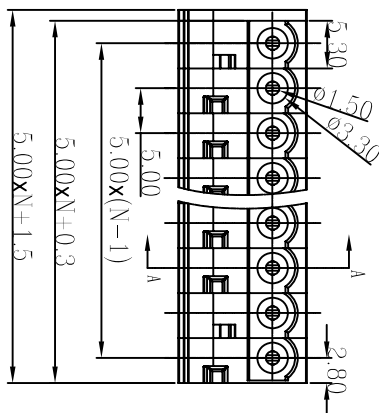





*02P

*03P

Notes:

1. Pitch: 5.0mm, Poles: XXP
2. Rated voltage/current: UL 300V/15A
VDE 320V/20A
3. Operation temperatures: -40°C ~ +105°C
4. Withstanding Voltage: AC2000V/1Min
5. Insulation Resistance: 5000MΩ/DC1000V
6. Wire Range: 22~14AWG, 2.5mm²
7. Undimensioned Tolerances:

Pitch	range in mm		Nominal dimension range in mm					
	over	to	over	to	over	to	over	
6	to	10	to	30	to	60	to	100
10	to	24	to	60	to	100	to	150
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	±0.005/0.01

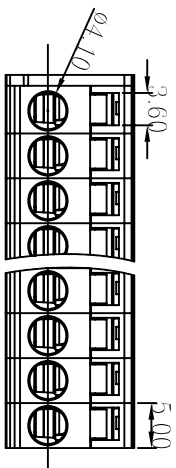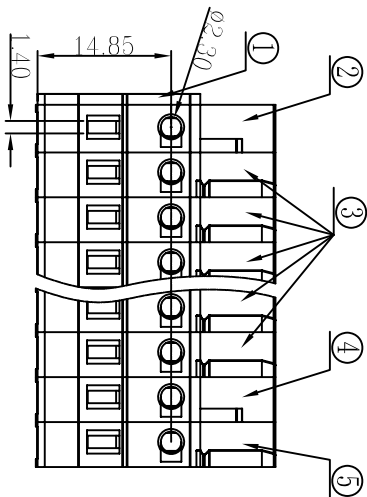

A B C D E F G H

7	DC242-SPRING	X000000990(H)	XX	Stainless Steel
6	8EDGK-CLAMP	1086B00010(H)	XX	Phosphor Bronze
5	8EDGK-5.0-HOUSING (边件*2)	1086A4101C(H)	1	PA66
4	8EDGK-5.0-HOUSING (中间件*2)	1086A4101B(H)	1. (X≥4) 0. (X≤3)	PA66
3	8EDGK-5.0-HOUSING (中间件1)	1086A4101A(H)	X=1. (X≥4) X=2. (X≤3)	PA66

8 7 6 5 4 3 2 1

ITEM	1	2
NAME OF PART	8EDGK-5.0-COVER (盖板)	8EDGK-5.0-HOUSING (边件1)
NO. OF PART	1086C4101A(H)	1086A4101D(H)
Q'TY	1	1
MATERIAL	PA66	PA66
NOTES	UL94V-0	UL94V-0

DETACHED LISTS			
MM	INCH	DATE	DATE
0.00 ±	±	07/03/07*	
ANGLES ± 1°	±		
MATERIAL:			
FINISH:			
SCALE: 1:1			
DRAWING NO. 8EDGK-5.0-EO2		NAME 8EDGK-5.0-XXP-11-01A(H)	
/PART NO.		DEGSON 宁波高正电子有限公司	
DO NOT SCALE DRAWING		DEGSON ELECTRONICS CO., LTD.	
SHEET 1	OF 1	SIZE A4	REV 13 09/06/10*