
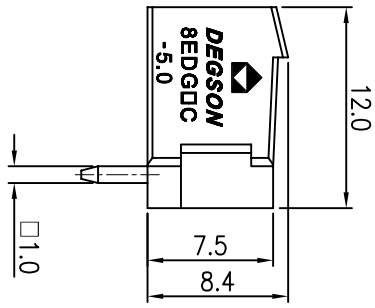


- Notes:
1. Pitch: 5.0mm , Poles: 2-24P
 2. Rated voltage/current: UL 300V/15A
VDE 320V/20A
 3. Operation temperatures: -40°C~+105°C
 4. Withstanding Voltage: AC2000V/1Min
 5. Insulation Resistance: 5000MΩ /DC1000V
 6. Undimensioned Tolerances:

Pitch range in mm	Nominal dimension range in mm									
over 6	over 10	over 30	over 50	over 60	over 100	over 150	over 300	over 500	over 1000	over 1500
to 10	to 24	to 30	to 60	to 100	to 150	to 300	to 500	to 1000	to 1500	to 3000
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	±0.005/0	±0.005/0	±0.005/0



ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
1	8EDGRC-5.0 Housing	1089A41XXA (H)	1	PA66	UL94V-0
2	2EDGR-Pin header	1008B00040 (H)	XX	Brass	Snce plated

DETSCHED LISTS	DATE	BY	REASON
DATE	06/08/07		
CHKD			
MFO			
APPVL			

NAME	DEGSON	宁波高正电子有限公司
DEGSON	DEGSON ELECTRONICS CO., LTD	
NAME	8EDGRC-5.0-XXP-11-01A(H)	
DRAWING NO.	8EDGRC-5.0-E01	
/PART NO.	AS3	REV T4
		09/29/10

