
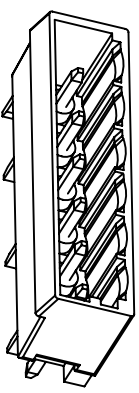



Notes:

1. Pitch: 5.0mm , Poles: 2-24P
2. Rated voltage/current: UL 300V/15A VDE 320V/20A
3. Operation temperatures: -40°C~+105°C
4. Withstanding Voltage: AC2000V/1Min
5. Insulation Resistance: 5000M Ω /DC1000V
6. Undimensioned Tolerances:

Pitch range in mm	over	to	over	to	over	to	over	to	over	to	over	to	over	to	over	to	over	to
6 to 10	±0.10	±0.15	±0.20	±0.25	±0.30	±0.35	±0.40	±0.45	±0.50	±0.55	±0.60	±0.65	±0.70	±0.75	±0.80	±0.85	±0.90	±0.95

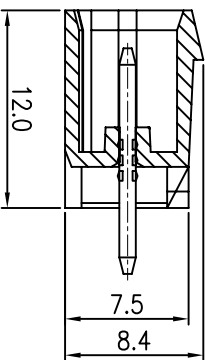

REV	ECN	DESCRIPTION	DRT	DATE
△	10-0325	增加“VDE”刻字		Final Lam 09/29/10

REVISION RECORD

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
2	2EDGV-Pin header	1007B00030 (H)	XX	Brass	Since plated
1	8EDGVC-5.0 Housing	108940YXXA (H)	1	PA66	UL94V-0

DETACHED LISTS	
MM	(INCH)
0.05 ±	±
0.10 ±	±
0.20 ±	±
0.30 ±	±
0.50 ±	±
1.00 ±	±
1.50 ±	±
2.00 ±	±
3.00 ±	±
4.00 ±	±
5.00 ±	±
6.00 ±	±
8.00 ±	±
10.00 ±	±
15.00 ±	±
20.00 ±	±
30.00 ±	±
40.00 ±	±
50.00 ±	±
60.00 ±	±
80.00 ±	±
100.00 ±	±
150.00 ±	±
200.00 ±	±
300.00 ±	±
400.00 ±	±
500.00 ±	±
600.00 ±	±
800.00 ±	±
1000.00 ±	±

NAME	DEGSON	DEGSON ELECTRONICS CO., LTD
8EDGVC-5.0-XXP-1Y-00A(H)		
DRAWING NO. 8EDGVC-5.0-E03		
/PART NO.		
SCALE : 1:1		
DO NOT SCALE DRAWING		
SHEET 1		
OF 1		