



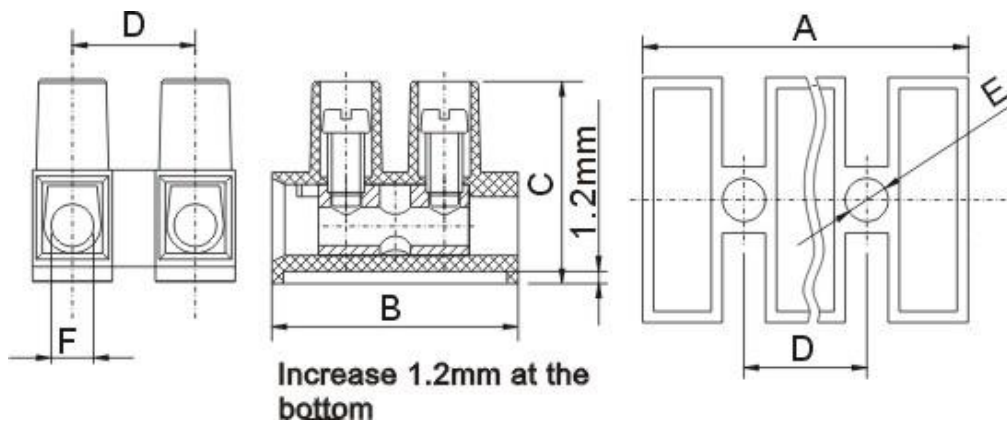

Model	Wire range	IEC (datasheet)		UL (datasheet)		Dimensions (mm/in.)						
		Rated current	Rated voltage	Rated current	Rated voltage	Unit	A	B	C	D	E	F
DG8H-1.2	1.5mm ²	17.5A	300V	15A	300V	(mm)	96.00	17.80	15.50	8.20	φ3.00	2.80
DG10H-1.2	2.5mm ²	24A	300V	20A	300V	(mm)	116.70	20.00	16.90	10.00	φ3.50	3.30
DG12H-1.2	6.0mm ²	41A	300V	30A	300V	(mm)	140.70	23.80	19.00	12.00	φ3.90	3.90
DG14H-1.2	10.0mm ²	57A	300V	50A	300V	(mm)	158.00	25.60	25.20	13.50	φ4.40	4.80
DG16H-1.2	16.0mm ²	76A	300V	65A	300V	(mm)	169.80	28.00	23.00	14.50	φ4.20	6.00
DG18H-1.2	25.0mm ²	101A	600V	85A	600V	(mm)	194.40	36.90	28.70	16.50	φ4.20	7.50

- ※ Housing material: PA66 UL94V-2
- ※ Current carrier: Alloy, Ni-plated
- ※ Screws: Steel, Cr³⁺Zn-plated
- ※ Ambient temperature: -40°C ~ T110°C
- ※ Poles available: 2-12P

HOW TO ORDER :

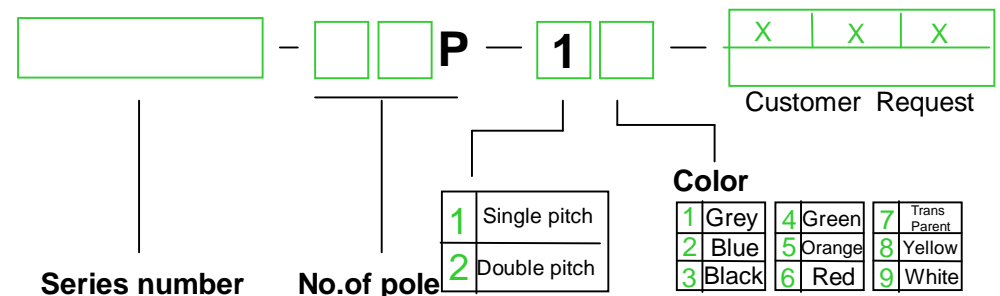

	 DEGSON ELECTRONICS CO., LTD.
	NAME DG8H-1.2 DG10H-1.2 DG12H-1.2 DG14H-1.2 DG16H-1.2 DG18H-1.2