
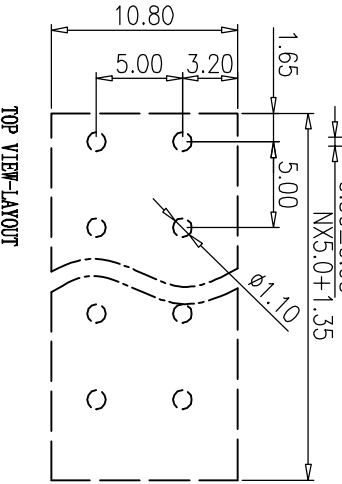


W/O COVER VIEW

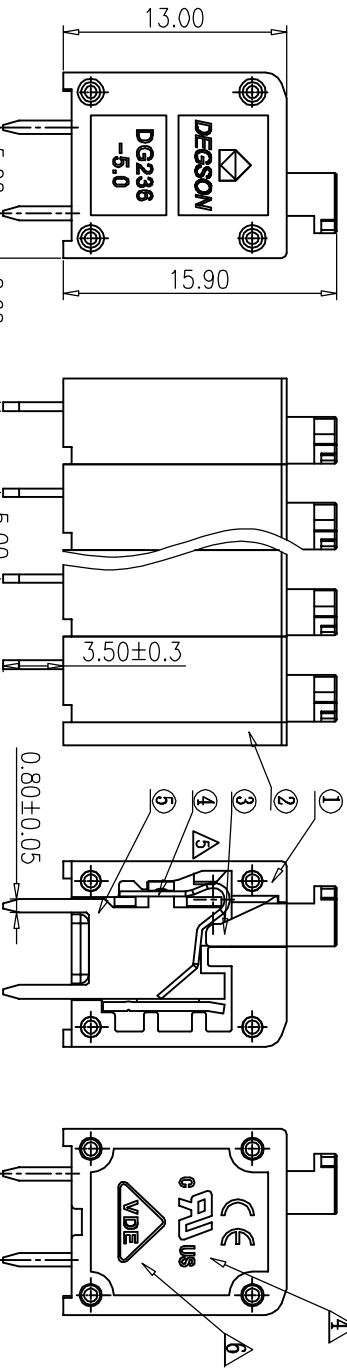

REV	ECO	DESCRIPTION	DFT	DATE
T1		變更線材	HW	06/04/06*
T2		變更線材	CSX	07/05/07*
T3		品名、材料物種與標示"0"	LJH	12/08/07*
T4		增加、更改字	CSX	02/25/08*
T5	09-0025	特殊線、產品、標記與材料	CW	08/28/08*
T6	09-0084	增加"0"與字及參數	Zengy	10/14/09*

Notes:

- Pitch: 5.0 mm
- Rated voltage/current: UL 300V 8A
VDE 400V 10A
- Operation temperatures: -40° C~+105° C
- Withstanding Voltage: AC1500V/1Min
- Insulation Resistance: 5000MΩ/DC1000V
- Wire Range: 20 16AWG 0.2~1.5mm²
- Undimensioned Tolerances:

Pitch range in mm	Nominal dimension range					
	over	over	over	over	over	over
to 6	10	to 10	30	to 60	100	150
to 10	to 24	to 30	to 60	to 100	to 150	∇
to 10, 15	to 25	±0.2	±0.3	±0.5	±0.7	±1.0

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
5	DG236-5.0 Pin header	3020B00010(H)	XX	Pure copper	Snce Plated
4	DG236-5.0 Spring	X000000590(H)	XX	Stainless Steel	
3	DG236-5.0 Button	3020D0Y01A(H)	XX	PA66	UJ.94V-0
2	DG236-5.0 Cover	3020C0Y01A(H)	1	PA66	UJ.94V-0
1	DG236-5.0 Housing	3020A0Y01A(H)	XX	PA66	UJ.94V-0

DETACHED LISTS	
MM	±
0.00 ±	±
0.00 ±	±
0.00 ±	±

ANGLE ± 1°	G.E. :
THIRD ANGLE PROJECTION	FINISH :
SCALE : 1:1	DO NOT SCALE DRAWING

DATE	DATE	DATE	DATE
12/30/04*			

DEGSON 宇峻電子有限公司
 DEGSON ELECTRONICS CO., LTD

NAME
DG236-5.0-XXP-1Y-00A(H)

DRAWING NO. DG236-5.0-E01
 /PART NO.

SIZE REV
 A3 16
 10/19/08

SHEET 1 OF 1