
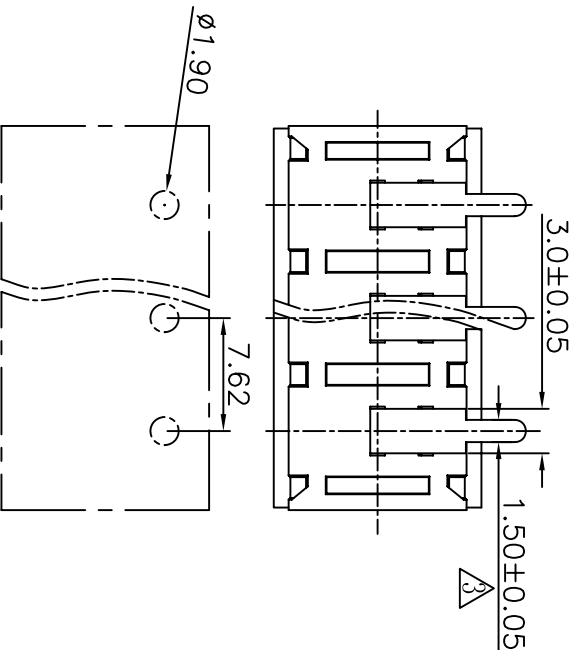


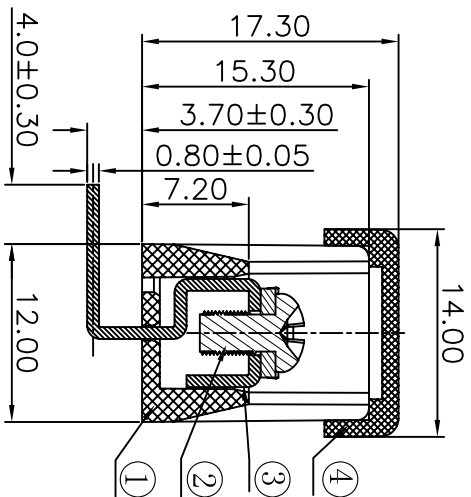
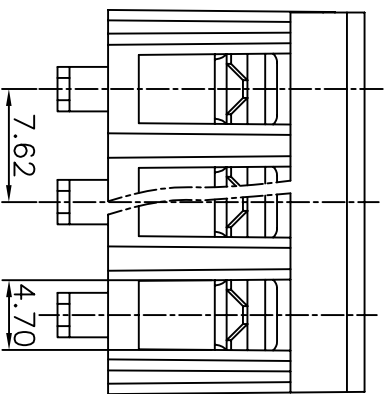


REVISION RECORD			
REV	ECO	DESCRIPTION	DRFT DATE
△		增加U1刻字	CSX 03/21/07
△		品名、料号增加环保标识“(0)”	YeJ 12/08/07
△		修改焊脚尺寸	ZengJY 04/27/08

- Notes:
1. Pitch: 7.62mm, Poles: 2-26P
  2. Rated voltage/current: UL 300V/15A  
IEC 250V/24A
  3. Operation temperatures: -40°C ~ +105°C
  4. Withstanding Voltage: AC2000V/1min
  5. Insulation Resistance: 500MΩ / DC500V
  6. Wire Range: 22~14AWG, X2.5mm<sup>2</sup>
  7. Max. Torque Value: M3, 5.10kgf.cm
  8. Undimensioned Tolerances:

Pitch range in mm	Nominal dimension range in mm	
over 6	over 30	over 100
to 10	to 60	to 150
to 10	to 24	to 30
to 10	to 30	to 60
to 10	to 30	to 100
to 10	to 30	to 150
±0.10	±0.15	±0.25
		±0.2 ±0.3 ±0.5 ±0.7 ±1.0

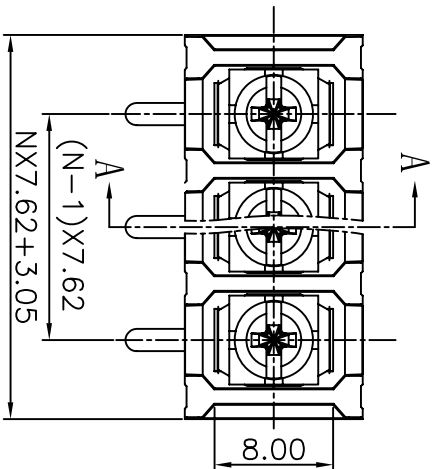

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
4	DG28-Cover	5006C07XXXA (H)	1	PC	
3	DG28R Pin header	5006B00070 (H)	XX	Brass	SnCe plated
2	M3*6 (6*6) bright Screws	S000000450 (H)	XX	Steel	Ni plated
1	DG28-B-本体	5006A0YXXA (H)	1	PA66+23%GF	UL94V-0

TOLERANCES EXCEPT AS NOTED		DEPTO ZHUJIAN	
MM	(INCH)	DATE	DATE
0.1 ±		03/13/06	
0.05 ±			
0.02 ±			
ANGLES ± 1°		MATERIAL :	
		G.E. :	
		FINISH :	
		SCALE : 1:1	

DETACHED LISTS		NAME	
THIRD ANGLE PROJECTION	SCALE : 1:1	DG28R-B-XXP-1Y-00A (H)	
		DRAWING NO. DG28R-ED2	
		/PART NO.	
		DO NOT SCALE DRAWING	
		SHEET 1 OF 1	

8 7 6 5 4 3 2 1