
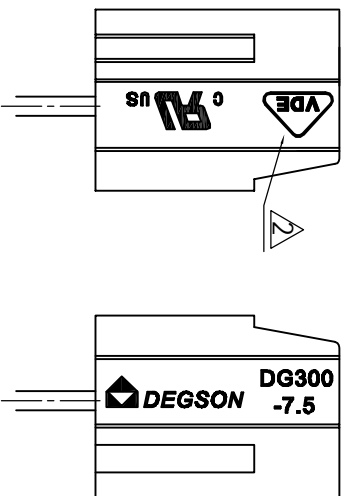
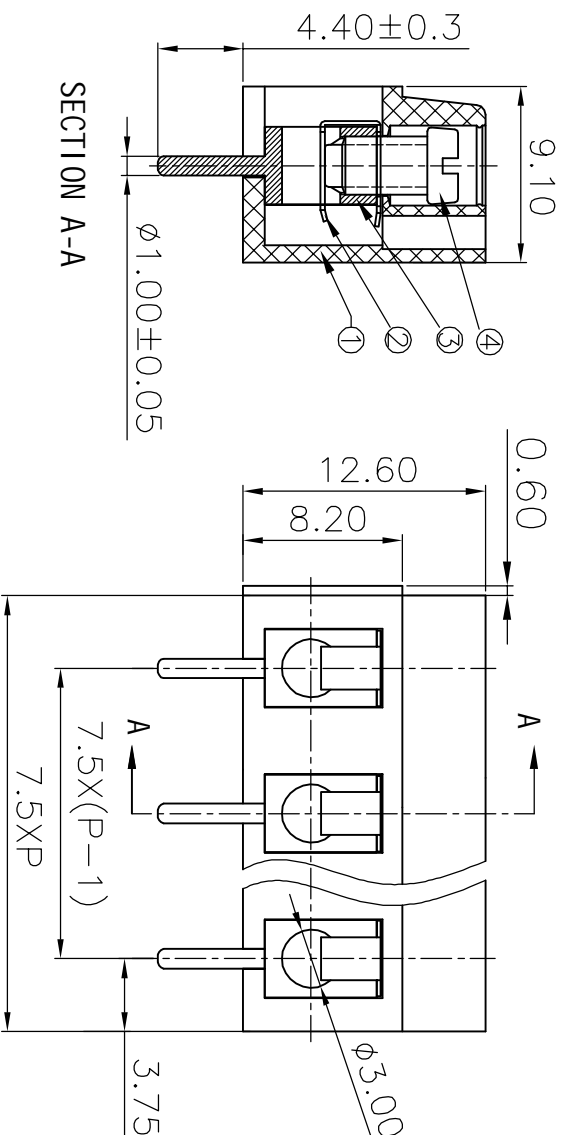


REVISION RECORD				
REV	ECO	DESCRIPTION	DRRT	DATE
△		Drawing Revise	Haoyh	03/16/08
△		增加VDE刻字	YeJ	11/29/07
△		更改公差表	LJH	12/24/07

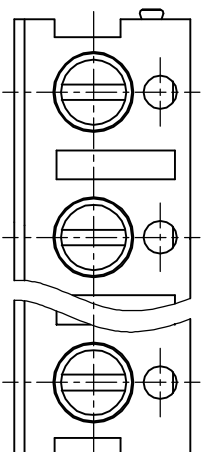

Notes:

1. Pitch: 7.5mm
2. Rated voltage/current: UL 300V/10A
VDE 250V/24A
3. Operation temperatures: -30°C~+120°C
4. Withstanding Voltage: AC2000V/1min
5. Insulation Resistance: 5000MΩ/DC1000V
6. Wire Range: 22~14AWG, 2.5mm²
7. Max. Torque Value: 5.10kgf.cm
8. Undimensioned Tolerances:

Pitch range in mm	Nominal dimension range in mm					
	over 6	over 10	over 30	over 60	over 100	over 150
to 6	to 10	to 24	to 60	to 100	to 150	▽
±0.10	±0.15	±0.25	±0.2±0.3	±0.5±0.7	±1.0±0.005/10	

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
4	DG300 Screws	S000001380(H)	XX	Steel	Cr ³⁺ Zn
3	DG300(A) Pin header	4001B00010(H)	XX	Brass	Snce
2	DG300 Spring	X000000230(H)	XX	Stainless Steel	
1	DG300-7.5-Housing	4001A0YXXA(H)	1	PBT	UL94V-0

DETACHED LISTS	
MM	0 ±
	.00 ±
	.000 ±
ANGLES ± 1°	±
THIRD ANGLE PROJECTION	SCALE : 1:1

DEGSON		DEGSON ELECTRONICS CO., LTD	
NAME	DG300-7.5-XXP-1Y-00A(H)	DRAWING NO.	DG300-7.5-E02
FINISH		REV	T3
SCALE	1:1	REV	12/26/07
SHEET	1	OF	1

8 7 6 5 4 3 2 1