
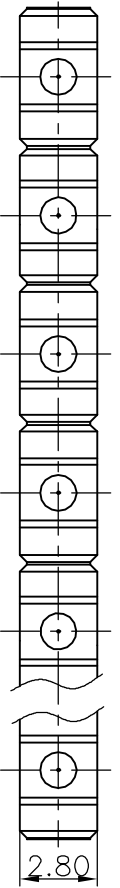
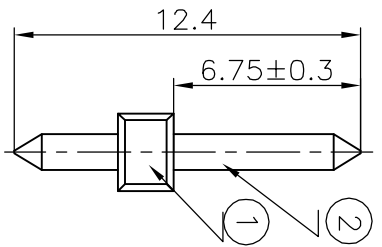


REVISION RECORD			
REV	ECOL	DESCRIPTION	DRFT DATE
A		PA66+25%GF代替原PBT料	10/05/10/11

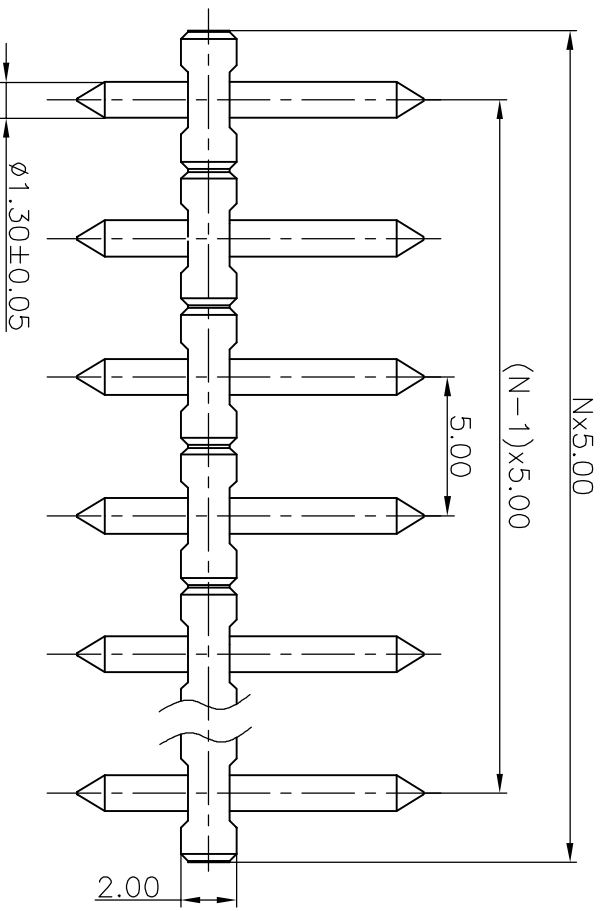

Material  
 Pin header: Brass, Tin plated  
 Housing: PA66+25%GF, UL94V-0  
 Electrical  
 Rated voltage: 300V  
 Rated current: 10A  
 Contact resistance: 20mΩ  
 Insulation resistance: 5000MΩ/1000V  
 Withstanding voltage: AC1500V/1min  
 Mechanical  
 Temp. Range: -40° C~+105° C  
 MAX Soldering: +250° C, for 5 Sec

Undimensioned Tolerances:

Pitch range in mm	Nominal dimension range in mm	
over 6	over 10	over 6
to 10	to 30	to 90
to 10	to 24	to 30
to 10	to 24	to 90
to 10	to 24	to 200
to 10	to 15	to 0.1±0.2±0.3±0.5±0.7±0.05/n0

2	DG332-Pin header	4014B00010(H)	XX	Brass	Tin plated
1	DG332J-5.0-XXP-1Y-00A-Hbusing014A0VXXA (H)		1	PA66	UL94V-0

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES

DETSO HgdyH	DATE	05/12/05
CHKD	DATE	
MFO	DATE	
APPL	DATE	

NAME: **DEGSON** 宁波德正电子有限公司  
 DEGSON ELECTRONICS CO., LTD

NAME: DG332J-5.0-XXP-1Y-00A(H)

DRAWING NO. DG332J-5.0-E05

FINISH: /PART NO.

SCALE: 1:1

THIRD ANGLE PROJECTION

DETACHED LISTS

ANGLES ± 1°

TOLERANCES EXCEPT AS NOTED

MM

0 ±

0.00 ±

0.00 ±

0.00 ±

0.00 ±

0.00 ±