


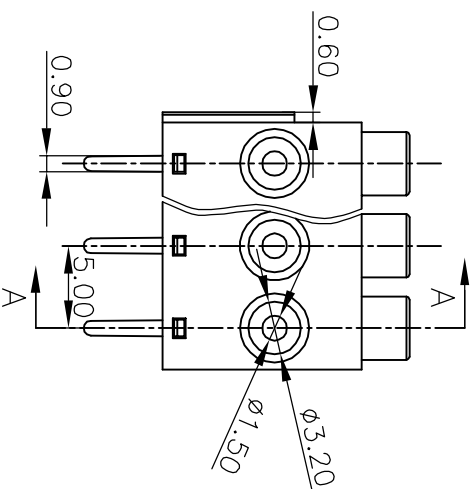



REVISION RECORD			
REV	ECO	DESCRIPTION	DATE
1		料号由300640Y01A变更为300640YXXA(H)	2/15/06*
2		增加区分两线三线的标注	03/15/06*
3		料号由300640Y010变更为300640Y01A	12/21/06*



Notes:

1. Pitch: 5.0MM;
2. Rated current: 8A;
3. Rated voltage: 300V;
4. Operation temperatures: -30° C~+120° C;
5. Withstanding Voltage: AC1500V/1Min;
6. Insulation resistance: 5000MΩ/1000V;
7. Wire range: 22-18AWG, 1.0mm²;
8. Undimensioned Tolerances:

三线塑件中间有筋，
两线塑件没有。

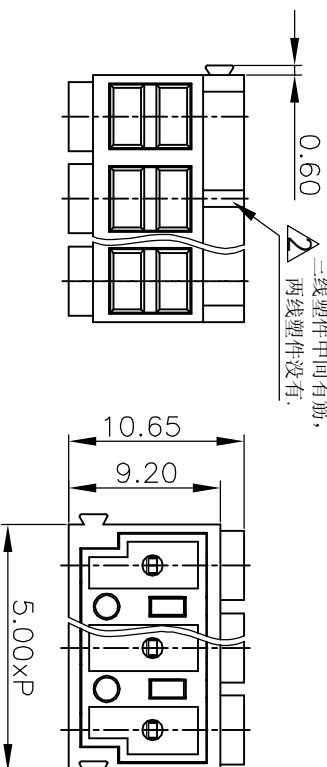

Pitch range in mm	Normal dimension range in mm
over 6 to 10	over 6 to 30
over 10 to 24	over 30 to 90
over 24 to 6	over 90 to 200
over 6 to 10	over 200 to 480
±0.10	±0.25
±0.15	±0.1
±0.25	±0.3
±0.5	±0.5
±0.7	±0.5
±0.05/It0	±0.05/It0

Item	Part Name	Material	Finish
5	DG390-5.0-Clamp	Stainless Steel	
4	DG390-5.0-Pin header	Brass	
3	DG390-5.0-Button	PC	

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
2	DG390 Cover	3006C0YXXA(H)	1	PBT	UL94V-0
1	DG390 Housing	300640YXXA(H)	1	PBT	UL94V-0

DETACHED LISTS	
MM	0 ±
MM	0.05 ±
MM	0.1 ±
MM	0.2 ±
MM	0.3 ±
MM	0.4 ±
MM	0.5 ±
MM	0.6 ±
MM	0.7 ±
MM	0.8 ±
MM	0.9 ±
MM	1.0 ±
MM	1.2 ±
MM	1.5 ±
MM	2.0 ±
MM	2.5 ±
MM	3.0 ±
MM	4.0 ±
MM	5.0 ±
MM	6.0 ±
MM	8.0 ±
MM	10 ±
MM	12 ±
MM	15 ±
MM	20 ±
MM	25 ±
MM	30 ±
MM	40 ±
MM	50 ±
MM	60 ±
MM	80 ±
MM	100 ±
MM	120 ±
MM	150 ±
MM	200 ±
MM	250 ±
MM	300 ±
MM	400 ±
MM	500 ±
MM	600 ±
MM	800 ±
MM	1000 ±