




Notes:

1. Pitch: 10mm, Poles: 2-24P
2. Rated current: 20A
3. Rated voltage: 300V
4. Operation temperatures: -40° C ~ +105° C
5. Insulation Withstand Voltage: AC2000V/1Min
6. Insulation Resistance: 500MΩ / DC500V
7. Wire Range: 22~12AWG
8. Max. Torque Value: 12.24kgf. cm
9. Undimensioned Tolerances:

Pitch range in mm	Nominal dimension range	
	in mm	in mm
6	over 10	over 30
10	to 10	to 90
15	to 15	to 135
20	to 20	to 180
25	to 25	to 225
30	to 30	to 270
35	to 35	to 315
40	to 40	to 360
45	to 45	to 405
50	to 50	to 450
55	to 55	to 495
60	to 60	to 540
65	to 65	to 585
70	to 70	to 630
75	to 75	to 675
80	to 80	to 720
85	to 85	to 765
90	to 90	to 810
95	to 95	to 855
100	to 100	to 900

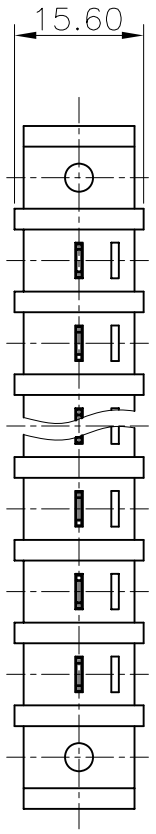

REVISION RECORD			
REV	ECO	DESCRIPTION	DRFT DATE
Δ		视图更新	HW 06/13/06*
Δ		增加U刻字	Yes 01/30/07*

ITEM 1	DEG55H-A Housing	5004M0YXXA(H)	1	PA66	UL94V-0
ITEM 2	DEG55H-A Housing	5004M0YXXA(H)	1	PA66	UL94V-0
ITEM 3	4*8 (7.5*7.5) bright Screw	S000000570(H)	XX	Steel	
ITEM 4	DG45H Pin header	5003B00040(H)	XX	Brass	
ITEM 5				Ni Plated	
ITEM 6				Sn Plated	

8 7 6 5 4 3 2 1

DETACHED LISTS
 TOLERANCES EXCEPT AS NOTED
 ANGLES ± 1°
 FINISH:
 SCALE: 1:1
 DO NOT SCALE DRAWING

DEGSON
 宁波高正电子有限公司
 DEGSON ELECTRONICS CO., LTD.

NAME
 DEG55H-A-XXP-1Y-00A(H)

DRAWING NO. DEG55H-E04
 /PART NO.
 SHEET 1 OF 1

SIZE
 A3
 REV
 12
 01/30/07*