
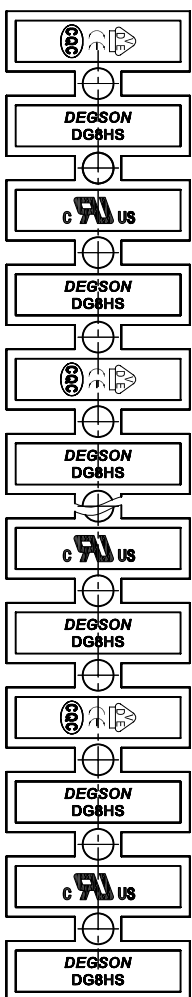
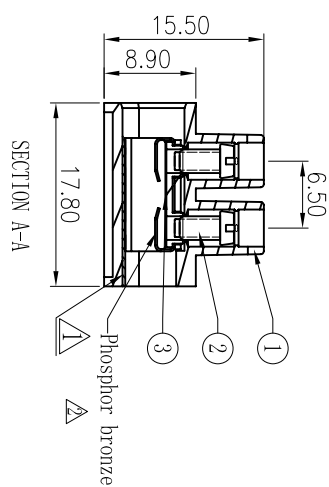


REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE
△		增加DG8HSWSP零件及结构变更	Zhangy 04/08/09*
△	09-0075	增加弹片材质备注	LJH 10/05/09*

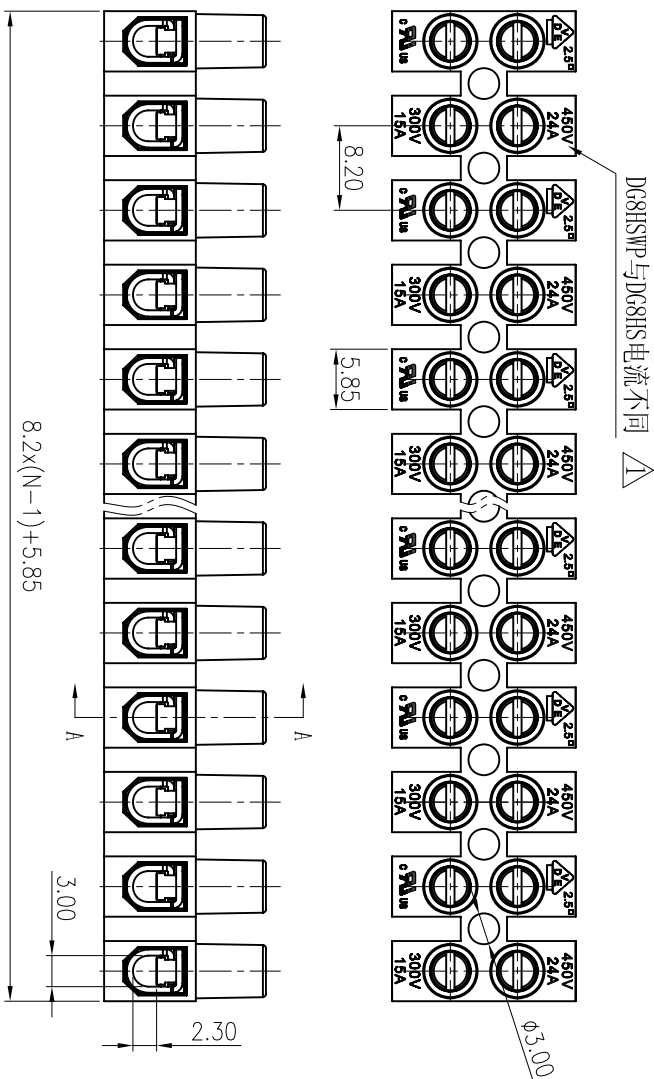

Notes:

1. Pitch: 8.2, Poles: 2-12P
2. Rated voltage/Current: UL1059 300V 15A
VDE 450V 24A
3. Operation temperatures: -40°C ~ +105°C
4. Withstanding Voltage: AC2500V/1Min
5. Insulation Resistance: 5000MΩ/DC1000V
6. Wier Range: 20-14AWG, 0.5-2.5mm²
7. Max. Torque Value: M2.5, 4.08kgf.cm
8. Undimensioned Tolerances:

ITEM		NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
3	DG8HS	Current carrier	X000003250 (H)	XX	Steel ⁺ Phosphor bronze	Cr ⁺ Zn
2	DG8H	"-" Screws M2.5	S000001110 (H)	XX*2	Steel	Cr ⁺ Zn
1	DG8HSWSP	Housing	204840YXXA (H)	1	PA66	UL94V-2

DETAILED LISTS	
MM	INCH
0 ±	±
0.00 ±	±
0.00 ±	±

DATE	CHKD	DATE	DATE
08/09/07*			

THIRD ANGLE PROJECTION	
SCALE: 1:1	SCALE: 1:1

NAME	
DEGSON	宁波高正电子有限公司
DEGSON	DEGSON ELECTRONICS CO., LTD

DRAWING NO.	SIZE	REV
DG8HSWSP-E01	A4	T2

DD NOT SCALE DRAWING	SHEET	OF
	1	1