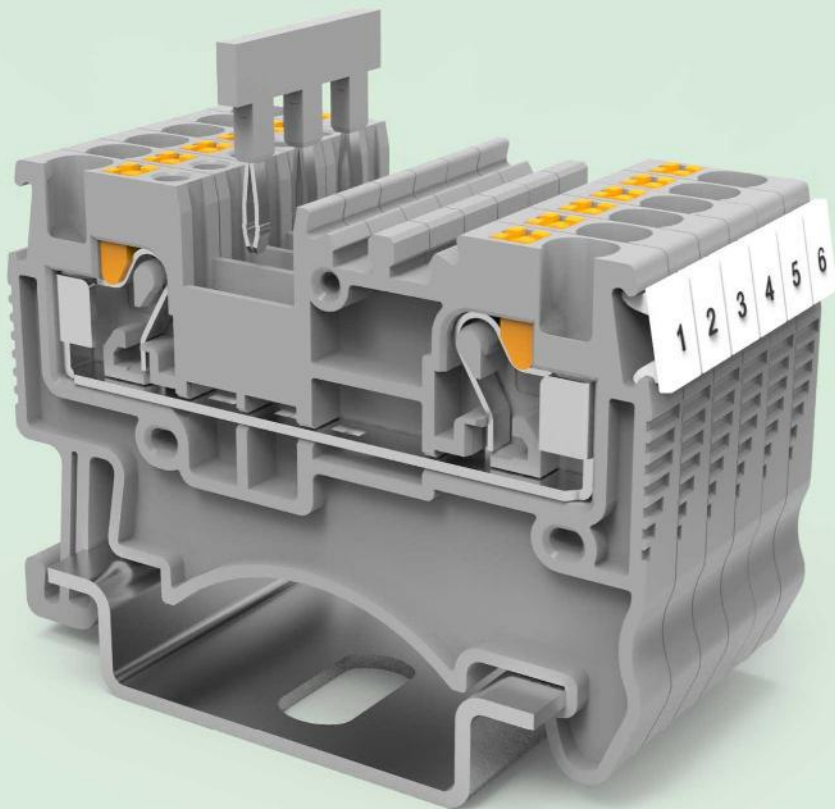
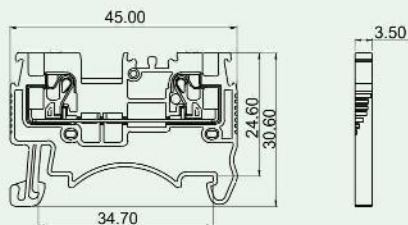



DS1.5


- Push-in 直插式连接技术，操作更快捷；
- 蝶型弹簧结构，抗振性能好；
- 插拔式桥接件方便、快捷、高效。
- 最大线径：1.5mm²。
- Push-in connection technology, fast operation;
- Push-in spring structure, excellent vibration resistance;
- Bridge accessory available, convenient, fast and high efficiency.
- Max. wire range : 1.5mm².


技术参数 Technical Data
APPROVAL: CE


型号 Model	线径 Wire range	线数 Poles	IEC60947技术参数(IEC60947datasheet)				UL1059技术参数(UL1059 datasheet)			
			电压(V)	Rated voltage	电流(A)	Rated current	电压(V)	Rated voltage	电流(A)	Rated current
DS1.5	0.2-1.5mm ² /26-14 AWG	01P	500		17.5		300		15	

应用行业 Application

工业自动化、机械、电梯、电力电气、轨道交通等行业。
 Industrial automation, machinery, elevator, electric power, Railway transportation etc.


产品包装方式 Packing

Product model	Pcs./Pkt.
DS1.5	15

附件 Accessory

型号对照 Cross Reference

DEGSON	同行1/ Competitor1	同行2/ Competitor2
DS1.5	PT1.5/S	2002-1201

产品订货 How to order

DS1.5	0	1	P	1	1	0	0	0	AH
Series No.	No. of Pole					Standard			
				1 Single pitch		通用色 General Color			
				2 Double pitch		1 Grey	PANTONE 430C	DEGSON	01