
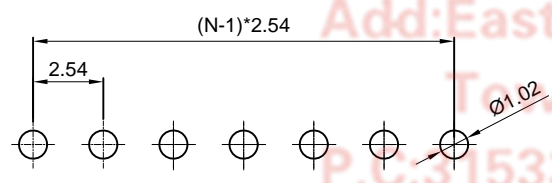


The information provided herein is from CONNFLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNFLY or its affiliates. Unauthorized use or reproduction of any part of this document, in any form or by any means, without the prior written permission of CONNFLY, is strictly prohibited. CONNFLY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 07/03/06'		LJC 07/03/06'
H	DRAWING UPDATE	JLZ 05/05/20'		

N=Number Of Contacts

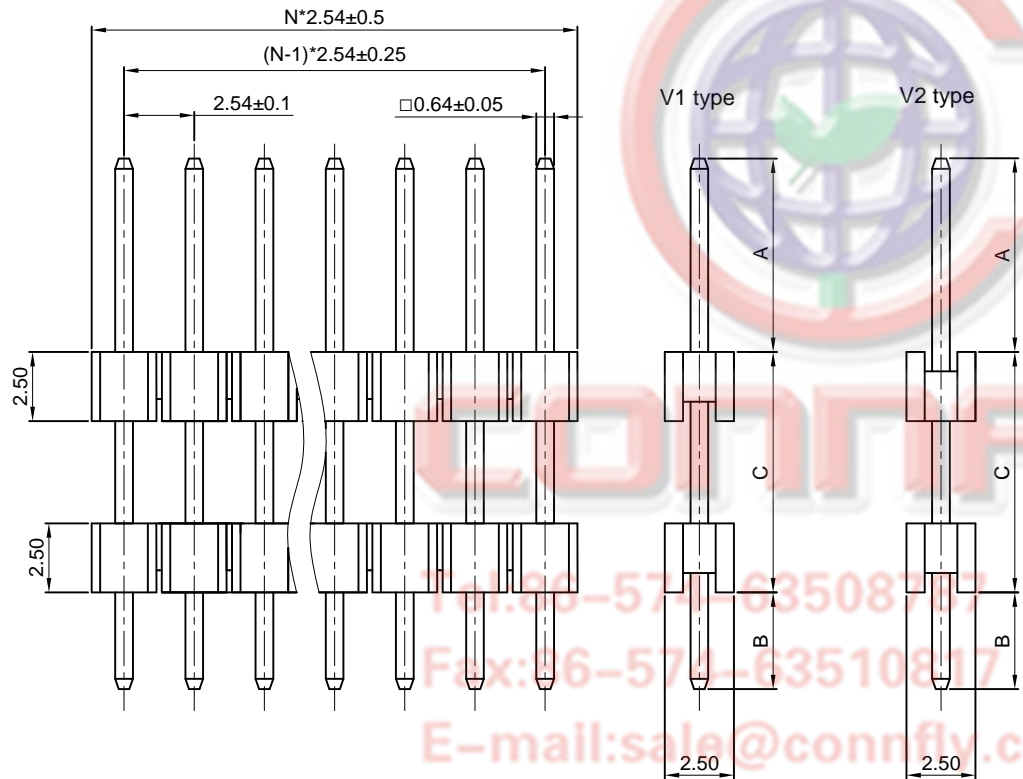

Recommend PCB Layout
(Tolerance=±0.05)

Notes:

- Electrical Characteristics:
 - Contact Resistance: 20mΩ Max.
 - Dielectric Withstanding Voltage: 600V AC(rms) For 1 Minute.
 - Insulation Resistance: 1000MΩ Min.
 - Current Rating:3A.
- Environment Characteristics:
 - Temperature: -40°C~+105°C.
- Materials:
 - Contact Material: Copper Alloy.
 - Contact Plating: Gold Plating Over Nickel.
 - Insulator Materials: PBT,Black,UL94-V0.
- Product Number Code:

DS1029-01 - X X X X X X X - X

- Plating Level(For Gold Only)
- 3A: Level 3A B: Level B
- N: Level N
- Dim. A B C Type
- 1: Type 1
- 2: Type 2
- or -A*.-B*.-C**
- Bend type
- A: V1 type
- B: V2 type
- Mounting type
- V: V/T type
- Housing color
- B: Black
- Contact Plating
- 8: Full Gold Flash
- 6: Full Tin
- Connector type
- P: Plug
- No. Of Contacts
- 1x1-1x40

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 2
DRAWING NO.	C-DS1029-01-XXXXXX-X-H		

PROJECTION		TITLE
UNITS	mm	2.54mm Pin Header V/T Type Single Row Board Spacers Type
SHEET SIZE	A4	SERIES DS1029-01 SERIES

晨翔电子有限公司
 CONNFLY CONNFLY ELECTRONIC CO. LTD

