
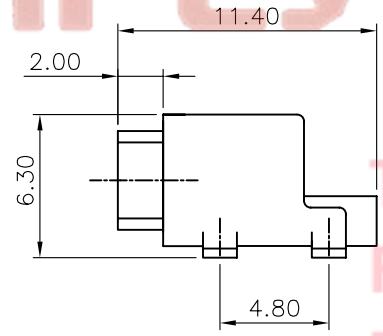
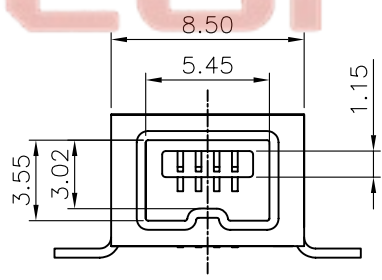


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 05/09/05'		

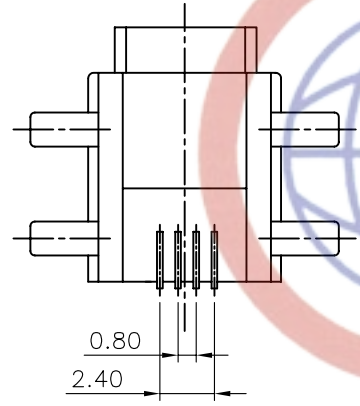

NOTES:

- SPECIFICATIONS
  - Contact Resistance: 50mΩ max
  - Insulator Resistance: 100MΩ min.
  - Current Rating: 0.5A per pin max.
  - Rated Voltage: 30V DC
  - Dielectric withstanding voltage: AC 100V For 1 minute
  - Contact: Copper Alloy
  - Housing: Thermoplastic(UL 94V-0)

2. PRODUCT NUMBER CODE:

DS1112 - X X X

- Contact plating
  - 0: Selective gold flash
  - C: Selective 3u" gold
- Shell plating
  - N: Nickel
  - 6: Tin
- Color of housing
  - B: Black

Tel:86-574-63508787  
 Fax:86-574-63510817  
 E-mail:sale@zhenqin.com.cn  
 Http://www.connfly.com

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE
X.	±0.60	X.	±5°	UNITS	mm	MINI 1394 4PIN FEMALE SMT type
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES DS1112 SERIES
.XX	±0.25	.XX	±2°			
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 <b>CONNFLY CONNFLY ELECTRONIC CO. LTD</b>		
SCALE		1:1	SHEET 1 OF 1			
DRAWING NO.		C-DS1112-XXX				