

1 RoHS Compliant

2

3

4

5

6

7

8

A

B

C


D

E

F


G

H

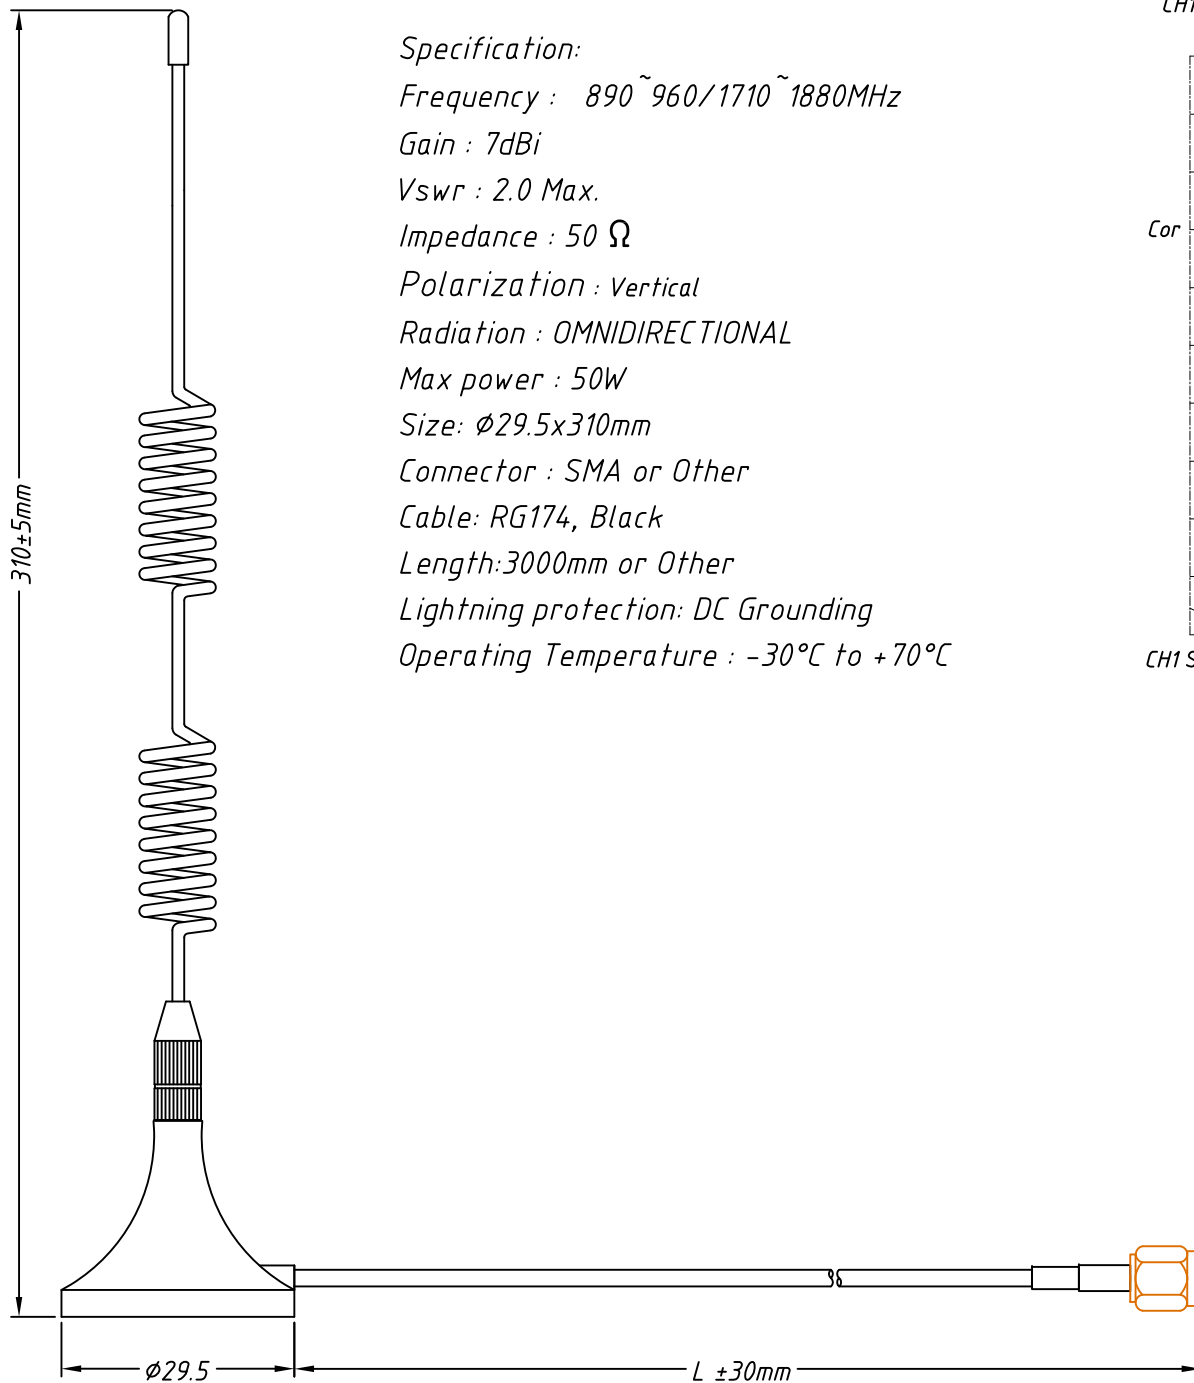

Specification:  
 Frequency : 890 ~ 960/1710 ~ 1880MHz  
 Gain : 7dBi  
 Vswr : 2.0 Max.  
 Impedance : 50 Ω  
 Polarization : Vertical  
 Radiation : OMNIDIRECTIONAL  
 Max power : 50W  
 Size: φ29.5x310mm  
 Connector : SMA or Other  
 Cable: RG174, Black  
 Length:3000mm or Other  
 Lightning protection: DC Grounding  
 Operating Temperature : -30°C to +70°C

CH1 A/R SWR MKR 1: 1.4252 U  
 REF 1.000 U 1.000U/ 890 000 000.Hz

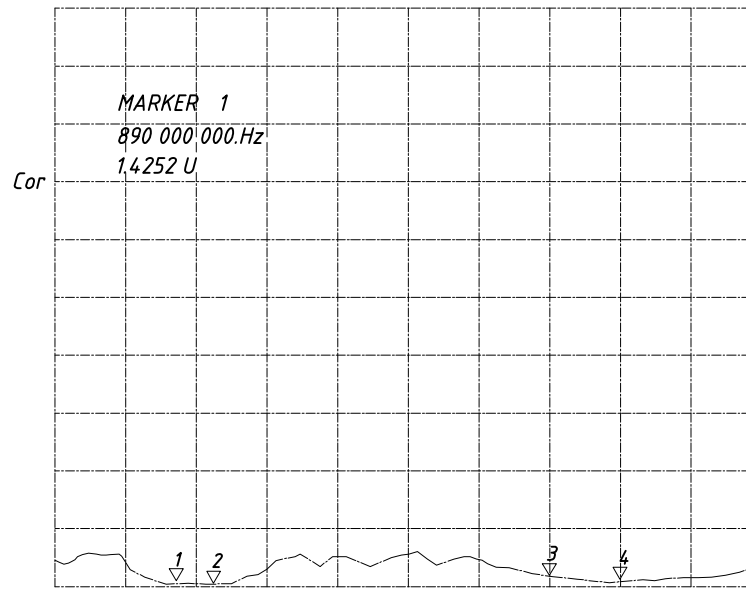

CH1 Start 600 000 000.Hz Stop 2 200 000 000.Hz

Order Information

L-KLS1- GSM17 010 310 3000  
 RoHS  
 Antenna Frequency : GSM: 890 ~ 960/1710 ~ 1880MHz  
 Con. Code: 010: Standard SMA Connector  
 Hight: 310- 310mm  
 3000: Cable Lenges

		Description:	
		GSM Antenna with Magnet	
PROJECTION		KLS P/N:	L-KLS1-GSM17010XXXX
UNITS	mm		
SHEET SIZE	A4		
Draw:	Daniel 2019-07-29		NingBo KLS ELECTRONIC CO.,L TD.
Check:	Daniel 2019-07-29		

1

2

3

4

5

6

7

8

A

B

C

D

E

F

G

H