



# KBP3005 THRU KBP310

Reverse Voltage - 50 to 1000 Volts Forward Current - 3.0 Amperes

## SINGLE BRIDGE RECTIFIERS

### Features

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Glass passivated die construction
- ◆ Ideal for printed circuit boards
- ◆ Low reverse leakage
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed: 260°C/10 seconds

### Mechanical Data


**Case :** JEDEC KBP Molded plastic body

**Terminals :** Solder plated, solderable per MIL-STD-750, Method 2026

**Polarity :** Polarity symbol marking on body

**Mounting Position :** Any

**Weight :** 0.050 ounce, 1.52 grams

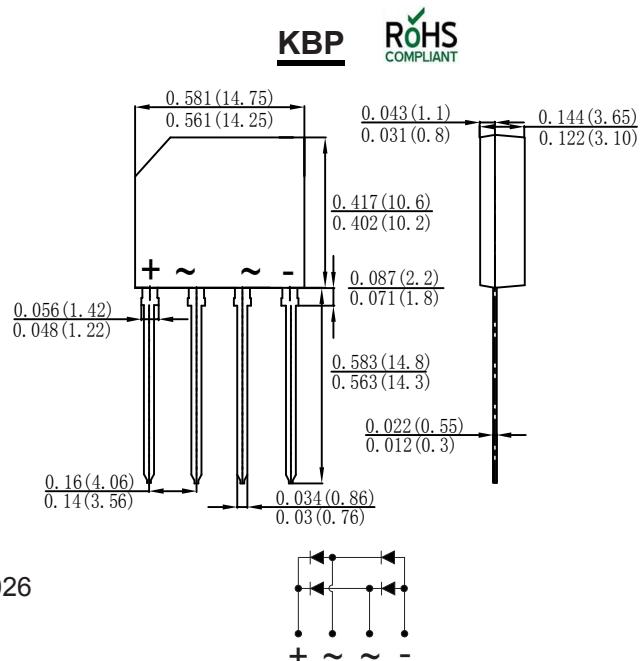

Dimensions in inches and (millimeters)

### Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Parameter	SYMBOLS	MDD KBP3005	MDD KBP301	MDD KBP302	MDD KBP304	MDD KBP307	MDD KBP308	MDD KBP310	UNITS
Marking Code									
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	V
Maximum average forward output rectified current at T <sub>c</sub> =100°C	I <sub>(AV)</sub>					3.0			A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>					55			A
Maximum instantaneous forward voltage drop per bridge element at 3.0A	V <sub>F</sub>				1.1				V
Maximum DC reverse current T <sub>A</sub> =25°C at rated DC blocking voltage T <sub>A</sub> =125°C	I <sub>R</sub>				5.0				µA
					0.5				mA
I <sup>2</sup> t Rating for fusing (3ms≤t≤8.3ms)	I <sup>2</sup> t				12.5				A <sup>2</sup> S
Typical Junction Capacitance per element (Note 1)	C <sub>j</sub>				40				pF
Typical Thermal Resistance (Note 2)	R <sub>θJA</sub> R <sub>θJC</sub> R <sub>θJL</sub>				40				°C/W
Operating junction temperature range	T <sub>J</sub>				-55 to +150				°C
Storage temperature range	T <sub>STG</sub>				-55 to +150				°C

Note: (1) Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

(2) Thermal Resistance Junction to Case, Lead and Ambient.



# KBP3005 THRU KBP310

Reverse Voltage - 50 to 1000 Volts Forward Current - 3.0 Amperes

## Ratings And Characteristic Curves

Fig.1 Forward Current Derating Curve

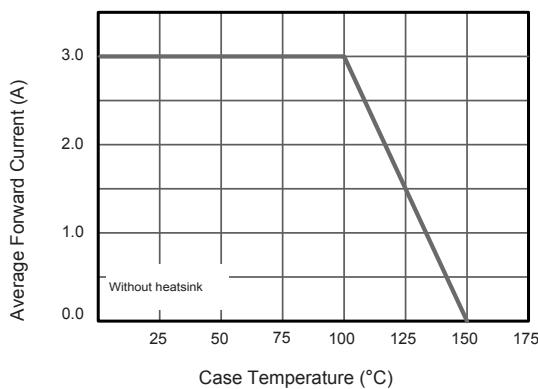


Fig.2 Typical Instantaneous Reverse Characteristics

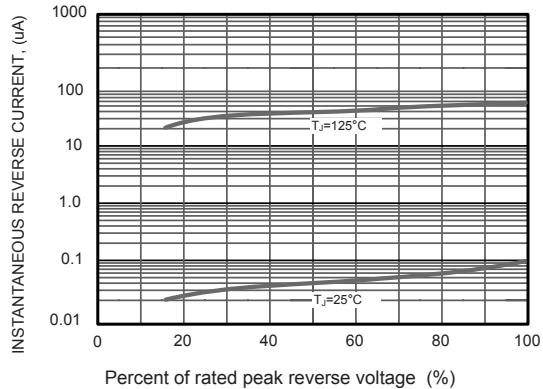


Fig.3 Typical Forward Characteristic

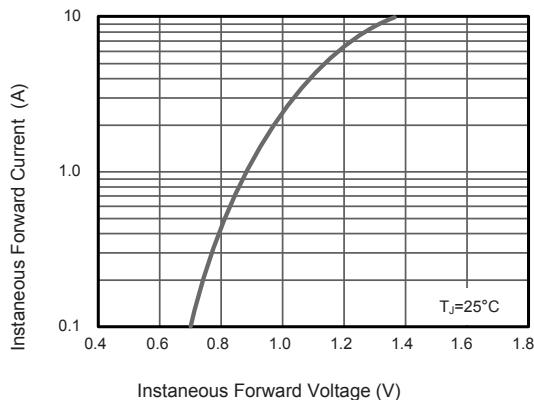


Fig.4 Typical Junction Capacitance

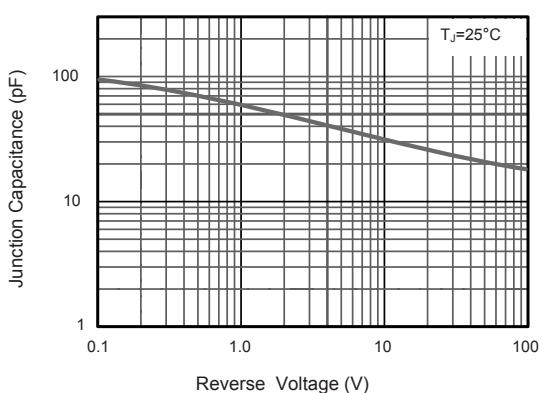


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current


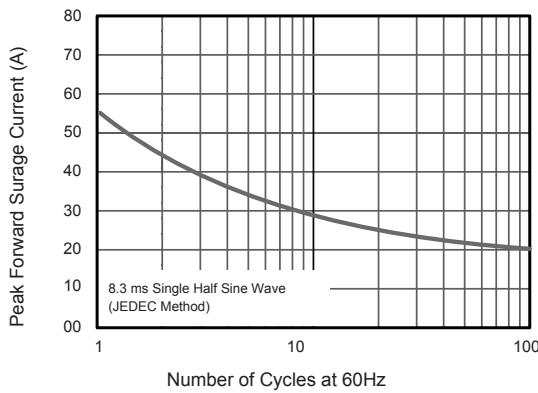


Fig.6- Typical Transient Thermal Impedance

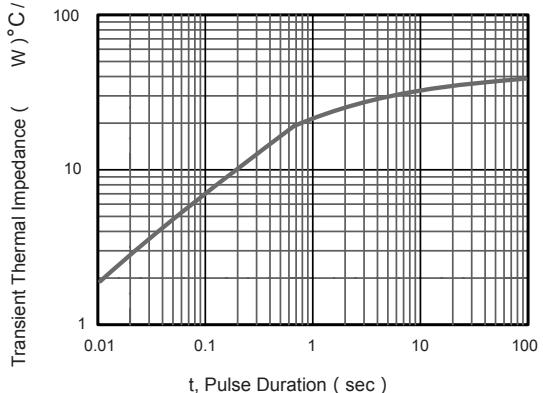

The curve above is for reference only.