

Circular Connector

Russia Standard PC Type

KLS15-RCS01-PC4 type small connector

KLS15-RCS01-PC series are used widely in all kinds of electronic equipment. This connect is small in size and light in weight. The flange are round and square.


Technical characteristics

Operating voltage:250V
Rated current:5A
Contact Resistance :<5MΩ
Insulation resistance:<3000MΩ
Temperature: -55°C~+125°C
Relative Humidity: 93% at 40±2°C
Atmospheric pressure: 101.33~6.7kpa
Vibration, the peak impact acceleration: 10~2000Hz 196m / s²
Mechanical shock, the peak impact acceleration: 196m / s²
Endurance :500cycles
Water proof: IP≥68
The connect is water-repellent in one meter deep water for 30 minutes



XV

Structure of Insulator

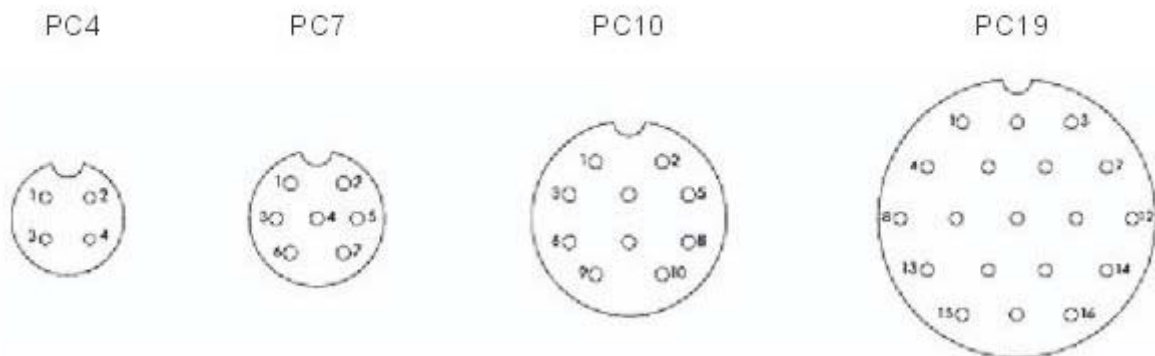

ORDER INFORMATION

Product NO.: KLS15-RCS01-PC4 **T B**

Pins: 4,7,10,19pin

Type: T-Plug (Female+Cover)
B-Flange Receptacle
F- Female Plug
C-Cover



T-Plug (Female+Cover)



B-Flange Receptacle



C-Cover

Circular Connector




Russia Standard PC Type


KLS15-RCS01-PC4 type small connector

Dimension: (mm)


PC4-T/B

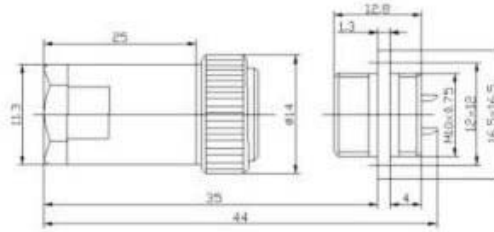


PC7-T/B

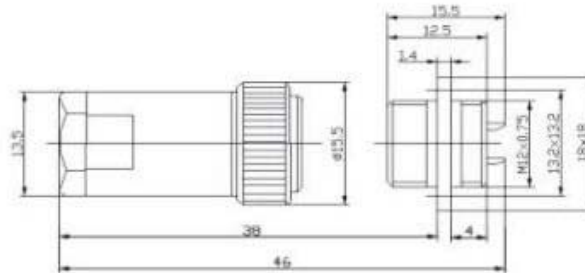

PC10-T/B

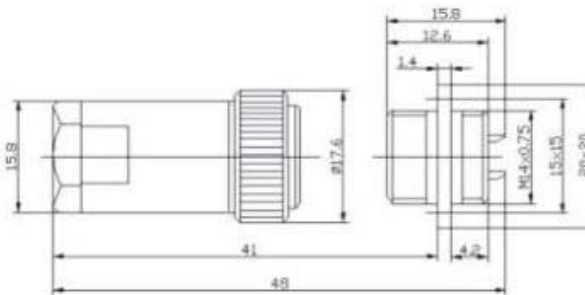

PC19-T/B

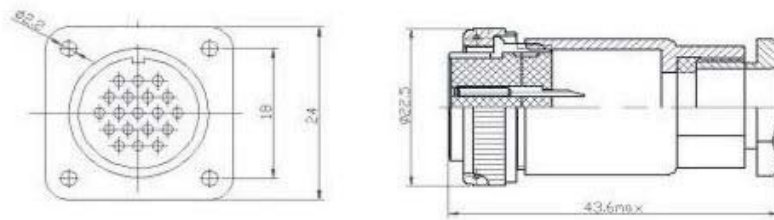

ORDER INFORMATION

Product NO.: KLS15-RCS01-PC4 **T** **B**

Pins: 4,7,10,19pin

Type: T-Plug (Female+Cover)
B-Flange Receptacle
F- Female Plug
C-Cover



T-Plug (Female+Cover)



B-Flange Receptacle



C-Cover