

Rotary switches * Coding switches

KLS7-SR26

ELECTRICAL:

Switching Rating: 2.5A 125V AC; 350mA 125V DC
 Non-Switching Rating: 5A
 Operation Force: 400gf
 Dielectric Strength: 1000V RMS MIN.@ SEA LEVEL
 Insulation Resistance: 1000 MΩ Mim
 Operating Temperature: -30oC ~ +85oC
 Electrical Life: 15,000 Cycles

Model to choose : SR26A / SR26B / SR26A4 SR26B4

SR26A


Outline Drawing

SR26B

轴端安装尺寸
The fitting size of shaft end


线路板开孔尺寸
The tapping size of circuit board

ORDER INFORMATION

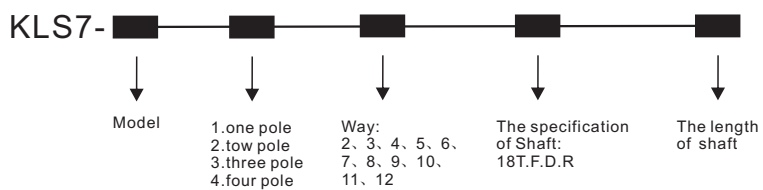


Switch

Rotary switches* Coding switches

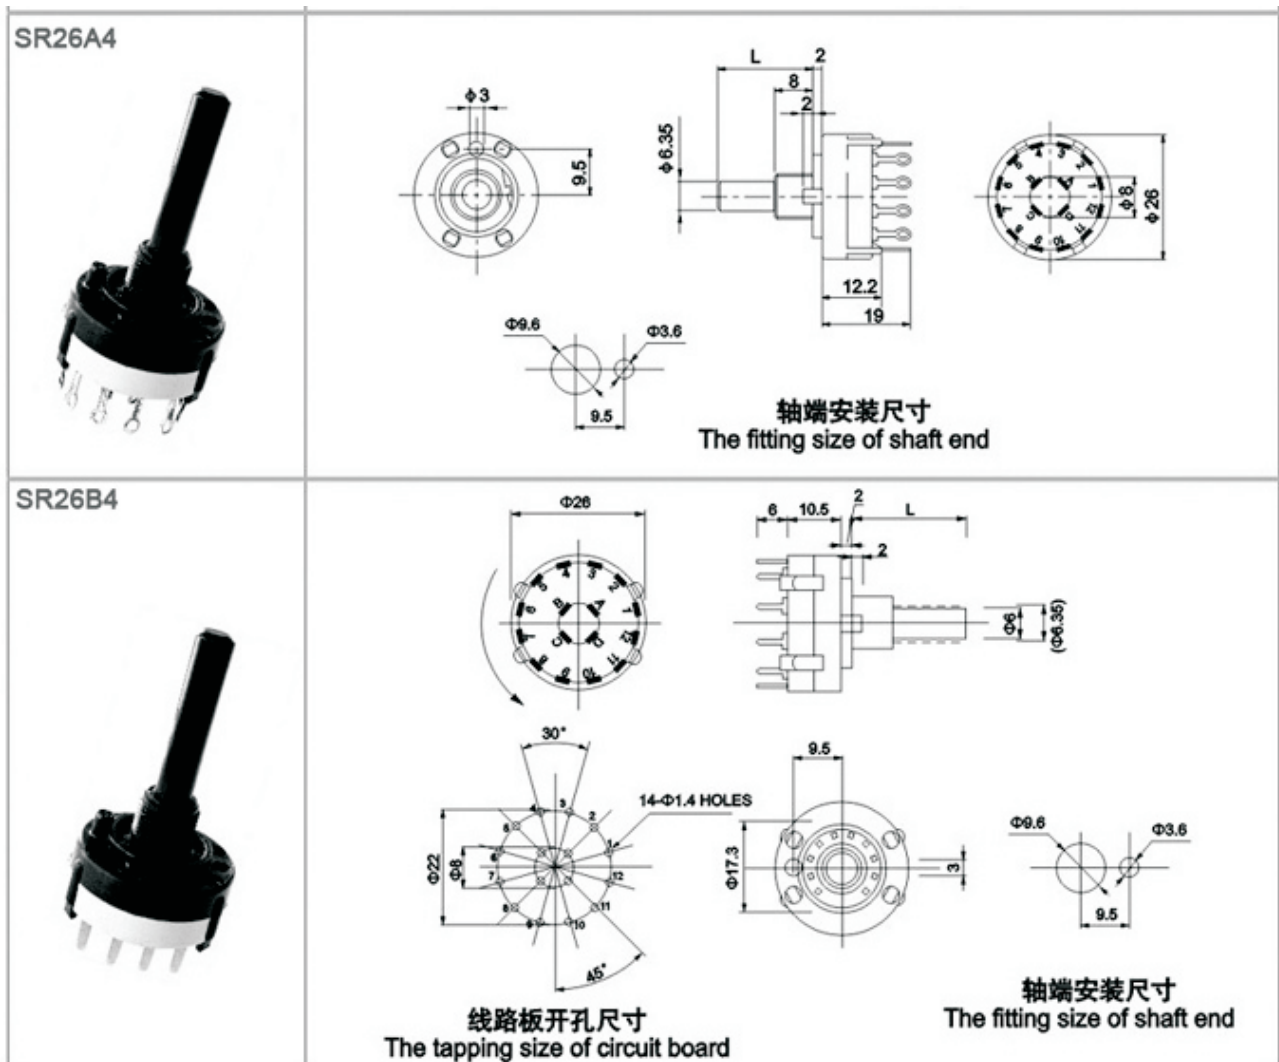

ORDER INFORMATION

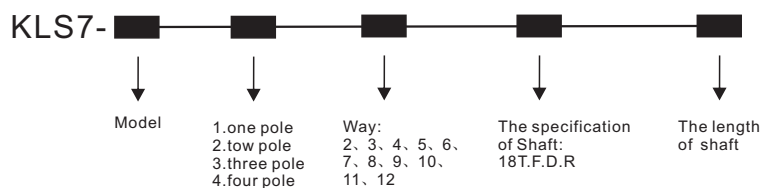

Rotary switches * Coding switches

Shaft to choose : 18T / F / D / R

18T		L	15	20	25			
		L1	7	7	7			
		L2	8	13	18			
F		L	15	20	25			
		L1	7	7	7			
		F	8	13	18			
D		L	15	18	21	25	29	38
		L1	7	7	7	7	7	7
		F	8	11	14	18	21	31
R		L	15	18	21	25	29	38
		L1	7	7	7	7	7	7
		L2	8	11	14	18	21	31

ORDER INFORMATION

