

插拔次数 ≥ 1000次



直插接线



阻燃底座



适用35mm国际导轨


型号说明/选型, 写法举例: LBJ13A-11/MZ2

对应编号	LB 1	J 2	● 3	A 4	—	● 5	/	● 6	● 7
1	LB	LANBOO 蓝波代码							
2	组类代号	J-继电器							
3	继电器厚度	13A(宽13mm)							
4	系列号	A—系列顺序号							
5	触点类型	11-1NO1NC、22-2NO2NC							
6	继电器模组	MZ—模组							
7	模组位数	4-4组插座、 、24-24组插座; 常规: 4/6/8/12, 定制: 10、16、24							

性能参数

安装方式	配套插座、卡扣导轨式安装	
外观材料	底座	PA6+GF20(RoHS)灰色, V0级燃
	底板	PA6+GF20(RoHS)灰色, V0级燃
	边框	PA6+GF20(RoHS)灰色, V0级燃
	起拔挂钩	PC+ABS合金(RoHS), V1级阻燃
	接触片	高精磷铜C5191, 表面镀镍

	一组	二组
触点类型	1NO1NC	2NO2NC
接线形式	直插式卡簧接线, 使用0.5~1mm国标线	
卡簧拉力	≥50N	
插拔力	插座与继电器间:首次插入力≤75N首次拔出力≥40N	
插拔次数	≥1000次(插座与继电器之间的插拔次数)	
工作环境温度	-40°C~+80°C, 非真空状态、不结冰情况下	
工作环境湿度	35~85%RH	
贮存环境温度	包装完好情况下, -40°C~+55°C	
贮存环境湿度	包装完好情况下, 45~90%RH	
耐振性	XYZ三向, 60HZ, 振幅2mm, 10小时(每2小时观察记录)	
产品防跌落	外壳端直跌落1米, 3次, 能正常工作	
包装跌落	600mm高度连续跌落4次, 产品无损坏	
产品认证	CCC CE RoHS REACH (定制)	
质保	66个月	

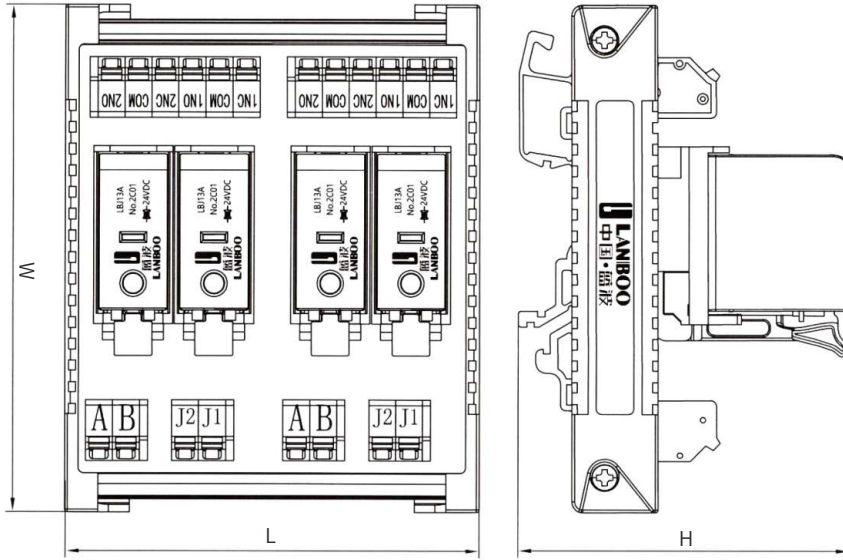

	4位	6位	8位	12位
长(L)	76.8	113.3	149.8	222.8
宽(W)	94	94	94	94
高(H)	61	61	61	61



中国·蓝波
LANBOO


蓝波大电流开关

Pioneer of High-Current Switches

CE RoHS Intertek ISO9001 多项专利

模组 规格书

J13A继电器适用

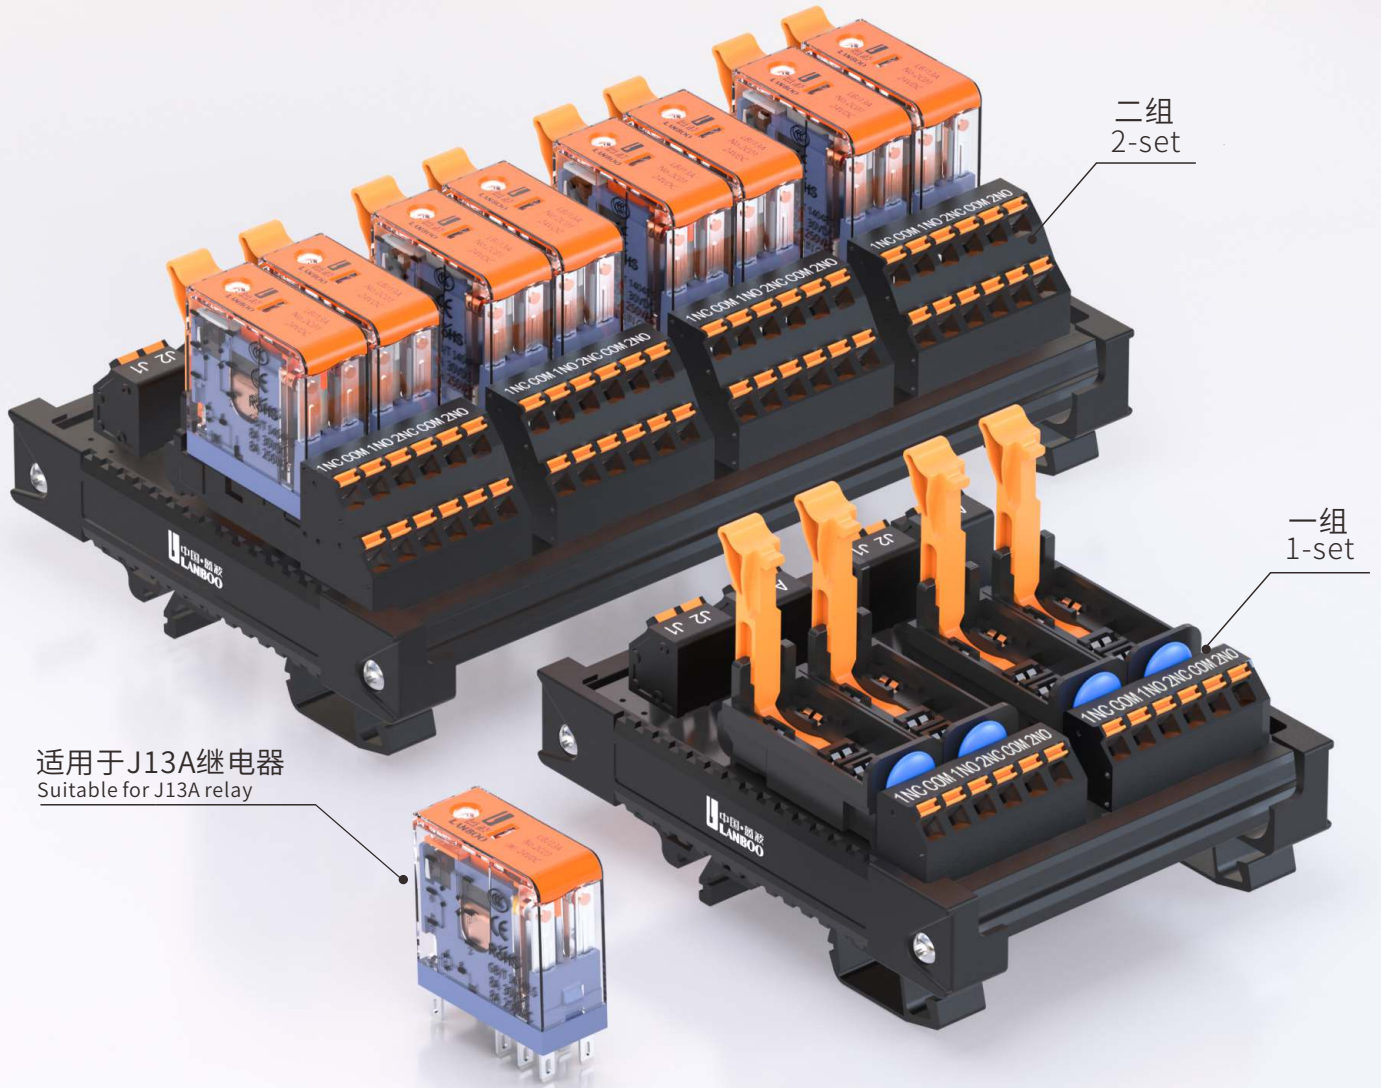

适用于J13A继电器
Suitable for J13A relay

二组
2-set

一组
1-set



Insertion and removal times \geq 1000 times



Plug-In



Flame retardant base



35mm


Model Description/Selection, Example: LBJ13A-11/MZ2

对应编号	LB	J	●	A	—	●	/	●	●	
	1	2	3	4		5		6	7	
1	LB	LANBOO								
2	Group code	J-relay								
3	Thickness	13A(13mm)								
4	Series No.	A								
5	Switch Combination	11-1NO1NC, 22-2NO2NC								
6	Relay module	MZ—module								
7	Number of module bits	4-4 ways、 、 24-24 ways; Routine: 4/6/8/12; Customized: 10、 16、 24								

The performance parameters

Installation method	Supporting socket and buckle rail installation		
Appearance materials	Relay module	Base	PA6+GF20(RoHS)grey,V0 level flame retardant
		Floor	PA6+GF20(RoHS)grey,V0 level flame retardant
		Frame	PA6+GF20(RoHS)grey,V0 level flame retardant
		Pull up hook	PC+ABS alloy (RoHS),V1 level flame retardant
		Contact piece	High precision phosphor copper C5191, surface nickel plating

	1-Set	2-Set
触点类型	1NO1NC	2NO2NC
接线形式	直插式卡簧接线, 使用0.5~1mm国标线	
卡簧拉力	≥50N	
插拔力	插座与继电器间:首次插入力≤75N首次拔出力≥40N	
插拔次数	≥1000次(插座与继电器之间的插拔次数)	
Ambient Temperature	-40°C~+80°C, in non vacuum and non icing conditions	
Working ambient humidity	35~85%RH	
Storage environment temperature	Under intact packaging, -40°C~+55°C	
Storage environment humidity	Under intact packaging, 45~90%RH	
Resistance to vibration	XYZ three way, 60Hz, amplitude 2mm, 10 hours (observe and record every 2 hours)	
Product drop prevention	The shell end falls vertically by 1 meter, 3 times, and can work normally	
Packaging drop	4 consecutive drops from a height of 600mm, with no damage to the product	
Product Certification	CCC CE RoHS REACH (customized)	
Quality Assurance	66 Months	

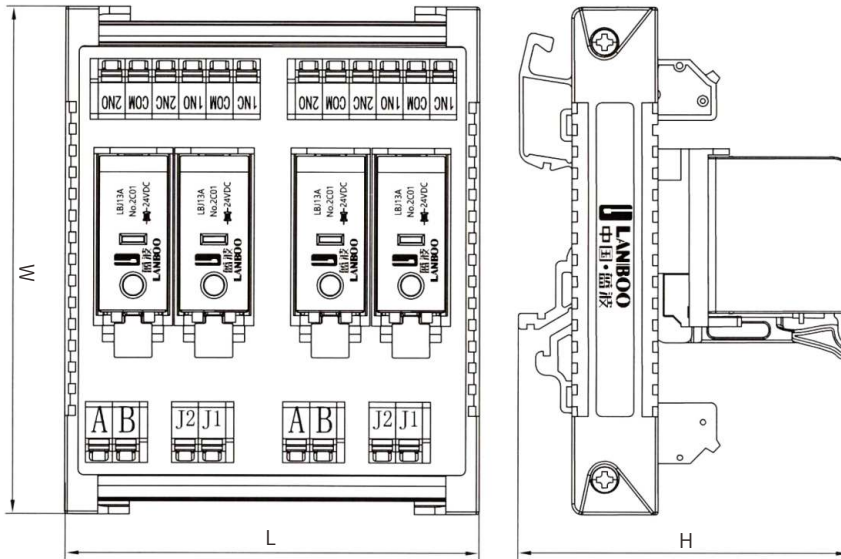

Way	4	6	8	12
Length(L)	76.8	113.3	149.8	222.8
Wide(W)	94	94	94	94
High(H)	61	61	61	61