


Circuit diagram

Model: LP603030		Overcharge Detection Voltage(V)	4.28±0.05
Min.Capacity 最低容量 (mAh) (0.2C,25±3°C) *Single cell capacity (单体电芯容量)		Overdischarge Detection Voltage(V)	3.0±0.1
Typical Capacity 典型容量 (mAh) (0.2C,25±3°C) *Single cell capacity (单体电芯容量)		过放保护电压 (V)	Limited to Max loading current 仅用于最大的负载电流
Nominal Voltage 标称电压 (V)		峰值 1.0 (A)	constant (A) 持续 0.5 (A)
Internal impedance 内阻 (≅) (mΩ,AC 1KHz)		客户要求最大的负载电流 peak value (A)	constant (A) 持续 (A)
Charge Temp. 充电温度 (°C)		If actual application loading current is bigger than EEMB suggested, please indicate. The application profile is important for an appropriate PCM design. (如实际应用的负载电流大于EEMB提供值, 请提出来, 实际的应用情况对PCM的设计至关重要)	
Discharge Temp. 放电温度 (°C)		Battery protection Related Value: (相关的电池保护值)	
Humidity(湿度)		Ambient Conditions (环境温度)	
Humidity(湿度)		Charge Temp. 充电温度 (°C)	
Humidity(湿度)		Discharge Temp. 放电温度 (°C)	
Humidity(湿度)		Humidity(湿度)	

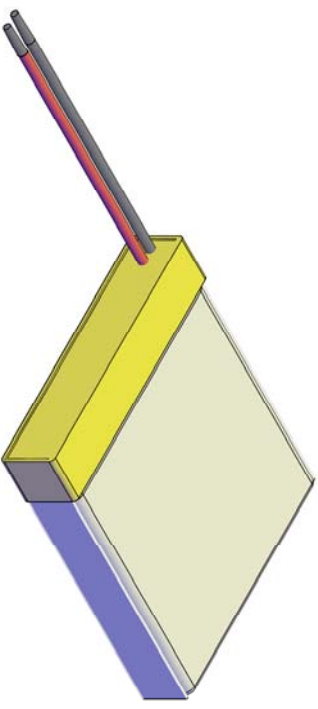

Remark(备注):
1. No scratch, discoloration, discoloration and leakage on the appearance of the cell(电池表面无划痕、变形、污点及漏液等现象).
2. Rohs compliant(严格按照ROHS要求生产).

Title		LP603030-PCM-LD	
File NO.		A08148	
EEMB BATTERY		EEMB BATTERY	
Drawn:	Lijeyong	Revise No.:	E4-2009
Checked 1:	Coco	Projection:	
Checked 2:		Page:	1/1
Approved:		Scale:	1.1 : 1
Draw Date:	2013/06/06	Unit:	mm