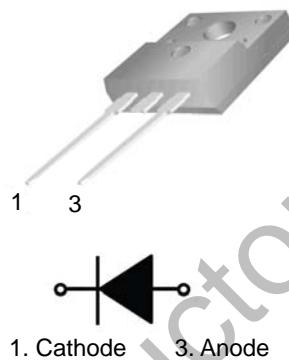


**MURF2005-MURF2060****Features:**

- High surge capacity
- Low Forward Voltage Drop.
- High Current Capability.
- Super Fast Switching Speed For High Efficiency

TO-220F -2L

**Absolute Maximum Ratings** ($T_a=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	MURF 2005	MURF 2010	MURF 2015	MURF 2020	MURF 2030	MURF 2040	MURF 2060	Unit
Maximum recurrent peak reverse voltage	V_{RRM}	50	100	150	200	300	400	600	V
Maximum RMS Voltage	V_{RMS}	35	70	105	140	210	280	420	V
Maximum DC Blocking Voltage	$V_{R(DC)}$	50	100	150	200	300	400	600	V
Average Rectified Forward Current Total Device, (Rated V_R),	$I_{F(AV)}$				20				A
Nonrepetitive Peak Surge Current(Surge applied at rated load conditions half wave, single phase, 60 Hz)	I_{FSM}				200				A
Operating Junction Temperature and Storage Temperature	T_J, T_{Stg}				-55 to +155				°C
Maximum Thermal Resistance, Junction-to-Case	$R_{\theta JC}$			3.0			2.0		°C/W

ELECTRICAL CHARACTERISTICS

Parameter	Symbol	MURF 2005	MURF 2010	MURF 2015	MURF 2020	MURF 2030	MURF 2040	MURF 2060	Unit
Forward Voltage ($I_F = 20\text{ A}, T_C = 25^\circ\text{C}$) (Note 1) ($I_F = 20\text{ A}, T_C = 150^\circ\text{C}$)	V_F		0.975			1.30		1.50	V
0.895					1.00		1.20		
Maximum Instantaneous Reverse Current (Note 1) (Rated DC Voltage, $T_C = 25^\circ\text{C}$) (Rated DC Voltage, $T_C = 150^\circ\text{C}$)	I_R		5		10			μA	
			250		500				
Maximum Reverse Recovery Time ($I_F = 1.0\text{ A}, dI/dt = 50\text{ A}/\mu\text{s}$) ($I_F = 0.5\text{ A}, I_R = 1.0\text{ A}, I_{REC} = 0.25\text{ A}$)	T_{RR}			35					ns
				25					

Note 1.Pulse Test: Pulse Width = 300 μs , Duty Cycle $\leq 2.0\%$

Typical Characteristics






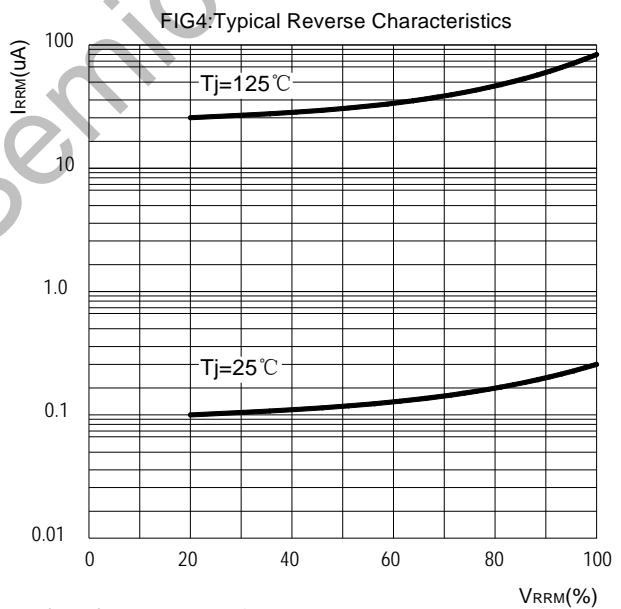


Diagram of circuit and Testing wave form of reverse recovery time

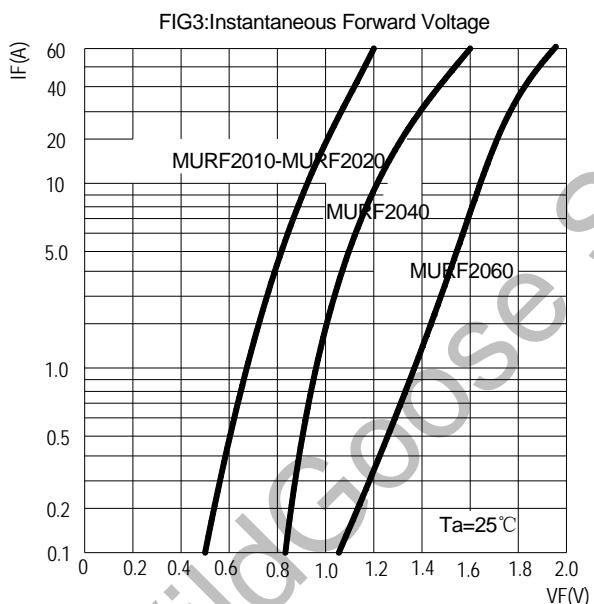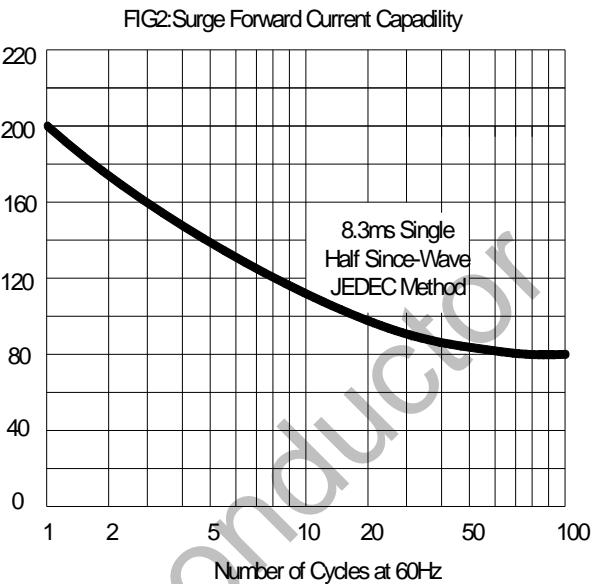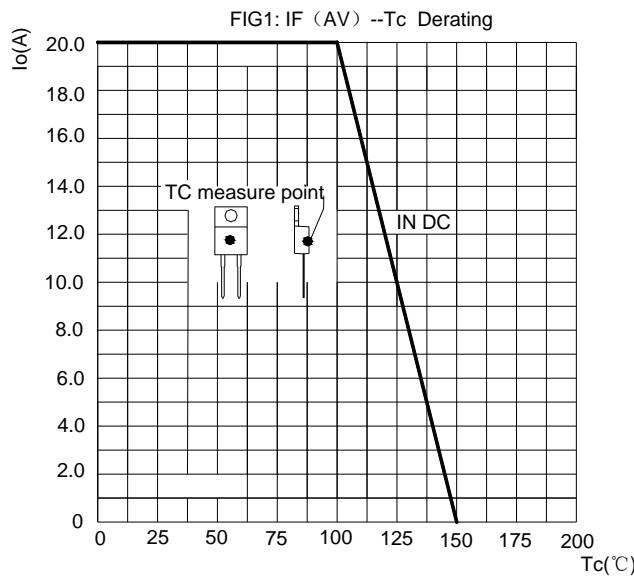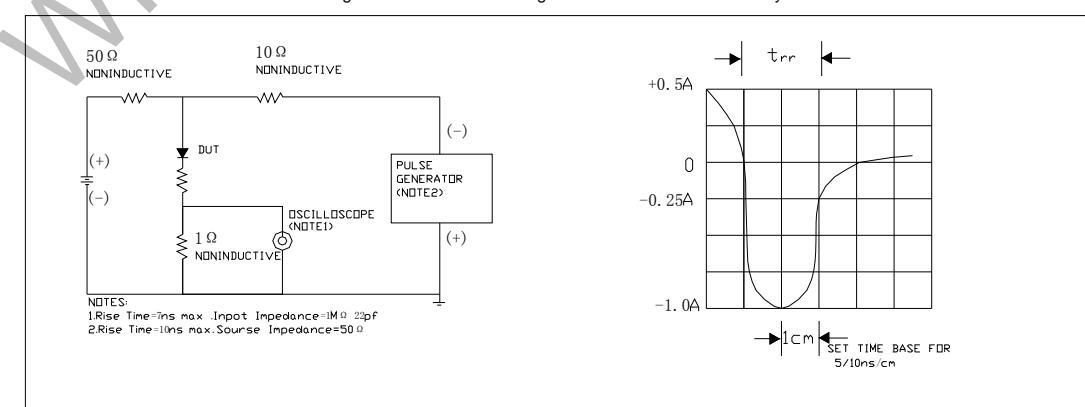

Package Dimension

TO-220F -2L

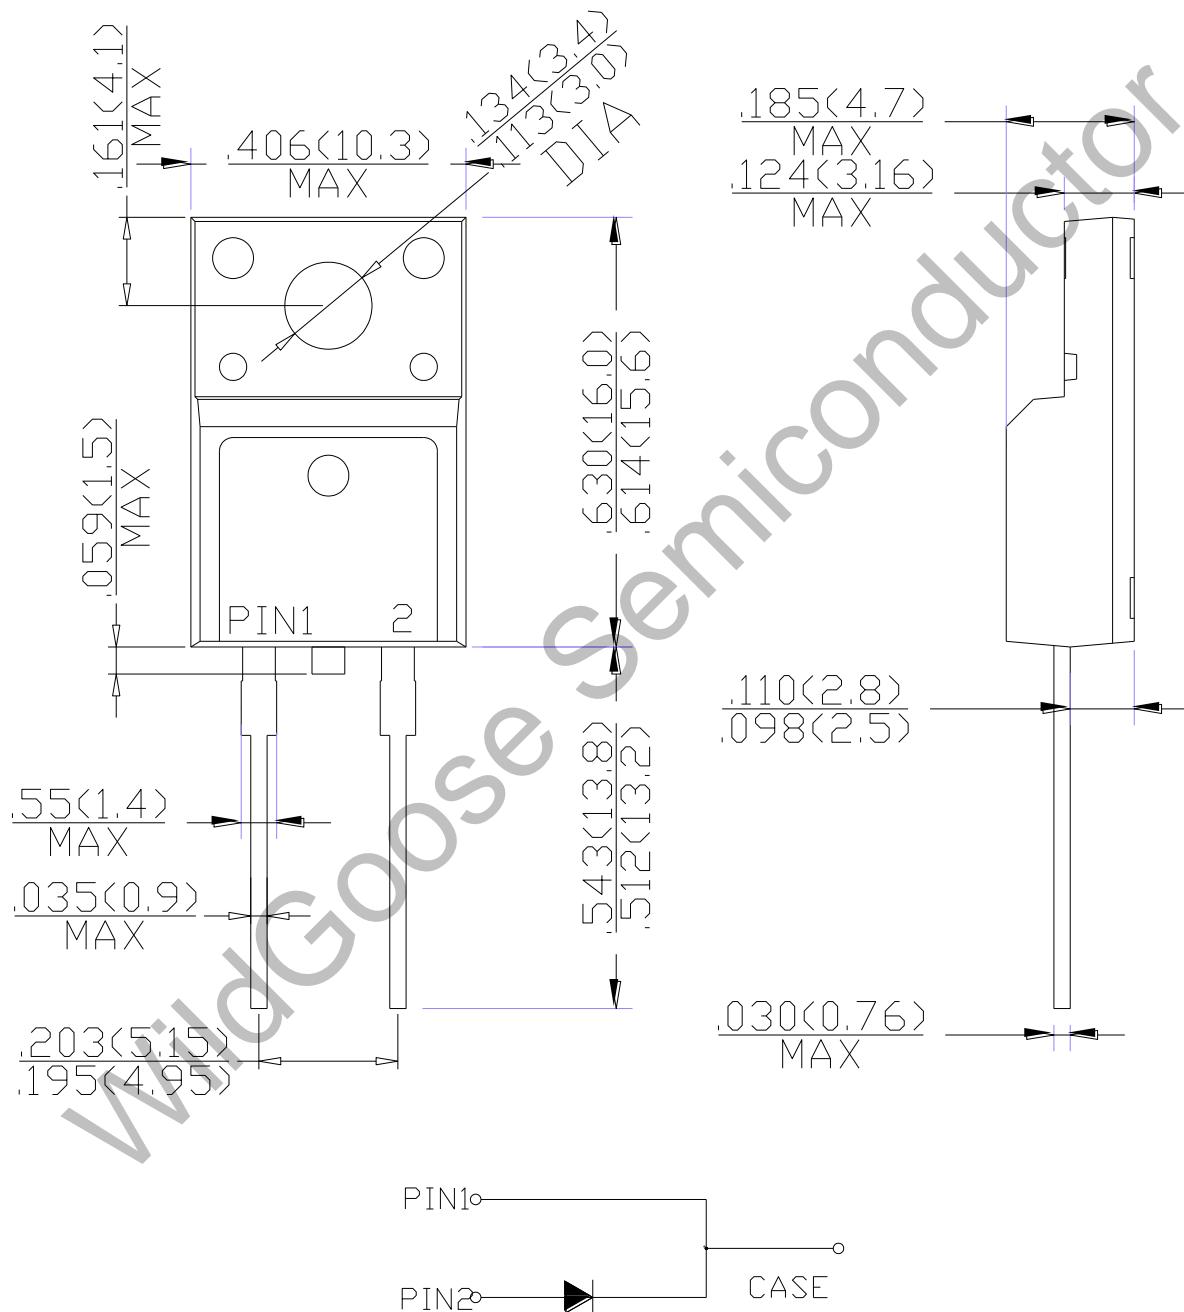

Dimensions in inches and (millimeters)