

SIM card Connector Series

L-KLS1-SIM-066-(6+1)P-H1.37-R NANO SIM PUSH/PUSH 1.35H WITH CD PIN



MATERIAL:



Insulator: High Temperature Thermoplastic, UJL 94V-0,
Contact: Copper Alloy
SHELL: SUS

PLATING:

Contact: Plated 30u'' Ni Overall Contact Au 1u''
Shell: Plated 50u'' Ni Overall, PAD Au 1u''

Electrical:

Current Rating :0.5mA AC/DC max.
Voltage Rating :125V AC/DC
Ambient Temperature Range :-20° C⁺+60° C
Storage Temperature Range :-40° C⁺+70° C
Ambient Humidity Range :95% R.H. Max.
Contact Resistance:100mΩ_{max}
Insulation Resistance:1000MΩ_{min}./500VDC
Mating Cycles:3000-8000 Insertions
IR peak Temperature: 260° C

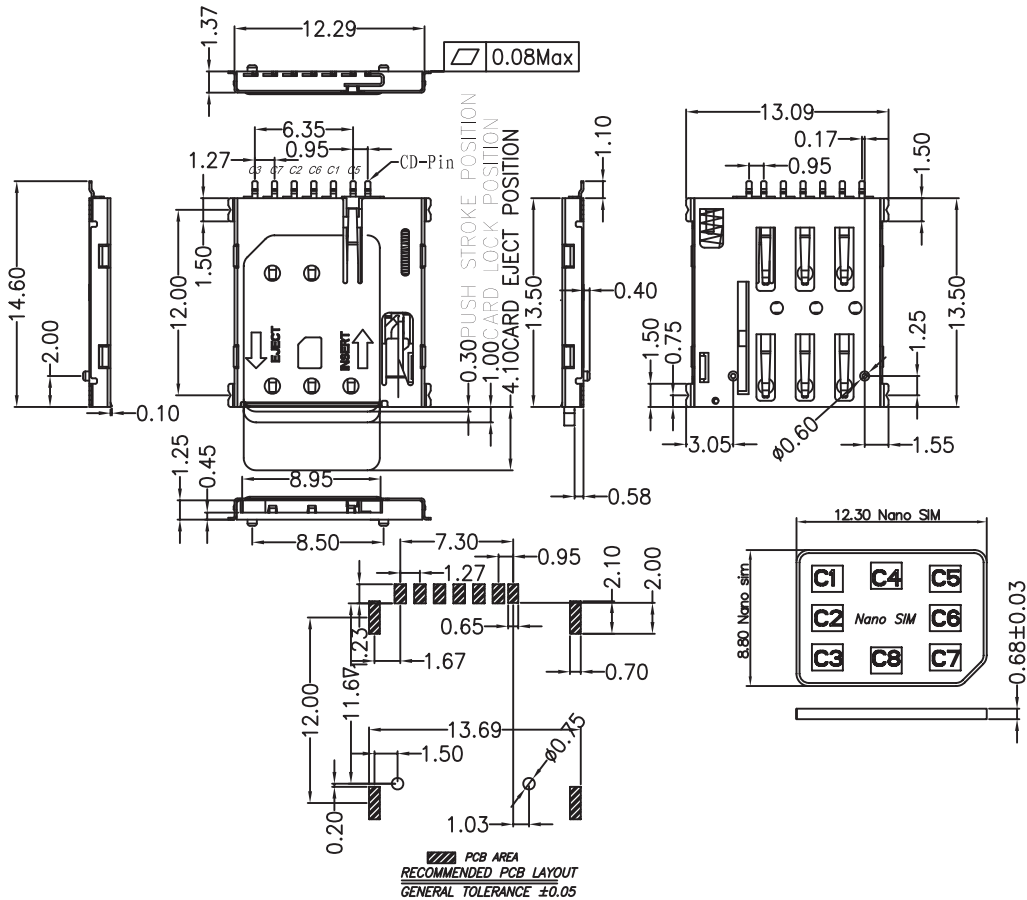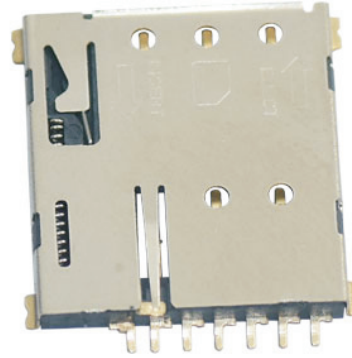

ORDER INFORMATION

Product NO.: L-KLS1-SIM-066-(6+1)P-H1.37-R

Pos. NO. _____ SIM Card Connector Type _____