



SR520 THRU SR5200

Reverse Voltage - 20 to 200 Volts Forward Current - 5.0 Ampere

SCHOTTKY BARRIER RECTIFIER


Features

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Metal silicon junction, majority carrier conduction
- ◆ Low power loss, high efficiency
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed: 250°C/10 seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension

Mechanical Data

Case : JEDEC DO-201AD Molded plastic body
Terminals : Solder plated, solderable per MIL-STD-750, Method 2026
Polarity : Polarity symbol marking on body
Mounting Position : Any
Weight : 0.04 ounce, 1.10 grams

DO-201AD

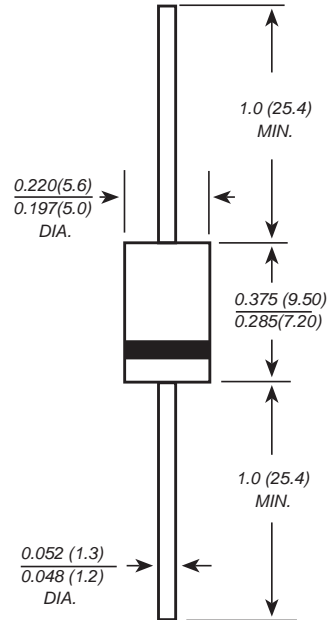

Dimensions in inches and (millimeters)

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

| Parameter | SYMBOLS | SR | SR | SR | SR | SR | SR | SR | SR | SR | SR | SR | UNITS |
|--|--------------------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|-------------------|-------------------|-------------------|-------|
| | | 520 | 530 | 540 | 550 | 560 | 570 | 580 | 590 | 5100 | 5150 | 5200 | |
| Marking Code | | MDD SR 520 | MDD SR 530 | MDD SR 540 | MDD SR 550 | MDD SR 560 | MDD SR 570 | MDD SR 580 | MDD SR 590 | MDD SR 5100 | MDD SR 5150 | MDD SR 5200 | |
| Maximum repetitive peak reverse voltage | V _{RRM} | 20 | 30 | 40 | 50 | 60 | 70 | 80 | 90 | 100 | 150 | 200 | V |
| Maximum RMS voltage | V _{RMS} | 14 | 21 | 28 | 35 | 42 | 49 | 56 | 63 | 70 | 105 | 140 | V |
| Maximum DC blocking voltage | V _{DC} | 20 | 30 | 40 | 50 | 60 | 70 | 80 | 90 | 100 | 150 | 200 | V |
| Maximum average forward rectified current 0.375" (9.5mm) lead length (see fig. 1) | I <sub(av)< sub=""></sub(av)<> | 5.0 | | | | | | | | | | | A |
| Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) | I _{FSM} | 150 | | | | | | | | | | | A |
| Maximum instantaneous forward voltage at 5.0A | V _F | 0.55 | | 0.70 | | | 0.85 | | | 0.95 | | | V |
| Maximum DC reverse current at rated DC blocking voltage | I _R | 0.5 | | | | | 0.2 | | | | | mA | |
| | | 20.0 | | | 10.0 | | | 2.0 | | | | | |
| Typical junction capacitance (NOTE 1) | C _J | 500 | | | 400 | | | | | | | | pF |
| Typical thermal resistance (NOTE 2) | R _{θJA} | 25.0 | | | | | | | | | | | °C/W |
| Operating junction and storage | T _J | -50 to +125 | | | | | -50 to +150 | | | | | | °C |
| Storage temperature range | T _{STG} | -50 to +150 | | | | | | | | | | | °C |

Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

2. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted




SR520 THRU SR5200

Reverse Voltage - 20 to 200 Volts Forward Current - 5.0 Ampere

Ratings And Characteristic Curves


AVERAGE FORWARD RECTIFIED CURRENT, AMPERES

FIG. 1- FORWARD CURRENT DERATING CURVE

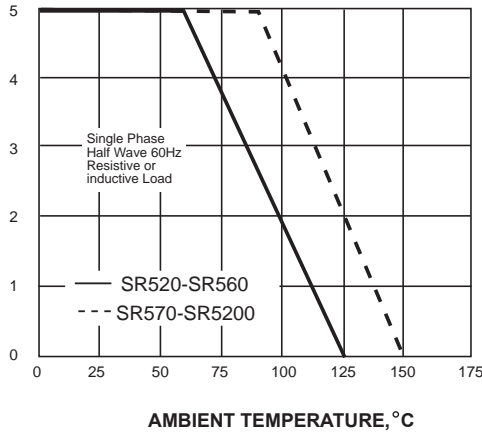


PEAK FORWARD SURGE CURRENT, AMPERES

FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

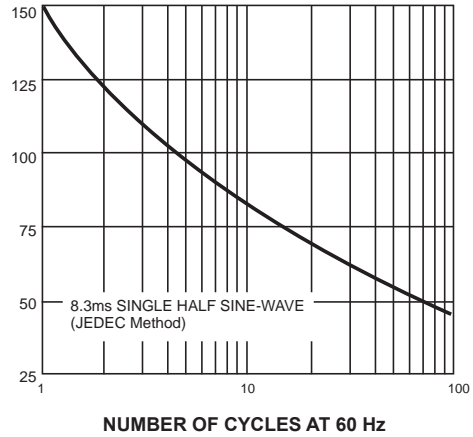


INSTANTANEOUS FORWARD CURRENT, AMPERES

FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

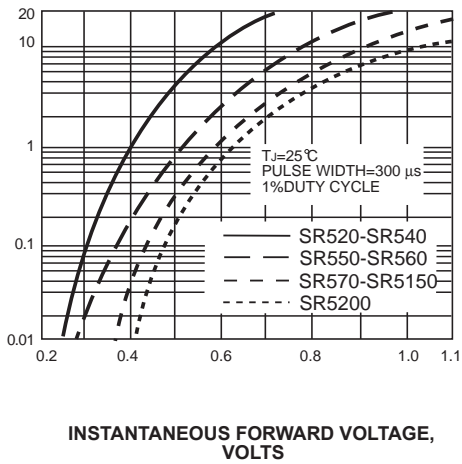


INSTANTANEOUS REVERSE CURRENT, MILLIAMPERES

FIG. 4-TYPICAL REVERSE CHARACTERISTICS

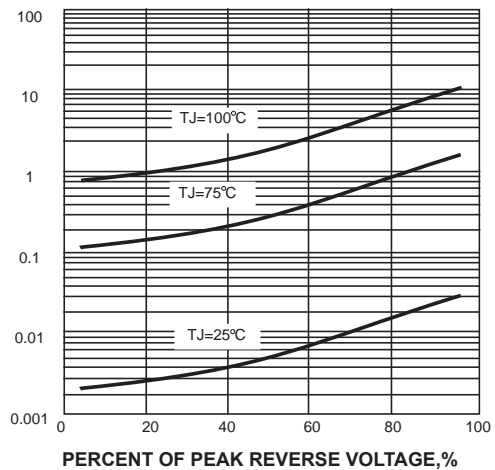


JUNCTION CAPACITANCE, pF

FIG. 5-TYPICAL JUNCTION CAPACITANCE

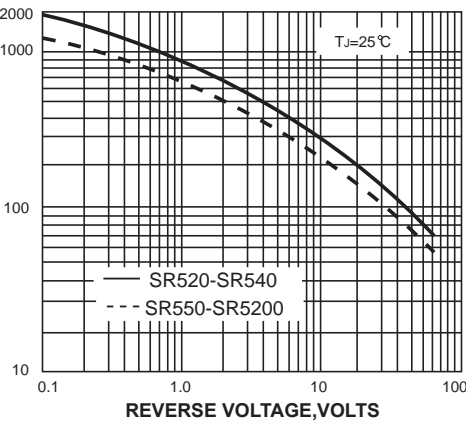

TRANSIENT THERMAL IMPEDANCE, °C/W

FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

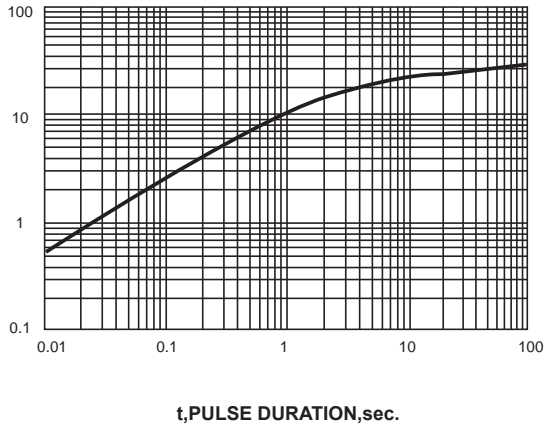

The curve above is for reference only.




SR520 THRU SR5200

Reverse Voltage - 20 to 200 Volts Forward Current - 5.0 Ampere

Package Information

Taping Specifications

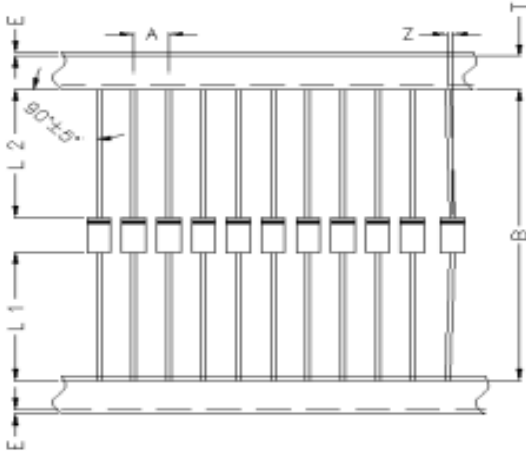

| Item | Symbol | Specifications(mm) |
|---------------------|--------|--------------------|
| Component Pitch | A | 10.0±0.5 |
| Inner Tape Pitch | B | 52.4±1.5 |
| Component alignment | Z | 1.2 Max |
| Tape width | T | 6.0±0.5 |
| Exposed adhesive | E | 0.8 Max |
| Body eccentricity | L1-L2 | 1.0 Max |

Ammunition Package Specifications

| Package | Inner Box Size (mm) | QTY/Box (pcs) | Carton Size (mm) | Q'TY/Carton (pcs) |
|------------|---------------------|---------------|------------------|-------------------|
| DO - 201AD | 255*74*145 | 1000 | 410*275*340 | 10000 |

Bulk Package Specifications

| Package | Inner Box Size (mm) | QTY/Box (pcs) | Carton Size (mm) | Q'TY/Carton (pcs) |
|------------|---------------------|---------------|------------------|-------------------|
| DO - 201AD | 198*86*21 | 200 | 460*220*250 | 10000 |

Important Notice and Disclaimer

Microdiode Electronics (Jiangsu) reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

Microdiode Electronics (Jiangsu) makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Microdiode Electronics (Jiangsu) assume any liability for application assistance or customer product design. Microdiode Electronics (Jiangsu) does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of Microdiode Electronics (Jiangsu).

Microdiode Electronics (Jiangsu) products are not authorized for use as critical components in life support devices or systems without express written approval of Microdiode Electronics (Jiangsu).