



# STPS1L30A/U


## LOW DROP POWER SCHOTTKY RECTIFIER

### MAIN PRODUCT CHARACTERISTICS

$I_{F(AV)}$	1 A
$V_{RRM}$	30 V
$T_j$ (max)	150 °C
$V_F$ (max)	0.3 V

### FEATURES AND BENEFITS

- VERY LOW FORWARD VOLTAGE DROP FOR LESS POWER DISSIPATION
- OPTIMIZED CONDUCTION/REVERSE LOSSES TRADE-OFF WHICH MEANS THE HIGHEST YIELD IN THE APPLICATIONS
- SURFACE MOUNT MINIATURE PACKAGE

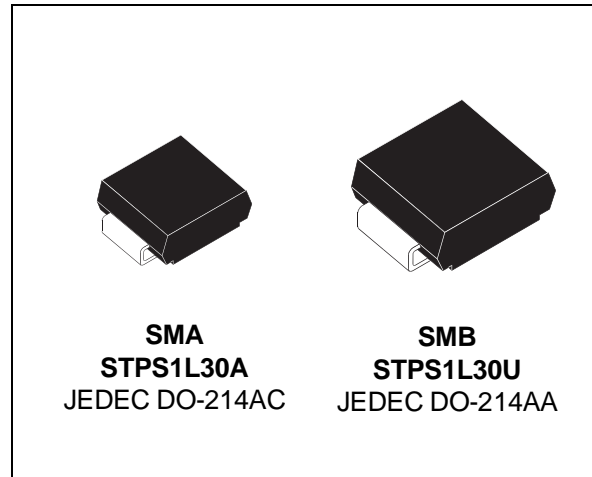

### DESCRIPTION

Single Schottky rectifier suited to Switched Mode Power Supplies and high frequency DC to DC converters, freewheel diode and integrated circuit latch up protection.

Packaged in SMA and SMB, this device is especially intended for use in parallel with MOSFETs in synchronous rectification.

### ABSOLUTE RATINGS (limiting values)

Symbol	Parameter	Value	Unit
$V_{RRM}$	Repetitive peak reverse voltage	30	V
$I_{F(RMS)}$	RMS forward current	10	A
$I_{F(AV)}$	Average forward current	$T_L = 135^\circ\text{C} \delta = 0.5$ 1	A
$I_{FSM}$	Surge non repetitive forward current	$t_p = 10 \text{ ms}$ Sinusoidal	A
$I_{RRM}$	Repetitive peak reverse current	$t_p = 2 \mu\text{s}$ $F = 1 \text{ kHz}$ square	A
$I_{RSM}$	Non repetitive peak reverse current	$t_p = 100 \mu\text{s}$ square	A
$T_{stg}$	Storage temperature range	- 65 to + 150	°C
$T_j$	Maximum operating junction temperature *	150	°C
$dV/dt$	Critical rate of rise of reverse voltage	10000	V/ $\mu\text{s}$

\* :  $\frac{dP_{tot}}{dT_j} < \frac{1}{R_{th(j-a)}}$  thermal runaway condition for a diode on its own heatsink

# STPS1L30A/U

## THERMAL RESISTANCES

Symbol	Parameter		Value	Unit
$R_{th(j-l)}$	Junction to lead	SMA	30	$^{\circ}\text{C}/\text{W}$
		SMB	25	


## STATIC ELECTRICAL CHARACTERISTICS

Symbol	Parameters	Tests Conditions		Min.	Typ.	Max.	Unit
$I_R^*$	Reverse leakage Current	$T_j = 25^{\circ}\text{C}$	$V_R = V_{RRM}$			200	$\mu\text{A}$
		$T_j = 100^{\circ}\text{C}$			6	15	mA
$V_F^*$	Forward Voltage drop	$T_j = 25^{\circ}\text{C}$	$I_F = 1\text{ A}$			0.395	V
		$T_j = 125^{\circ}\text{C}$			0.26	0.3	
		$T_j = 25^{\circ}\text{C}$	$I_F = 2\text{ A}$			0.445	
		$T_j = 125^{\circ}\text{C}$			0.325	0.375	


Pulse test : \*  $t_p = 380\ \mu\text{s}$ ,  $\delta < 2\%$

To evaluate the maximum conduction losses use the following equation :  
 $P = 0.225 \times I_{F(AV)} + 0.075 I_{F(RMS)}^2$


**Fig. 1:** Average forward power dissipation versus average forward current.

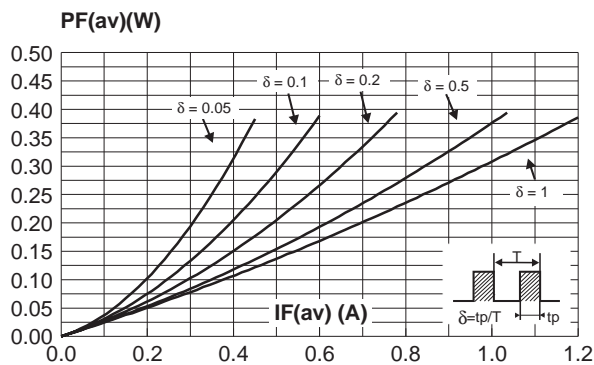


**Fig. 3-1:** Non repetitive surge peak forward current versus overload duration (maximum values) (SMA).

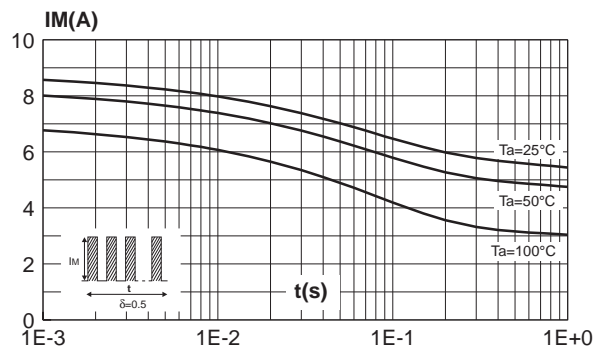


**Fig. 2:** Average forward current versus ambient temperature ( $\delta=0.5$ ).

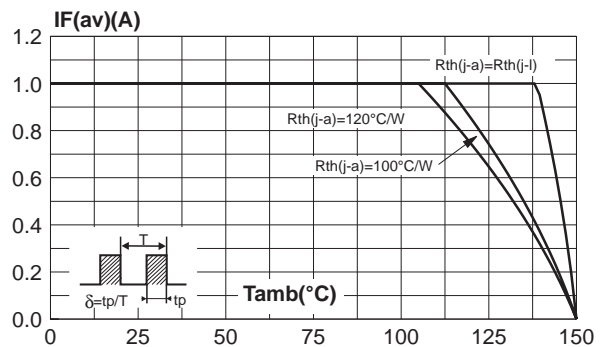


**Fig. 3-2:** Non repetitive surge peak forward current versus overload duration (maximum values) (SMB).

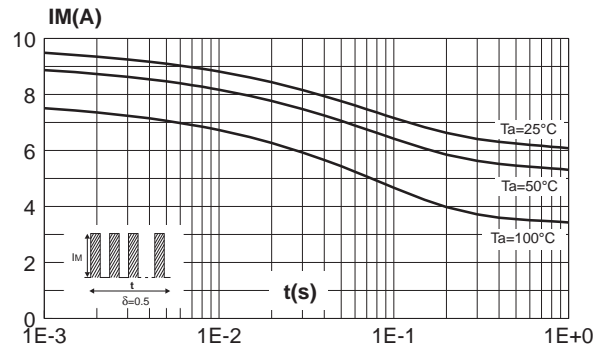


**Fig. 4-1:** Relative variation of thermal impedance junction to ambient versus pulse duration (epoxy printed circuit board,  $\epsilon(\text{Cu})=35\mu\text{m}$ , recommended pad layout) (SMB).

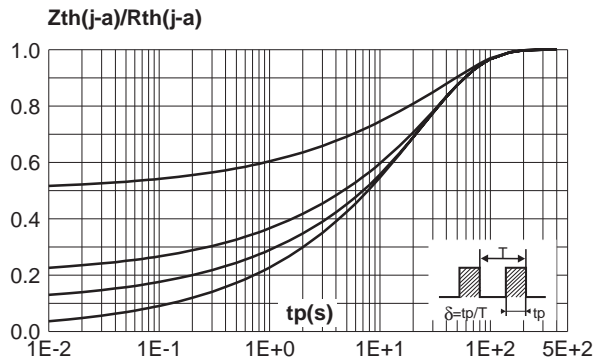


**Fig. 4-2:** Relative variation of thermal impedance junction to ambient versus pulse duration (epoxy printed circuit board,  $\epsilon(\text{Cu})=35\mu\text{m}$ , recommended pad layout) (SMA).

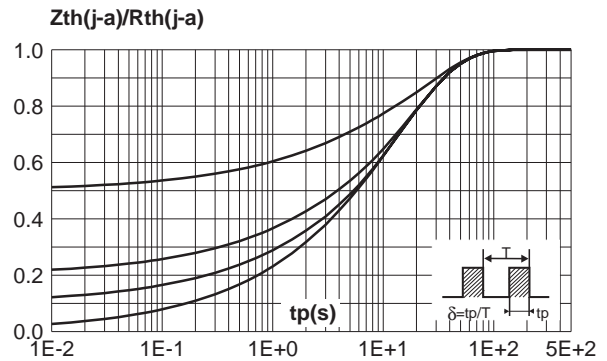


**Fig. 5:** Reverse leakage current versus reverse voltage applied (typical values).

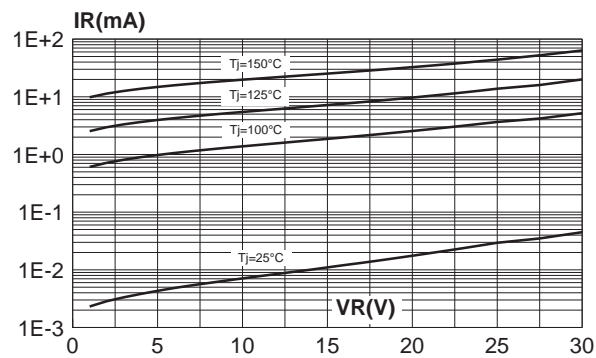


**Fig. 6:** Junction capacitance versus reverse voltage applied (typical values).

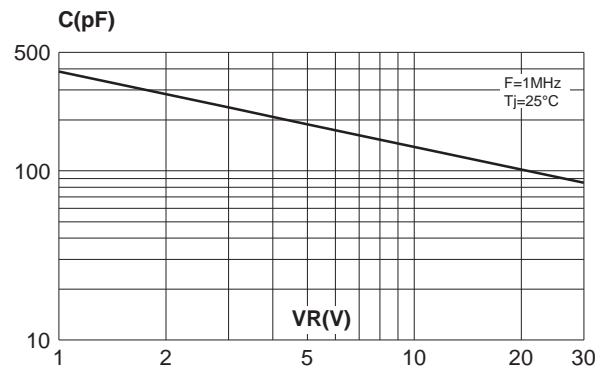

**Fig. 7-1:** Forward voltage drop versus forward current (typical values, high level).

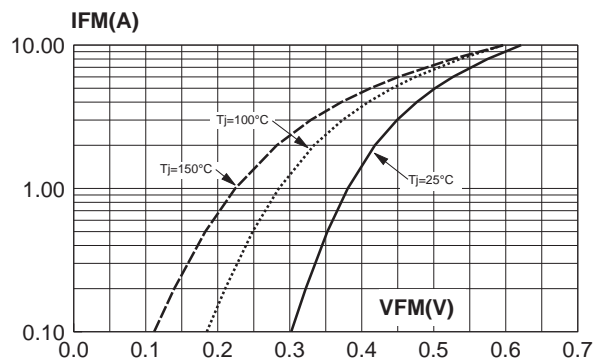


**Fig. 7-2:** Forward voltage drop versus forward current (maximum values, low level).

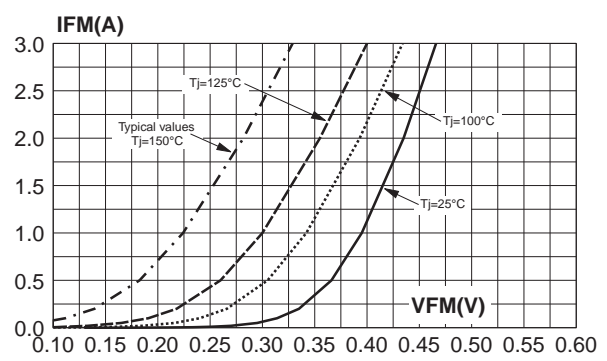


## STPS1L30A/U

**Fig. 8-1:** Thermal resistance junction to ambient versus copper surface under each lead (Epoxy printed circuit board FR4, copper thickness: 35µm) (SMB).

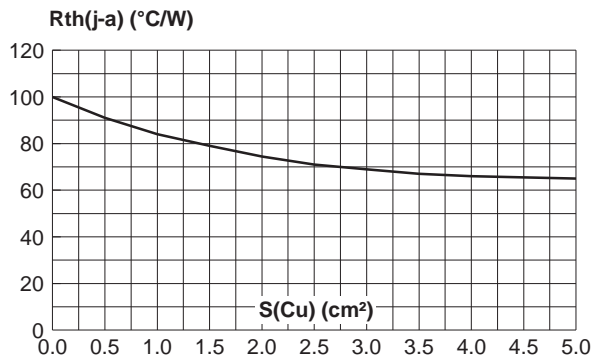

**Fig. 8-2:** Thermal resistance junction to ambient versus copper surface under each lead (Epoxy printed circuit board FR4, copper thickness: 35µm) (SMA).

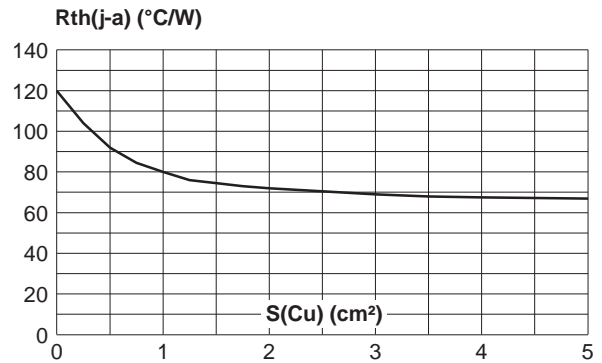


## PACKAGE MECHANICAL DATA

### SMA


REF.	DIMENSIONS			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A1	1.90	2.70	0.075	0.106
A2	0.05	0.20	0.002	0.008
b	1.25	1.65	0.049	0.065
c	0.15	0.41	0.006	0.016
E	4.80	5.60	0.189	0.220
E1	3.95	4.60	0.156	0.181
D	2.25	2.95	0.089	0.116
L	0.75	1.60	0.030	0.063

### FOOT PRINT DIMENSIONS (in millimeters)

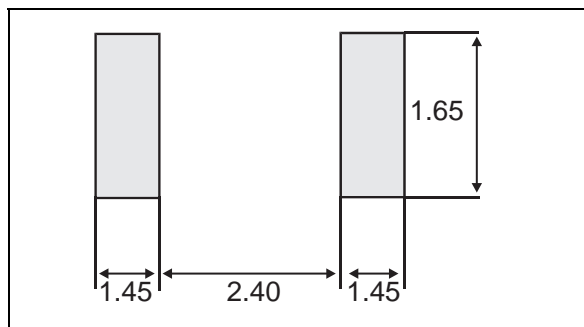

**PACKAGE MECHANICAL DATA**  
**SMB**

REF.	DIMENSIONS			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A1	1.90	2.45	0.075	0.096
A2	0.05	0.20	0.002	0.008
b	1.95	2.20	0.077	0.087
c	0.15	0.41	0.006	0.016
E	5.10	5.60	0.201	0.220
E1	4.05	4.60	0.159	0.181
D	3.30	3.95	0.130	0.156
L	0.75	1.60	0.030	0.063

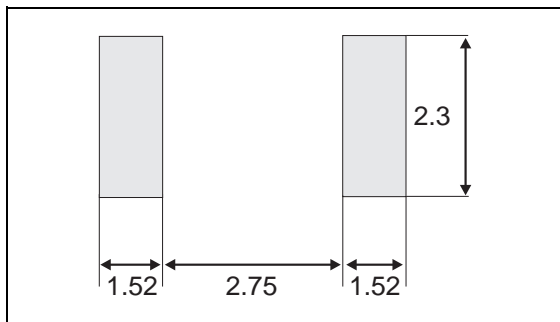**FOOT PRINT DIMENSIONS (in millimeters)**


Ordering type	Marking	Package	Weight	Base qty	Delivery mode
STPS1L30U	G23	SMB	0.107g	2500	Tape & reel
STPS1L30A	GB3	SMA	0.068g	5000	Tape & reel

- Band indicates cathode
- Epoxy meets UL94,V0

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

© 1999 STMicroelectronics - Printed in Italy - All rights reserved.

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia  
 Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - U.S.A.

<http://www.st.com>