


EPOXY SEAL

Rated current : 3A, 120VAC/ 1.5A, 250VAC  
 Contact Resistance: 10mΩ MAX (initial)

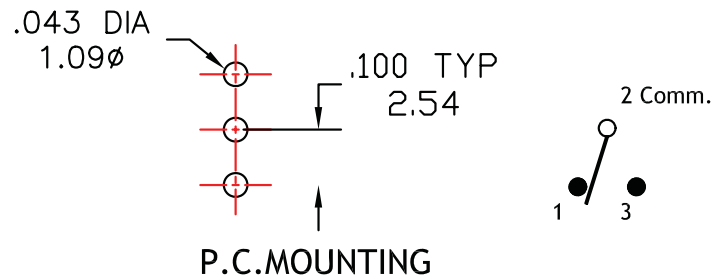

model no.	switching position		
TS-4S	on	none	on
TS-4AS	on	off	on
term comm.	2-3	open	2-1

NOTE: TOLERANCES UNLESS OTHERWISE SPECIFIED:  $\pm \frac{0.012}{0.3}$  (in/mm)

REVISION	DESCRIPTION	REVISED BY	TOLERANCES		ANGLE	UNIT	mm	PART NAME	TS SPEC DRAWING	DWG NO	
△			DRAWN BY	Alice	DESIGNED BY	Eric	SCALE			WS0419A	
△			CHECKED BY		APPROVED BY		DATE	2006.07.28	PART NO		TS-4S / TS-4AS
△	2006.07.28 換新圖框, 重新出圖	吳美玉									