
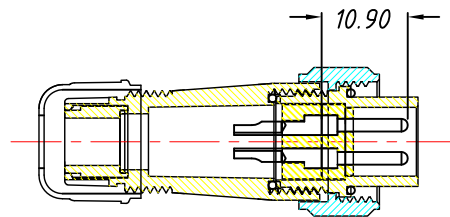

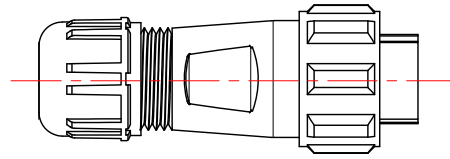
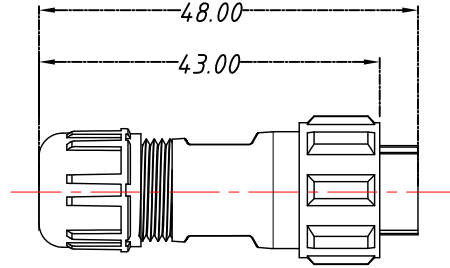


1
RoHS Compliance




SECTION A-A

Material & SPEC.

- 1.Shell Material: PPO,PA66 UL94V-0
- 2.Insulation Materials: PPS, High Temperature 260°C
- 3.Contact: Brass,Gold-plated
- 4.Insulation resistance: 2000MΩ
- 5.Number of poles: 2~9 poles
- 6.Coupling: Threaded
- 7.Termination: Solder
- 8.Cable outer Diameter: Not- 4~6.5mm; G- 5~8mm
- 9.IP Rating: IP68
- 10.Durability: 500 mating cycles
- 11.Temperature Range: -25°C~+80°C

ORDER INFORMATION:

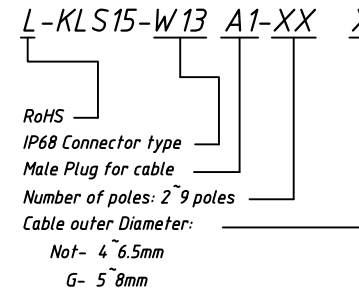


Solder contact arrangement and spec


Number of contact	2	3	4	5	6	7	9
Male contact face view							
Rated current (A)	13A	13A	5A	5A	5A	5A	3A
Contact diameter	∅1.6x2	∅1.6x3	∅1.0x4	∅1.0x5	∅1.0x6	∅1.0x7	∅0.7x9
Rated voltage(AC.V)	250V	250V	200V	180V	125V	125V	125V
Test voltage(AC.V) 1min	1500V	1500V	1500V	1000V	1000V	1000V	1000V
Contact resistance mΩ	2	2	5	5	5	5	10
Wire size solder mm ² /AWG	≤2/14	≤2/14	≤0.785/18	≤0.785/18	≤0.785/18	≤0.785/18	≤0.785/18

Match Connector

KLS15-W13A2



KLS15-W13A4



GENERAL TOLERANCE		PROJECTION	Description:
.X	±0.05	UNITS	IP68 W13 CONN, Male Plug for cable, Solder
.XX	±0.02	SHEET SIZE	
		KLS P/N: KLS15-W13A1-XX	
Draw:	Daniel	2018-08-27	NingBo KLS ELECTRONIC CO.,L TD.
Check:	Daniel	2018-08-27	
SCALE	1:1	SHEET	