


CH1 A/R SWR

f: 1.198U

MKR


REF 1.000 U

1.000 U/ 2400 000 000.HZ

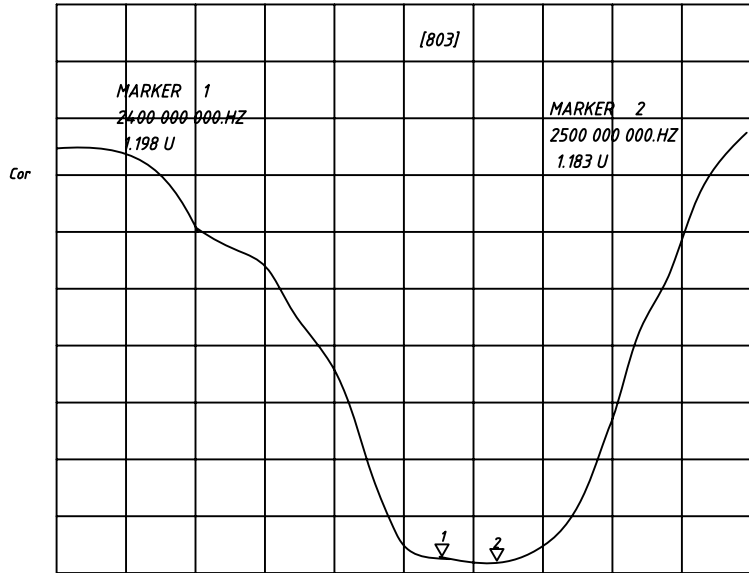

CH1 START 2000 000 000.HZ

STOP 2 700 000 000.HZ

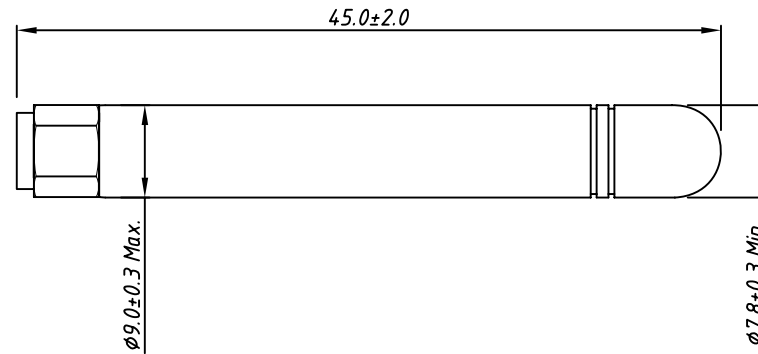

Specification:

Frequency : 2400 ~ 2500MHz

Gain : 2dBi

Vswr : 1.5 Max.

Impedance : 50 Ω

Polarization : Vertical

Radiation : OMNIDIRECTIONAL

Max power : 50W

Shell material : PVC

Connector : SMA Pin Straight

Lightning protection: DC Grounding

Operating Temperature : -30°C to +70°C

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	⊕	Description:
X. ±0.60	X. ±5°	UNITS	mm	WIFI 2.4G Antenna
.X ±0.38	.X ±3°	SHEET SIZE	A4	
.XX ±0.25	.XX ±2°	KLS P/N: KLS1-WIFI-2.4G-02-MS-45MM		

Draw by: Date 2016-11-11

Check by:: Date 2016-11-11

SCALE SHEET OF

KLS ELECTRONIC CO., LTD.