


CH1 A/R SWR

f: 1.198U

MKR


1.000 U/ 2400 000 000.HZ

REF 1.000 U

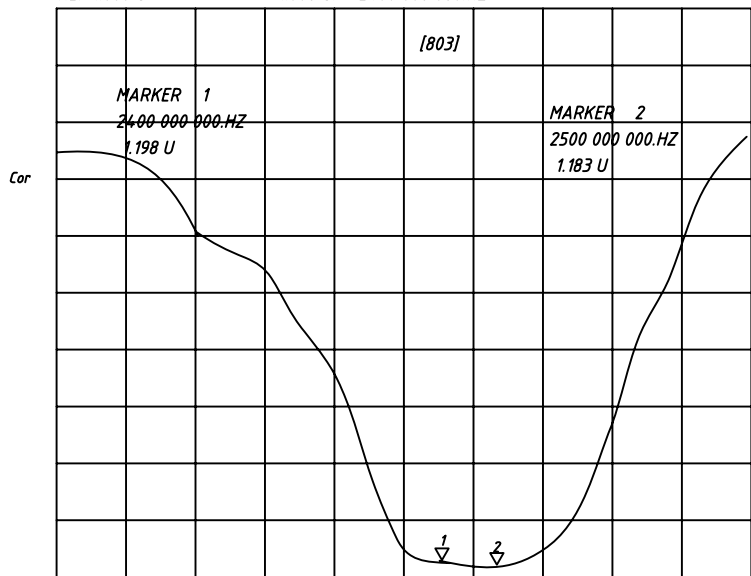

CH1 START 2000 000 000.HZ

STOP 2 700 000 000.HZ

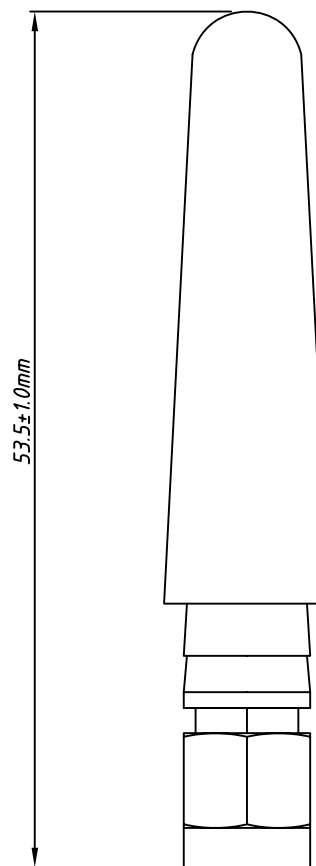

Specification:

Frequency : 2400 ~ 2500MHz

Gain : 2dBi

Vswr : 1.5 Max.

Impedance : 50 Ω

Polarization : Vertical

Radiation : OMNIDIRECTIONAL

Max power : 50W

Shell material : PVC

Connector : SMA Pin

Lightning protection: DC Grounding

Operating Temperature : -30°C to +70°C

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	⊕	Description:
X.	±0.60	X.	±5°	UNITS	mm	WIFI 2.4G Antenna
.X	±0.38	.X	±3°	SHEET SIZE	A4	
.XX	±0.25	.XX	±2°	KLS P/N: KLS1-WIFI15010		
Draw by: Date		2016-11-11		KLS ELECTRONIC CO., LTD.		
Check by:: Date		2016-11-11				
SCALE		SHEET	OF			