


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE

Notes:

- Rated voltage/current: UL1059 600V 20A
IEC 800V 32A
- Operation temperatures: -40° C ~ +105° C
- Withstanding Voltage: AC3000V/1Min
- Insulation Resistance: 5000MΩ / DC1000V
- Wire Range: 28~12AWG 4mm²
- Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						—
to	over	to	over	to	over	to	to	
6	6	10	10	6	30	90	200	∩
6	10	24	24	6	30	90	200	◇
±0.10	±0.15	±0.25	±0.1	±0.2	±0.3	±0.5	±0.7	0.05/10

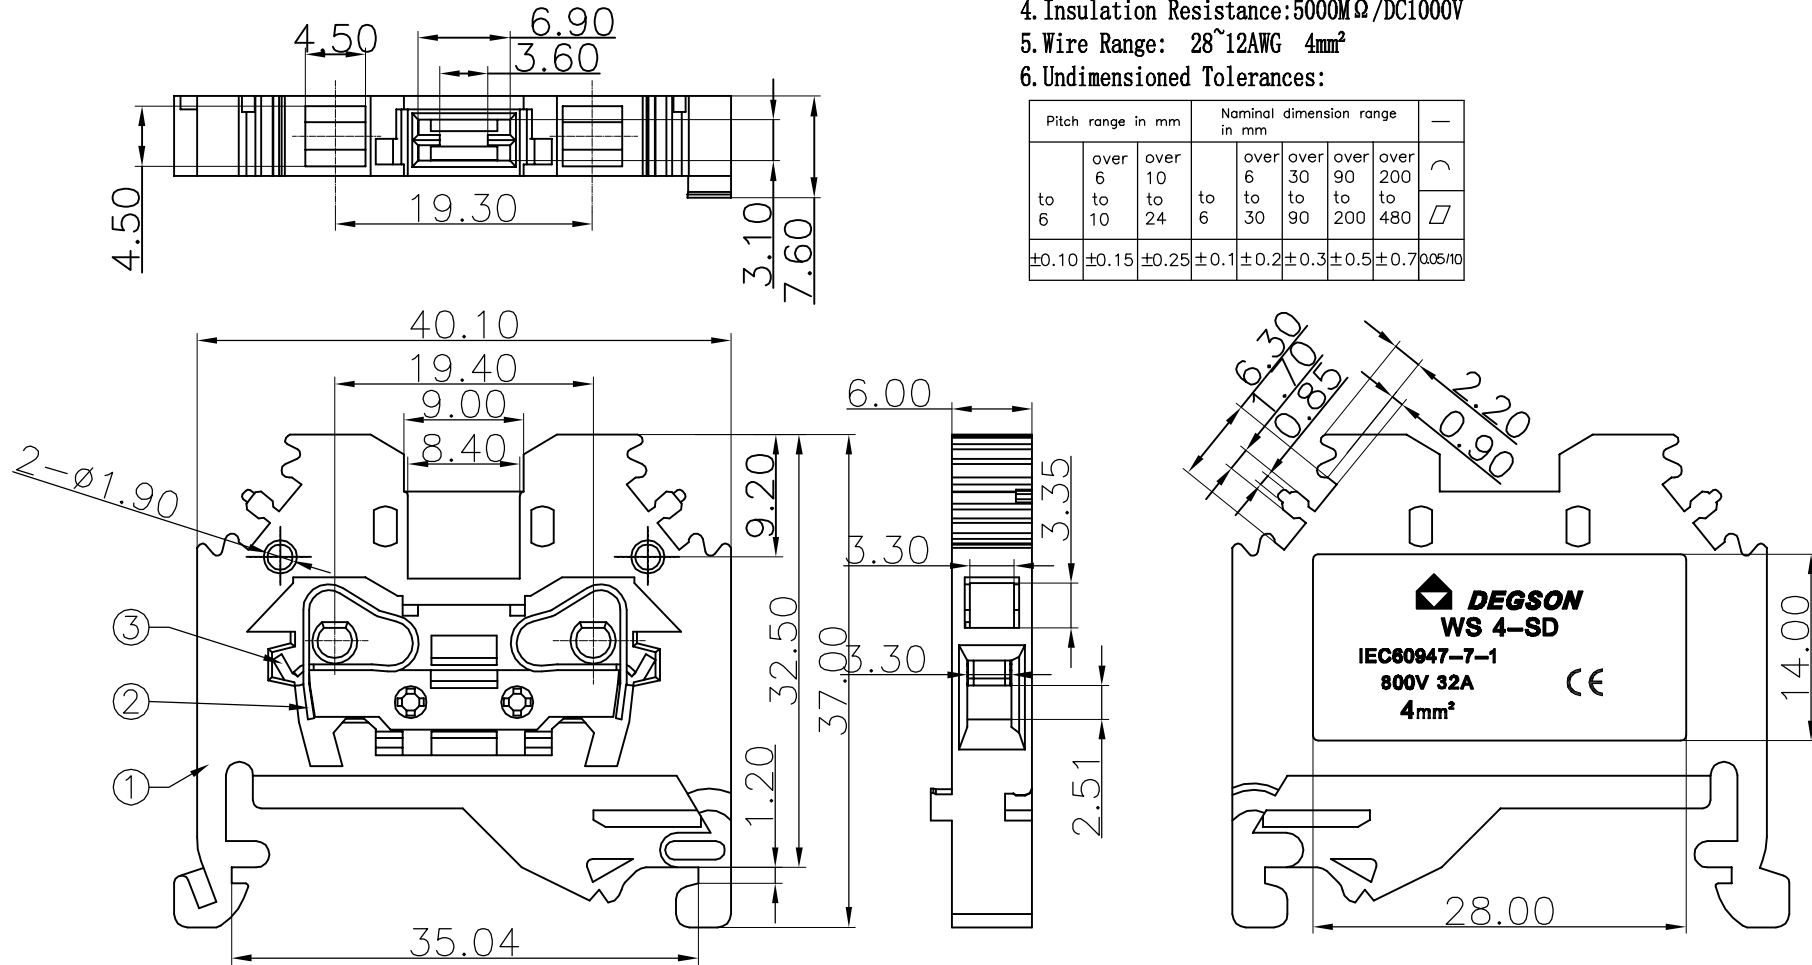

3	WS 4-SD Current Carrier	6061B00010(H)	1	Copper	SnCe plated
2	WS 4-SD Spring	X000000600(H)	2	Stainless steel	

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES																								
1	WS 4-SD Housing	6061A0Y01A(H)	1	PA66	UL94V-0																								
<table border="1"> <tr> <td>← INCH →</td> <td>DEPTO Zimun</td> <td>DATE 05/02/08'</td> </tr> <tr> <td>TOLERANCES EXCEPT AS NOTED</td> <td>CHD</td> <td>DATE</td> </tr> <tr> <td></td> <td>MFO</td> <td>DATE</td> </tr> <tr> <td></td> <td>APPVL</td> <td>DATE</td> </tr> <tr> <td></td> <td>MATERIAL :</td> <td></td> </tr> <tr> <td></td> <td>G. E :</td> <td></td> </tr> <tr> <td></td> <td>FINISH :</td> <td></td> </tr> <tr> <td></td> <td>SCALE : 1:1</td> <td></td> </tr> </table>						← INCH →	DEPTO Zimun	DATE 05/02/08'	TOLERANCES EXCEPT AS NOTED	CHD	DATE		MFO	DATE		APPVL	DATE		MATERIAL :			G. E :			FINISH :			SCALE : 1:1	
← INCH →	DEPTO Zimun	DATE 05/02/08'																											
TOLERANCES EXCEPT AS NOTED	CHD	DATE																											
	MFO	DATE																											
	APPVL	DATE																											
	MATERIAL :																												
	G. E :																												
	FINISH :																												
	SCALE : 1:1																												
<p>DEGSON 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD</p> <p>NAME WS 4-SD-01P-1Y-00A(H)</p> <p>DRAWING NO. WS 4-SD-E01 SIZE A3 REV TO 01/01/08'</p> <p>/PART NO.</p> <p>DO NOT SCALE DRAWING SHEET 1 OF 1</p>																													