



ZL311 SERIES 1.27 MM (0.05") PIN HEADER SINGLE ROW

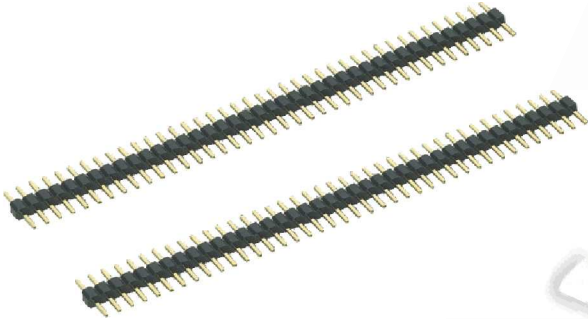

Specification:

- 1) To +105° Current Rate: 3 A
- 2) Dielectric Withstanding Voltage: 500 VAC
- 3) Insulation Resistance: 5000 MW
- 4) Temperature: -55°C ~ 105°C
- 5) Insulator: Thermoplastic (UL94V-0)
- 6) Contact: Copper Alloy


Series No.	No. of Contact (N)	Contact Plating
ZL311-10P-T	1 x 10	Tin
ZL311-10P	1 x 10	Gold
ZL311-20P-T	1 x 20	Tin
ZL311-20P	1 x 20	Gold
ZL311-40P-T	1 x 40	Tin
ZL311-40P	1 x 40	Gold

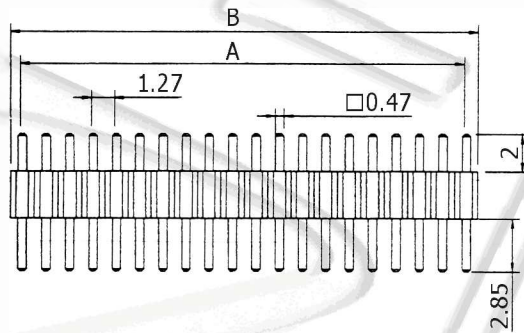

$$A = 1.27 * (N - 1)$$

$$B = 1.27 * N$$

Pitch: 1.27 mm



All dimensions in mm.