

0.70" (17.80mm) Φ 1.90mm 5*7 Single Color Dot Matrix Displays

Features:

- *High dot intensity
- *Wide viewing angle
- *Range of colors
- *Black face white dot
- *RoHS compliant

Available option:

- *Alternative face and dot color
- *Cropped terminal pins
- *Available emitting color
- *Low current version

Electro/Optical Characteristics $I_f=20mA$ $T_a=25^\circ C$


Part Number Row Cathode Column Anode	Part Number Row Anode Column Cathode	Emitting Color	Peak Wavelength	Forward Voltage V_f /Dot		Luminous Intensity I_v /Dot	
				Typ.	Max.	Min.	Typ.
LM-57R07-CC	LM-57R07-C	GaP/GaP Red	700	2.25	2.50	0.40	0.80
LM-57HR07-CC	LM-57HR07-C	GaAlAs/GaAs SH Hi-Red	660	1.80	2.20	8.00	12.00
LM-57SR07-CC	LM-57SR07-C	GaAlAs/GaAs DH Super Red	660	1.80	2.20	22.00	28.00
LM-57O07-CC	LM-57O07-C	GaAsP/GaP Orange	632	2.10	2.50	8.00	12.00
LM-57Y07-CC	LM-57Y07-C	GaAsP/GaP Yellow	585	2.10	2.50	4.00	7.00
LM-57G07-CC	LM-57G07-C	GaP/GaP Green	568	2.20	2.50	7.00	11.00
Units			nm	V		mcd	

Maximum Ratings $T_a=25^\circ C$ (Derate above $25^\circ C$)

Characteristic	Test Condition	Symbol	R	HR	SR	O	Y	G	Units
Pulse Forward Current Per Dot	1/10 duty cycle 0.1ms Pulse width	I_{FP}	50	100	100	100	100	100	mA
DC Forward Current Per Dot		I_F	15	25	25	30	30	30	mA
Reverse Current Per Dot	$V_R=5V$	I_R	10	10	10	10	10	10	μA
Power Dissipation		P_D	40*35	60*35	60*35	80*35	80*35	80*35	mW
Operating Temperature		T_{OPR}	-40 to +80						$^\circ C$
Storage Temperature		T_{STG}	-40 to +85						$^\circ C$
Lead soldering temperature	1.60mm from body maximum 3 seconds		260						$^\circ C$

0.70" (17.80mm) Φ 1.90mm 5*7 Single Color Dot Matrix Displays


PACKAGE DIMENSION

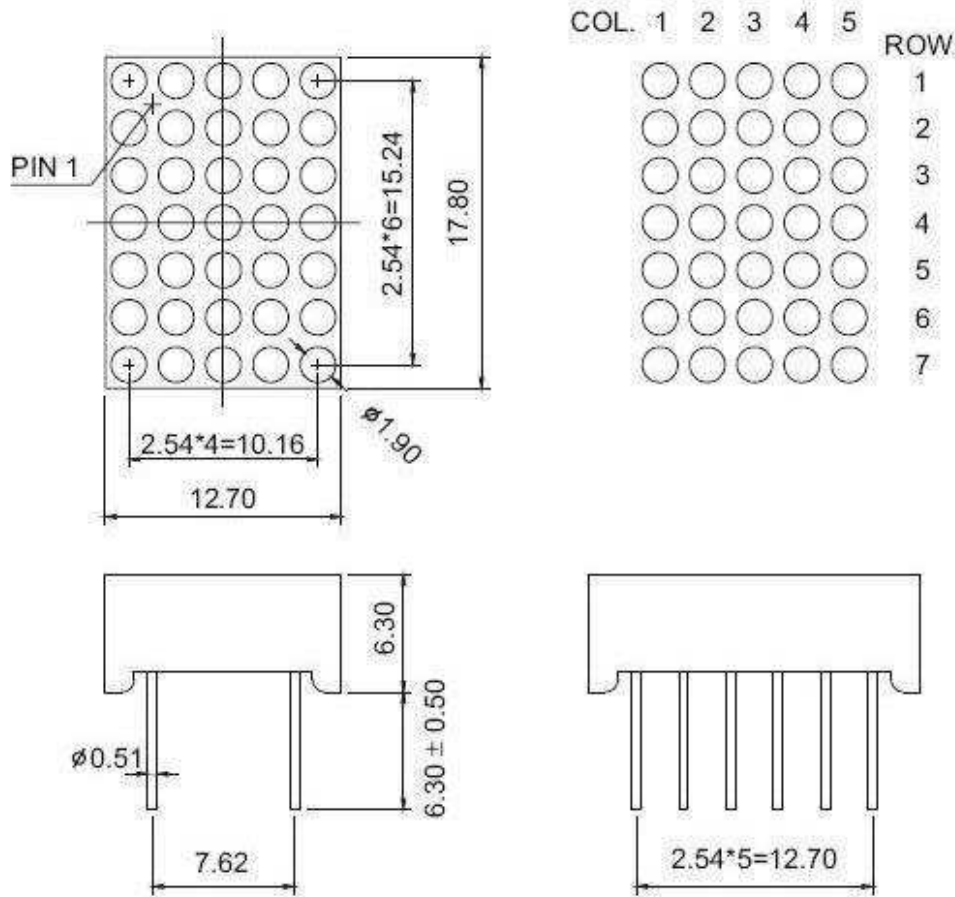

Tolerance ± 0.25 mm unless stated

INTERNAL CIRCUIT DIAGRAM

Row Cathode
Column Anode
LM-57XX07-CC

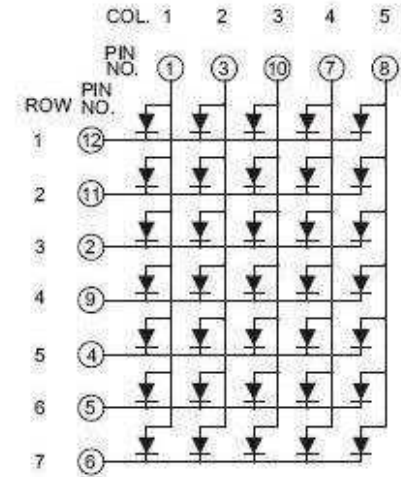

Row Anode
Column Cathode
LM-57XX07-C

