


Features

1. Molded epoxy body.
2. Zero crossing circuit.
3. High input/output insulation.
4. Small size and light weight.
5. Can be installed directly on the PC board.
6. Fast reactive speed.
7. Normally open.


Applications

1. Household Appliances.
2. Temperature Control System.
3. Industrial Automatic Control.
4. Lighting System.
5. Office Appliances.
6. Factory Appliances.

Outside Dimension : Unit (mm)

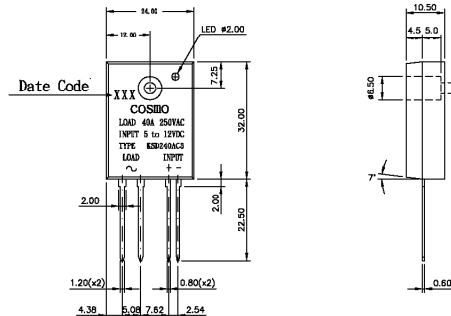

Schematic : Top View

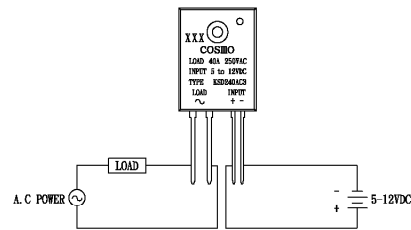

Absolute Maximum Ratings

(Ta=25°C)

Parameter	Symbol	Rating	Unit
Input	Input Signal Voltage	V _{IN}	5~12
	Drop-out Voltage	V _{do}	1
Output	RMS on-state current	I _T	40
	Peak one cycle surge current (8.3 ms)	I _{surge}	400
	Repetitive peak-off state Voltage	V _{DRM}	600
	Operating frequency	f	47~70
	Critical rate of rise of on-state current	di/dt	50
	Load supply voltage	V _{out}	250
Isolation Voltage input to output	V _{iso}	4000	
Operating Temperature	T _{opr}	-30~100	
Storage Temperature	T _{stg}	-30~125	
Soldering Temperature 10 Sec	T _{sol}	260	

Electrical Characteristics

(Ta=25°C)

Parameter	Symbol	Conditions	MIN	TYP	MAX	Unit
Input	Pick-up Voltage	V _{pu}			4	VDC
	Input current	I _{in}	V _{in} =5-12V	5		35
Output	On-state Voltage	V _T	I _T =1Arms		1.5	V _{rms}
	Operating Current	I _{op}	V _{out} =240V _{rms}	50		mArms
	Leakage Current	I _{leak}	V _{out} =240V _{rms}			7
	Critical rate of rise of off-state Voltage	dv/dt	See Note 1	50	200	V/μS
	Zero-cross Voltage				Yes	
	Load Voltage Rating	V _{out}	I _T =50mArms MIN	50		280
Minimum trigger current	I _{FT}	V _{DRM} =600V			25	
Isolation resistance input to output	R _{iso}	DC500V	10 ¹⁰			
Turn-on time	T _{on}	60Hz AC			8.3	
Turn-off time	T _{off}	60Hz AC			8.3	
Thermal resistance (between junction and case)	R _{th(j-c)}			1.3		

Note1 : Output (dv/dt) protection is provided in all models, and they are designed to switch resistive or inductive loads to 0.2 power factor. The dv/dt rating is based on source impedance of 50 ohms.

Data Curve

