

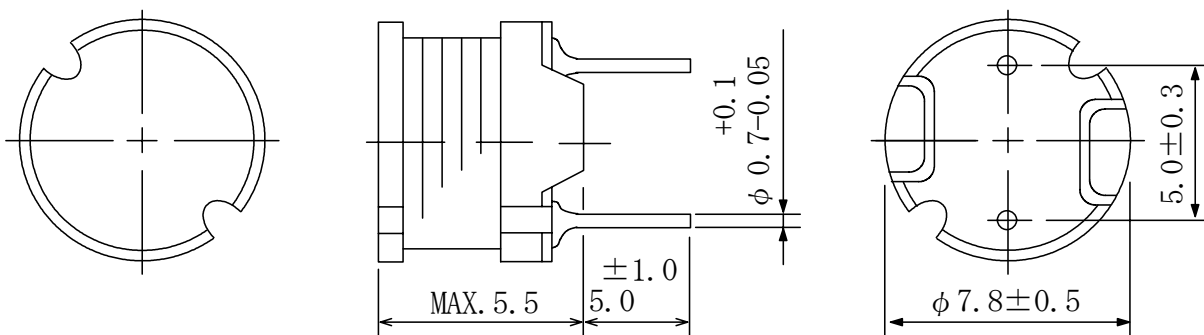
**Type: RCH-855**

**◆ Product Description**

- 8.3mm Max.  $\phi$ , 5.5mm Max. Height.
- Inductance Range:  $2.5 \mu\text{H} \sim 10\text{mH}$
- Rated current range:  $37\text{mA} \sim 3.1\text{A}$
- In addition to the standard versions of inductors shown here, custom inductors are available to meet your exact requirements.

**◆ Feature**

- Magnetically unshielded construction.
- Ideally Used in Printers, LCD TV, DVD, Printer, Copy Machine, Mainboard of the compounding machines, etc as Power Supplies's Inductors or DC-DC Converter inductors.
- RoHS Compliance

**◆ Dimensions (mm)**


**Type: RCH-855**
**◆ Specification**

Part Name	Stamp	Inductance <Within>(μ H) ※ 1	D.C.R(Ω) <Max.> (at20°C)	Saturation Current (A)※2	Temperature rise current (A)※3
RCH855NP-2R5M	2R5M	2.5±20%	23m	4.5	3.1
RCH855NP-3R3M	3R3M	3.3±20%	26m	4.0	2.7
RCH855NP-4R1M	4R1M	4.1±20%	31m	3.6	2.5
RCH855NP-5R0M	5R0M	5.0±20%	34m	3.4	2.4
RCH855NP-5R9M	5R9M	5.9±20%	39m	3.2	2.2
RCH855NP-6R8M	6R8M	6.8±20%	42m	2.9	2.1
RCH855NP-8R2M	8R2M	8.2±20%	45m	2.7	1.9
RCH855NP-100M	100M	10±20%	70m	2.5	1.3
RCH855NP-120M	120M	12±20%	80m	2.4	1.1
RCH855NP-150M	150M	15±20%	90m	2.1	0.95
RCH855NP-180M	180M	18±20%	100m	2.0	0.90
RCH855NP-220K	220K	22±10%	120m	1.7	0.77
RCH855NP-270K	270K	27±10%	140m	1.6	0.72
RCH855NP-330K	330K	33±10%	170m	1.4	0.67
RCH855NP-390K	390K	39±10%	210m	1.3	0.59
RCH855NP-470K	470K	47±10%	240m	1.2	0.57
RCH855NP-560K	560K	56±10%	0.31	1.1	0.50
RCH855NP-680K	680K	68±10%	0.34	1.0	0.47
RCH855NP-820K	820K	82±10%	0.40	0.93	0.43
RCH855NP-101K	101K	100±10%	0.52	0.81	0.37
RCH855NP-121K	121K	120±10%	0.59	0.76	0.36
RCH855NP-151K	151K	150±10%	0.71	0.67	0.32
RCH855NP-181K	181K	180±10%	0.89	0.62	0.30
RCH855NP-221K	221K	220±10%	1.04	0.54	0.28
RCH855NP-271K	271K	270±10%	1.28	0.49	0.25
RCH855NP-331K	331K	330±10%	1.47	0.44	0.23
RCH855NP-391K	391K	390±10%	1.67	0.41	0.22
RCH855NP-471K	471K	470±10%	1.95	0.38	0.20
RCH855NP-561K	561K	560±10%	2.83	0.35	0.16
RCH855NP-681K	681K	680±10%	3.25	0.32	0.15
RCH855NP-821K	821K	820±10%	3.82	0.31	0.14
RCH855NP-102K	102K	1000±10%	5.28	0.25	0.12
RCH855NP-122K	122K	1200±10%	6.03	0.23	0.11
RCH855NP-152K	152K	1500±10%	7.15	0.21	99m
RCH855NP-182K	182K	1800±10%	8.26	0.20	90m
RCH855NP-222K	222K	2200±10%	11.1	0.18	81m
RCH855NP-272K	272K	2700±10%	13.1	0.16	77m

**Type: RCH-855**

Part Name	Stamp	Inductance <Within>( $\mu$ H) ※ 1	D.C.R( $\Omega$ ) <Max.> (at20°C)	Saturation Current (A)※2	Temperature rise current (A)※3
RCH855NP-332K	332K	3300 $\pm$ 10%	15.9	0.14	68m
RCH855NP-392K	392K	3900 $\pm$ 10%	18.0	0.13	65m
RCH855NP-472K	472K	4700 $\pm$ 10%	23.9	0.12	56m
RCH855NP-562K	562K	5600 $\pm$ 10%	26.8	0.11	53m
RCH855NP-682K	682K	6800 $\pm$ 10%	31.7	98m	49m
RCH855NP-822K	822K	8200 $\pm$ 10%	46.5	88m	40m
RCH855NP-1Ø3K	103K	10000 $\pm$ 10%	55.7	81m	37m

※1: Measuring Frequency: 2.5  $\mu$  H ~ 8.2  $\mu$  H at 7.96MHz  
 10  $\mu$  H ~ 82  $\mu$  H at 2.52 MHz  
 100  $\mu$  H ~ 10000  $\mu$  H at 1 kHz

※2: Saturation current: The DC current at which the inductance decreases to 90% of its initial value.

※3: Temperature rise current: The DC current at which the temperature rise is  $\Delta t = 20^\circ\text{C}$ . ( $T_a = 20^\circ\text{C}$ ).