

**MQ SERIES**

**P26TG-XXXXZ4:1 1.5 KV ISOLATED 6 W REGULATED DUAL OUTPUT DIP24**

**Available Inputs:**

**24 and 48 VDC Wide Input 4:1**

**Available Outputs:**

**(+/-) 3.3, 5, 12, 15 and 18 VDC**

Other specifications please enquire.

**Electrical Specifications**

(Typical at + 25° C, nominal input voltage, rated output current unless otherwise specified)

**Input Specifications**

Voltage range 9 - 36 VDC (24 VDC), 18 - 72 VDC (48 VDC)

Filter Pi Network

**Isolation Specifications**

Rated voltage 1500 Vdc

Leakage current 1 mA

Resistance 10<sup>9</sup> Ohm

Capacitance 80 pF typ.

**Output Specifications**

Voltage accuracy +/- 1 % typ. +/-2% max.

Ripple and noise (at 20 MHz BW) 60 mV p-p, max.

Short circuit protection Continuous , restart automatic

Line voltage regulation +/- 0,5 % max.

Load voltage regulation +/- 0,5 % max.

Temperature coefficient +/- 0,02 % / °C

**General Specifications**

Efficiency 70 % to 85 %

Switching frequency 250 KHz, typ.

**Environmental Specifications**

Operating temperature (ambient) -40°C to +85°C

Storage temperature - 55 °C to + 125 °C

Derating See graph

Humidity Up to 90 %, non condensing

Cooling Free air convection

**Physical Characteristics**

Dimensions 31,75 x 20,32 x 10,16 mm

1,25 x 0,80 x 0,40 inches


Weight 21,5 g

Case material Non conductive black plastic


**Examples of Partnumbers/Modelcode**

PART NO.	INPUT VOLTAGE (VDC) Nominal	INPUT CURRENT NO LOAD	INPUT CURRENT FULL LOAD	OUTPUT VOLTAGE (VDC)	OUTPUT CURRENT (max. mA)	EFFICIENCY FULL LOAD (% TYP.)
P26TG-2405Z4:1	9-36	20	325	+/- 5	+/- 600	77
P26TG-2412Z4:1	9-36	21	316	+/- 12	+/- 250	79
P26TG-4805Z4:1	18-72	20	158	+/- 5	+/-600	79
P26TG-4812Z4:1	18-72	20	158	+/- 12	+/- 250	79

**Dimensions**

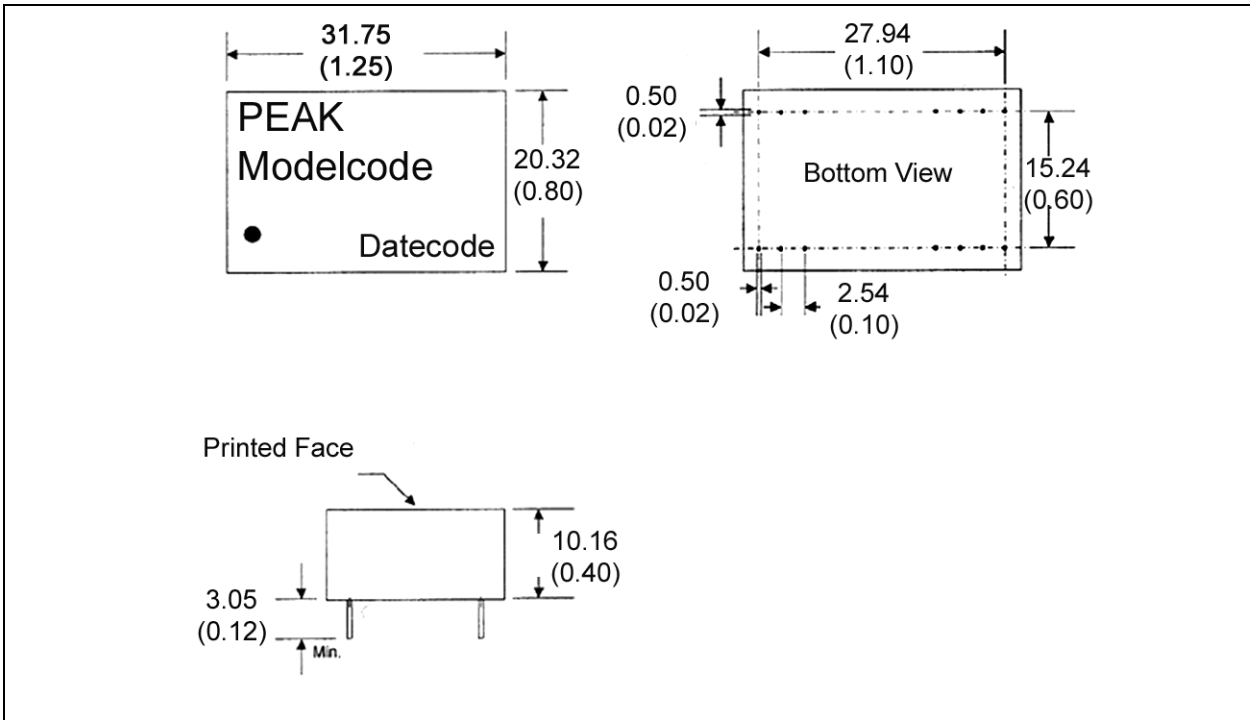

**Derating Graph and Pinning**

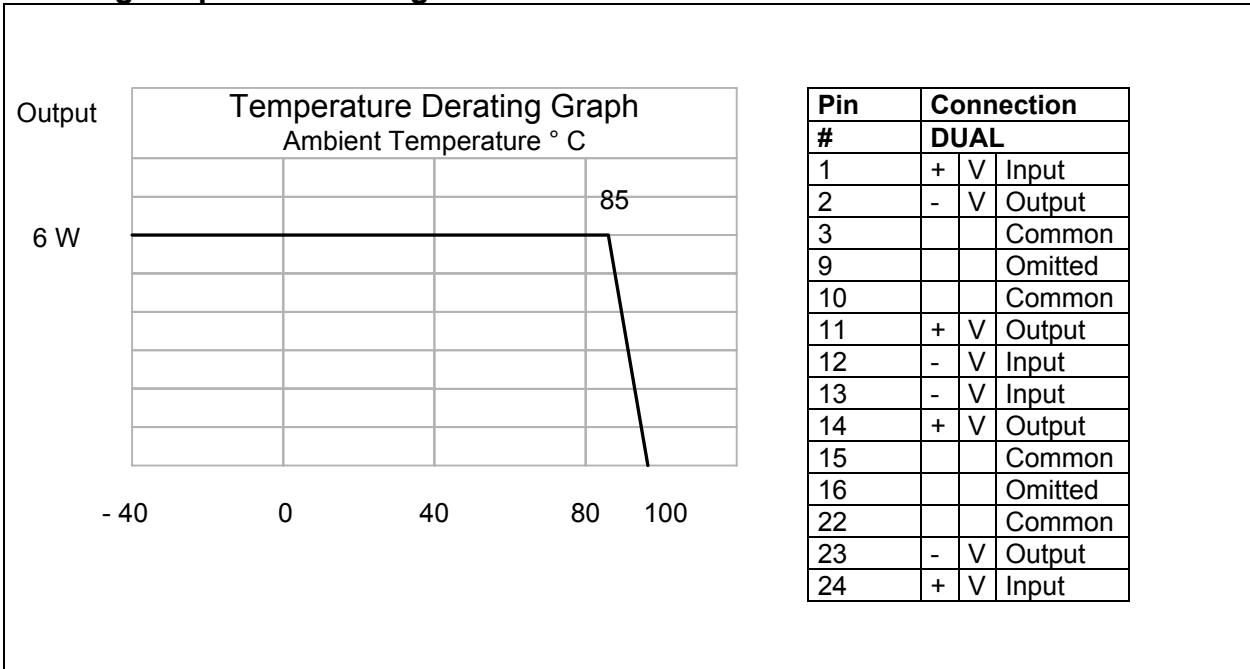

Specification can be changed without notice.

Copyright PEAK electronics GmbH